

PyHelpers

An open-source toolkit for facilitating Python users' data manipulation tasks

Release 1.5.2

Qian Fu

Birmingham Centre for Railway Research and Education

School of Engineering

University of Birmingham

First release: **September 2019**

Last updated: **September 2023**

© Copyright 2019-2023, Qian Fu

Table of Contents

1	About PyHelpers	1
2	Installation	2
3	Modules	3
3.1	settings	3
3.1.1	Configurations	3
3.1.2	Preferences	4
3.2	dirs	11
3.2.1	Directory navigation	11
3.2.2	Directory validation	14
3.2.3	Directory/file control	18
3.3	ops	21
3.3.1	General use	21
3.3.2	Basic data manipulation	29
3.3.3	Basic computation	42
3.3.4	Graph plotting	45
3.3.5	Web data extraction	48
3.4	store	59
3.4.1	Data saving	59
3.4.2	Data loading	71
3.4.3	File decompression	80
3.4.4	File conversion	82
3.5	geom	85
3.5.1	Geometric data transformation	85
3.5.2	Geometric data computation	92
3.5.3	Geometric data sketching	105
3.6	text	107
3.6.1	Textual data preprocessing	107
3.6.2	Textual data computation	110
3.6.3	Textual data comparison	115
3.7	dbms	117
3.7.1	Databases	118
3.7.2	Database tools/utilities	173

4	Contributors	178
5	License	179
6	Quick start	180
6.1	Preparation - Create a data set	180
6.2	Alter settings for display of data	181
6.3	Specify a directory or a file path	183
6.4	Save data to / load data from a Pickle file	186
6.5	Convert coordinates between OSGB36 and WGS84	187
6.6	Find similar texts	188
6.7	Download an image file	189
6.8	Work with a PostgreSQL server	191
6.8.1	Connect to a database	191
6.8.2	Import data into a database	194
6.8.3	Fetch data from a database	197
6.8.4	Delete data	197
	Python Module Index	199
	Index	200

List of Figures

1	An example figure, before applying the function <code>mpl_preferences()</code>	6
2	After applying the function <code>mpl_preferences()</code>	6
3	An example of discrete colour ramp, created by the function <code>cmap_discretisation()</code>	46
4	An example of colour bar with numerical index, created by the function <code>colour_bar_index()</code>	47
5	An example of colour bar with textual index, created by the function <code>colour_bar_index()</code>	48
6	The Python Logo.	55
7	An example figure created for the function <code>save_svg_as_emf()</code>	67
8	An example figure created for the function <code>save_fig()</code>	68
9	An example of projecting a point onto a line.	91
10	An example of sorting a sequence of points given the shortest path.	99
11	An example of a sketch of a square, created by the function <code>sketch_square()</code>	106
12	An example of a sketch of a square rotated 75 degrees anticlockwise about the centre.	107
13	The table “ <code>test_table</code> ” (with a primary key) in the database.	135
14	The table “ <code>test_table</code> ” in the database “ <code>testdb</code> ”.	140
15	The table “ <code>test_table</code> ” in the database “ <code>testdb</code> ” (after converting ‘null’ to empty string).	140
16	The table “ <code>points</code> ”.“ <code>England</code> ” in the database “ <code>testdb</code> ”.	143
17	The table <code>[dbo].[example_df]</code> in the database <code>[testdb]</code>	167
18	The table <code>[dbo].[example_df]</code> in the Microsoft SQL Server database <code>[testdb]</code>	176
19	The table “ <code>dbo</code> ”.“ <code>example_df</code> ” in the PostgreSQL database “ <code>testdb</code> ”	177
20	The Python Logo (for illustration in the brief tutorial).	190
21	The database “ <code>pyhelpers_tutorial</code> ”	192
22	The database “ <code>pyhelpers_tutorial_alt</code> ”	193
23	The table “ <code>public</code> ”.“ <code>df_table</code> ”	195
24	The table “ <code>public</code> ”.“ <code>df_table_alt</code> ”	196

Chapter 1

About PyHelpers

PyHelpers is a lightweight open-source Python package designed as a versatile toolkit for simplifying data (pre)processing tasks. It offers a comprehensive range of practical utilities to facilitate common data manipulation operations. These utilities encompass the ability to read and write file-like objects, efficiently handle various data types such as geographical and textual data, and establish streamlined communication with relational databases like PostgreSQL and Microsoft SQL Server.

Chapter 2

Installation

To install the latest release of PyHelpers from PyPI via pip:

```
pip install --upgrade pyhelpers
```

To install the most recent version of PyHelpers hosted on GitHub:

```
pip install --upgrade git+https://github.com/mikeqfu/pyhelpers.git
```

Note:

- If using a virtual environment, make sure it is activated.
 - It is recommended to add `pip install` the option `--upgrade` (or `-U`) to ensure that you are getting the latest stable release of the package.
 - Not all dependencies of PyHelpers are enforced to be installed along with the installation of the package. This is intended to optimise the installation requirements. If a `ModuleNotFoundError` or an `ImportError` pops out when importing/running a function, first try to install the module(s)/package(s) mentioned in the error message, and then try importing/running the function again.
 - For Windows users, `pip` may possibly fail to install some packages. In such circumstances, try instead to install their `.whl files`, which can be downloaded from the web page of the [unofficial Windows binaries for Python extension packages](#).
 - For more general instructions on the installation of Python packages, please refer to the official guide of [Installing Packages](#).
-

To check whether `pyhelpers` has been correctly installed, try to import the package via an interpreter shell:

```
>>> import pyhelpers  
>>> pyhelpers.__version__ # Check the latest version
```

The latest version is: 1.5.2

Chapter 3

Modules

The current release includes the following modules, with each containing a number of utilities:

<i>settings</i>	Settings of working environment.
<i>dirs</i>	Manipulation of directories and/or file paths.
<i>ops</i>	Miscellaneous operations.
<i>store</i>	Saving, loading and other relevant operations of file-like objects.
<i>geom</i>	Manipulation of geometric/geographical data.
<i>text</i>	Manipulation of textual data.
<i>dbms</i>	Communication with databases.

3.1 settings

Settings of working environment.

3.1.1 Configurations

GDAL/OGR

<i>gdal_configurations</i> ([reset, ...])	Alter some default configuration options of GDAL/OGR drivers.
-------------------------------------------	---------------------------------------------------------------

gdal_configurations

```
pyhelpers.settings.gdal_configurations(reset=False, max_tmpfile_size=None,
interleaved_reading=True, custom_indexing=False,
compress_nodes=True)
```

Alter some default configuration options of [GDAL/OGR](#) drivers.

Parameters

- **reset** (*bool*) – whether to reset to default settings, defaults to False
- **max_tmpfile_size** (*int / None*) – maximum size of the temporary file, defaults to None
- **interleaved_reading** (*bool*) – whether to enable interleaved reading, defaults to True
- **custom_indexing** (*bool*) – whether to enable custom indexing, defaults to False
- **compress_nodes** (*bool*) – whether to compress nodes in temporary DB. defaults to True

Examples:

```
>>> from pyhelpers.settings import gdal_configurations
>>> gdal_configurations()
```

Note: This can be useful when using [GDAL](#) to parse a large PBF file. For example, `gdal_configurations()` is applied by default when importing the package [pydriosm](#), which can be used to work with [OpenStreetMap](#) data of [PBF](#) format.

See also:

- [OpenStreetMap XML and PBF](#)
- [pydriosm Documentation](#)

3.1.2 Preferences

Matplotlib

<code>mpl_preferences([reset, backend, font_name, ...])</code>	Alter some Matplotlib parameters.
----------------------------------------------------------------	---------------------------------------------------

mpl_preferences

```
pyhelpers.settings.mpl_preferences(reset=False, backend=None, font_name='Times New Roman',
                                    font_size=13, legend_spacing=0.7, fig_style=None)
```

Alter some Matplotlib parameters.

Parameters

- **backend** (*str* / *None*) – specify the backend used for rendering and GUI integration, defaults to *None*
- **font_name** (*None* / *str*) – name of a font to be used, defaults to 'Times New Roman'
- **font_size** (*int* / *float*) – font size, defaults to 13
- **legend_spacing** (*float* / *int*) – spacing between labels in plot legend, defaults to 0.7
- **fig_style** (*str* / *None*) – style of the figure, defaults to *None*
- **reset** (*bool*) – whether to reset to default settings, defaults to *False*

Examples:

```
>>> import numpy as np
>>> import matplotlib.pyplot as plt

>>> np.random.seed(0)

>>> random_array = np.random.rand(1000, 2)
>>> random_array
array([[0.5488135 ,  0.71518937],
       [0.60276338,  0.54488318],
       [0.4236548 ,  0.64589411],
       ...,
       [0.41443887,  0.79128155],
       [0.72119811,  0.48010781],
       [0.64386404,  0.50177313]])


>>> def example_plot(arr):
...     fig = plt.figure(constrained_layout=True)
...     ax = fig.add_subplot(aspect='equal', adjustable='box')
...
...     ax.scatter(arr[:500, 0], arr[:500, 1], label='Group0')
...     ax.scatter(arr[500:, 0], arr[500:, 1], label='Group1')
...     ax.legend(frameon=False, bbox_to_anchor=(1.0, 0.95))
...
...     plt.show()

>>> example_plot(random_array)
```

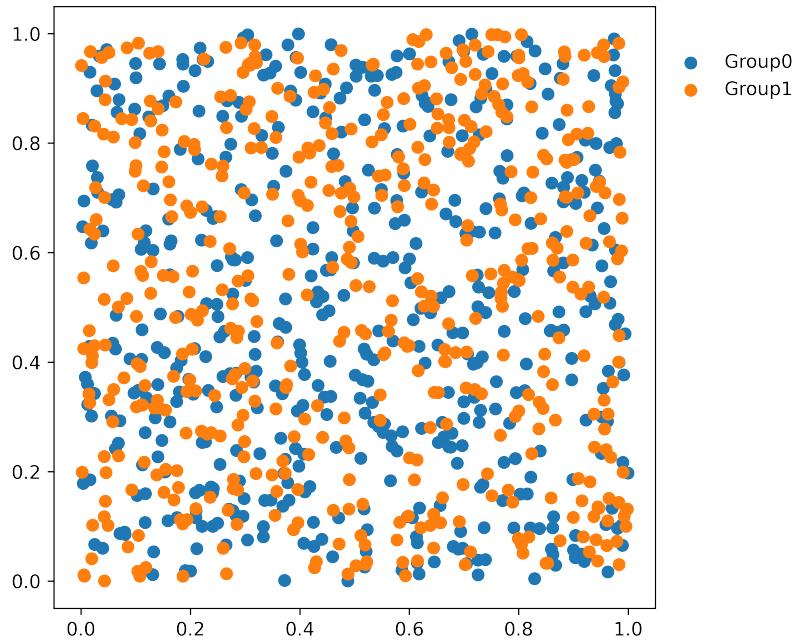


Fig. 1: An example figure, before applying the function `mpl_preferences()`.

```
>>> from pyhelpers.settings import mpl_preferences
>>> mpl_preferences(fig_style='ggplot')
>>> example_plot(random_array)
```

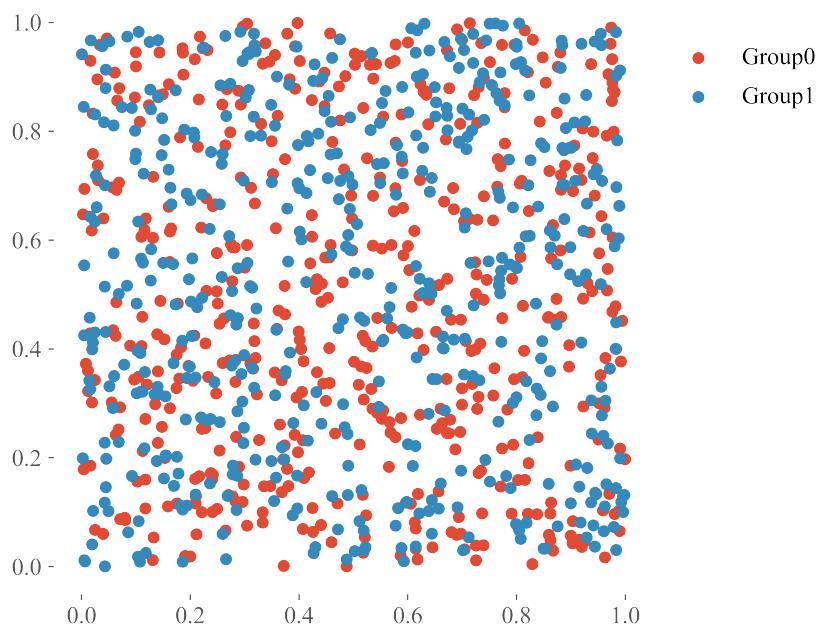


Fig. 2: After applying the function `mpl_preferences()`.

Reset to default settings:

```
>>> mpl_preferences(reset=True)

>>> # The altered parameters are now set to their default values.
>>> example_plot(random_array)
```

(The above code should display the same figure as Fig. 1.)

NumPy

<code>np_preferences([reset, precision, ...])</code>	Alter some default parameters for displaying NumPy arrays.
------------------------------------------------------	------------------------------------------------------------

np_preferences

`pyhelpers.settings.np_preferences(reset=False, precision=4, head_tail=5, line_char=120, formatter=None, **kwargs)`

Alter some default parameters for displaying NumPy arrays.

Parameters

- **reset** (`bool`) – whether to reset to the default print options set by `numpy.set_printoptions()`, defaults to False
- **precision** (`int`) – number of decimal points, which corresponds to precision of `numpy.set_printoptions()`, defaults to 4
- **line_char** (`int`) – number of characters per line for the purpose of inserting line breaks, which corresponds to linewidth of `numpy.set_printoptions()`, defaults to 120
- **head_tail** (`int`) – number of array items in summary at beginning (head) and end (tail) of each dimension, which corresponds to edgeitems of `numpy.set_printoptions()`, defaults to 5
- **formatter** (`dict` / `None`) – specified format, which corresponds to formatter of `numpy.set_printoptions()`, if None (default), fill the empty decimal places with zeros for the specified precision

Kwargs

[optional] parameters used by `numpy.set_printoptions()`

Examples:

```
>>> import numpy as np

>>> np.random.seed(0)

>>> random_array = np.random.rand(100, 100)
>>> random_array
array([[0.5488135 , 0.71518937, 0.60276338, ..., 0.02010755, 0.82894003,
       0.00469548],
```

(continues on next page)

(continued from previous page)

```
[0.67781654, 0.27000797, 0.73519402, ..., 0.25435648, 0.05802916,
 0.43441663],
[0.31179588, 0.69634349, 0.37775184, ..., 0.86219152, 0.97291949,
 0.96083466],
...,
[0.89111234, 0.26867428, 0.84028499, ..., 0.5736796, 0.73729114,
 0.22519844],
[0.26969792, 0.73882539, 0.80714479, ..., 0.94836806, 0.88130699,
 0.1419334],
[0.88498232, 0.19701397, 0.56861333, ..., 0.75842952, 0.02378743,
 0.81357508]])

>>> from pyhelpers.settings import np_preferences

>>> np_preferences(precision=2)

>>> random_array
array([[0.55, 0.72, 0.60, 0.54, 0.42, ..., 0.18, 0.59, 0.02, 0.83, 0.00],
       [0.68, 0.27, 0.74, 0.96, 0.25, ..., 0.49, 0.23, 0.25, 0.06, 0.43],
       [0.31, 0.70, 0.38, 0.18, 0.02, ..., 0.22, 0.10, 0.86, 0.97, 0.96],
       [0.91, 0.77, 0.33, 0.08, 0.41, ..., 0.96, 0.36, 0.36, 0.02, 0.19],
       [0.40, 0.93, 0.10, 0.95, 0.87, ..., 0.27, 0.46, 0.40, 0.25, 0.51],
       ...,
       [0.03, 0.99, 0.09, 0.45, 0.84, ..., 0.12, 0.29, 0.37, 0.91, 0.14],
       [0.62, 0.20, 0.29, 0.45, 0.55, ..., 0.48, 0.87, 0.22, 0.14, 0.93],
       [0.89, 0.27, 0.84, 0.76, 1.00, ..., 0.98, 0.41, 0.57, 0.74, 0.23],
       [0.27, 0.74, 0.81, 0.20, 0.31, ..., 0.51, 0.23, 0.95, 0.88, 0.14],
       [0.88, 0.20, 0.57, 0.93, 0.56, ..., 0.55, 0.40, 0.76, 0.02, 0.81]])
```

Reset to default settings:

```
>>> np_preferences(reset=True)

>>> random_array
array([[0.54881350, 0.71518937, 0.60276338, ..., 0.02010755, 0.82894003,
       0.00469548],
       [0.67781654, 0.27000797, 0.73519402, ..., 0.25435648, 0.05802916,
       0.43441663],
       [0.31179588, 0.69634349, 0.37775184, ..., 0.86219152, 0.97291949,
       0.96083466],
       ...,
       [0.89111234, 0.26867428, 0.84028499, ..., 0.57367960, 0.73729114,
       0.22519844],
       [0.26969792, 0.73882539, 0.80714479, ..., 0.94836806, 0.88130699,
       0.14193340],
       [0.88498232, 0.19701397, 0.56861333, ..., 0.75842952, 0.02378743,
       0.81357508]])
```

Pandas

<code>pd_preferences([reset, max_columns, ...])</code>	Alter parameters of some frequently-used Pandas options and settings for displaying data frame.
--------------------------------------------------------	-------------------------------------------------------------------------------------------------

pd_preferences

```
pyhelpers.settings.pd_preferences(reset=False, max_columns=100, max_rows=20, precision=4,
                           east_asian_text=False, ignore_future_warning=True)
```

Alter parameters of some frequently-used Pandas options and settings for displaying data frame.

Parameters

- **reset** (`bool / str`) – whether to reset all to default settings, defaults to `False`
- **max_columns** (`int`) – maximum number of columns, which corresponds to '`display.max_columns`' for `pandas.set_option()`, defaults to `100`
- **max_rows** (`int`) – maximum number of rows, which corresponds to '`display.max_rows`' for `pandas.set_option()`, defaults to `20`
- **precision** (`int`) – number of decimal places, which corresponds to '`display.precision`' for `pandas.set_option()`, defaults to `4`
- **east_asian_text** (`bool`) – whether to adjust the display for east asian texts, defaults to `False`
- **ignore_future_warning** (`bool`) – whether to ignore/suppress future warnings, defaults to `True`

Examples:

```
>>> import numpy as np
>>> import pandas as pd

>>> np.random.seed(0)

>>> random_array = np.random.rand(100, 100)

>>> data_frame = pd.DataFrame(random_array)
>>> data_frame
      0         1         2       ...        97        98        99
0  0.548814  0.715189  0.602763  ...  0.020108  0.828940  0.004695
1  0.677817  0.270008  0.735194  ...  0.254356  0.058029  0.434417
2  0.311796  0.696343  0.377752  ...  0.862192  0.972919  0.960835
3  0.906555  0.774047  0.333145  ...  0.356707  0.016329  0.185232
4  0.401260  0.929291  0.099615  ...  0.401714  0.248413  0.505866
...     ...
95  0.029929  0.985128  0.094747  ...  0.369907  0.910011  0.142890
96  0.616935  0.202908  0.288809  ...  0.215006  0.143577  0.933162
```

(continues on next page)

(continued from previous page)

```

97  0.891112  0.268674  0.840285  ...  0.573680  0.737291  0.225198
98  0.269698  0.738825  0.807145  ...  0.948368  0.881307  0.141933
99  0.884982  0.197014  0.568613  ...  0.758430  0.023787  0.813575
[100 rows x 100 columns]

```

Limit to display of at most 6 columns and round the numbers to 2 decimal places:

```

>>> from pyhelpers.settings import pd_preferences

>>> pd_preferences(max_columns=6, precision=2)

>>> data_frame
      0    1    2    ...   97    98    99
0  0.55  0.72  0.60  ...  0.02  0.83  0.00
1  0.68  0.27  0.74  ...  0.25  0.06  0.43
2  0.31  0.70  0.38  ...  0.86  0.97  0.96
3  0.91  0.77  0.33  ...  0.36  0.02  0.19
4  0.40  0.93  0.10  ...  0.40  0.25  0.51
...  ...  ...  ...  ...  ...
95 0.03  0.99  0.09  ...  0.37  0.91  0.14
96 0.62  0.20  0.29  ...  0.22  0.14  0.93
97 0.89  0.27  0.84  ...  0.57  0.74  0.23
98 0.27  0.74  0.81  ...  0.95  0.88  0.14
99 0.88  0.20  0.57  ...  0.76  0.02  0.81
[100 rows x 100 columns]

```

Reset to default settings:

```

>>> pd_preferences(reset=True)

>>> data_frame
      0    1    2    ...   97    98    99
0  0.548814  0.715189  0.602763  ...  0.020108  0.828940  0.004695
1  0.677817  0.270008  0.735194  ...  0.254356  0.058029  0.434417
2  0.311796  0.696343  0.377752  ...  0.862192  0.972919  0.960835
3  0.906555  0.774047  0.333145  ...  0.356707  0.016329  0.185232
4  0.401260  0.929291  0.099615  ...  0.401714  0.248413  0.505866
...  ...  ...  ...  ...
95 0.029929  0.985128  0.094747  ...  0.369907  0.910011  0.142890
96 0.616935  0.202908  0.288809  ...  0.215006  0.143577  0.933162
97 0.891112  0.268674  0.840285  ...  0.573680  0.737291  0.225198
98 0.269698  0.738825  0.807145  ...  0.948368  0.881307  0.141933
99 0.884982  0.197014  0.568613  ...  0.758430  0.023787  0.813575
[100 rows x 100 columns]

```

Note:

- Default values of all available options can be checked by running `pandas.describe_option()` or `pandas._config.config._registered_options`

3.2 dirs

Manipulation of directories and/or file paths.

3.2.1 Directory navigation

<code>cd(*subdir[, mkdir, cwd, back_check])</code>	Get the full pathname of a directory (or file).
<code>go_from_altered_cwd(dir_name, **kwargs)</code>	Get the full pathname of an altered working directory.
<code>cdd(*subdir[, data_dir, mkdir])</code>	Get the full pathname of a directory (or file) under <code>data_dir</code> .
<code>cd_data(*subdir[, data_dir, mkdir])</code>	Get the full pathname of a directory (or file) under <code>data_dir</code> of a package.

cd

`pyhelpers.dirs.cd(*subdir, mkdir=False, cwd=None, back_check=False, **kwargs)`

Get the full pathname of a directory (or file).

Parameters

- `subdir` (`str` / `os.PathLike[str]` / `bytes` / `os.Path[bytes]`) – name of a directory or names of directories (and/or a filename)
- `mkdir` (`bool`) – whether to create a directory, defaults to `False`
- `cwd` (`str` / `os.PathLike[str]` / `bytes` / `os.Path[bytes]` / `None`) – current working directory, defaults to `None`
- `back_check` (`bool`) – whether to check if a parent directory exists, defaults to `False`
- `kwargs` – [optional] parameters (e.g. `mode=0o777`) of `os.makedirs`

Returns

full pathname of a directory or that of a file

Return type

`str`

Examples:

```
>>> from pyhelpers.dirs import cd
>>> import os
>>> import pathlib

>>> current_wd = cd() # Current working directory
>>> os.path.relpath(current_wd)
'.'

>>> # The directory will be created if it does not exist
```

(continues on next page)

(continued from previous page)

```
>>> path_to_tests_dir = cd("tests")
>>> os.path.relpath(path_to_tests_dir)
'tests'

>>> path_to_tests_dir = cd(pathlib.Path("tests"))
>>> os.path.relpath(path_to_tests_dir)
'tests'
```

go_from_altered_cwd

`pyhelpers.dirs.go_from_altered_cwd(dir_name, **kwargs)`

Get the full pathname of an altered working directory.

Parameters

- `dir_name` (`str` / `os.PathLike[str]` / `bytes` / `os.Path[bytes]`) – name of a directory
- `kwargs` – [optional] parameters of the function `pyhelpers.dirs.cd()`

Returns

full pathname of an altered working directory (changed from the directory `path_to_dir`)

Return type

`str`

Examples:

```
>>> from pyhelpers.dirs import go_from_altered_cwd
>>> import os

>>> init_cwd = os.getcwd()
>>> init_cwd
'<cwd>'

>>> # Change the current working directory to "/new_cwd"
>>> new_cwd = "\new_cwd"
>>> os.mkdir(new_cwd)
>>> os.chdir(new_cwd)

>>> # Get the full path to a folder named "tests"
>>> path_to_tests = go_from_altered_cwd(path_to_dir="tests")
>>> path_to_tests
'<new_cwd>\tests'

>>> # Get the full path to a directory one level above the current working directory
>>> path_to_tests_ = go_from_altered_cwd(path_to_dir="\tests")
>>> path_to_tests_ == os.path.join(os.path.dirname(os.getcwd()), "tests")
True

>>> os.chdir(init_cwd)
>>> os.rmdir(new_cwd)
```

cdd

`pyhelpers.dirs.cdd(*subdir, data_dir='data', mkdir=False, **kwargs)`

Get the full pathname of a directory (or file) under `data_dir`.

Parameters

- `subdir` (`str` / `os.PathLike` [`str`] / `bytes` / `os.Path` [`bytes`]) – name of directory or names of directories (and/or a filename)
- `data_dir` (`str` / `os.PathLike` [`str`] / `bytes` / `os.Path` [`bytes`]) – name of a directory where data is (or will be) stored, defaults to "data"
- `mkdir` (`bool`) – whether to create a directory, defaults to `False`
- `kwargs` – [optional] parameters of the function `pyhelpers.dirs.cd()`

Return path

full pathname of a directory (or a file) under `data_dir`

Return type

`str`

Examples:

```
>>> from pyhelpers.dirs import cdd, delete_dir
>>> import os

>>> path_to_dat_dir = cdd()
>>> # As `mkdir=False`, `path_to_dat_dir` will NOT be created if it doesn't exist
>>> os.path.relpath(path_to_dat_dir)
'data'

>>> path_to_dat_dir = cdd(data_dir="test_cdd", mkdir=True)
>>> # As `mkdir=True`, `path_to_dat_dir` will be created if it doesn't exist
>>> os.path.relpath(path_to_dat_dir)
'test_cdd'

>>> # Delete the "test_cdd" folder
>>> delete_dir(path_to_dat_dir, verbose=True)
To delete the directory "test_cdd\"?
? [No]|Yes: yes
Deleting "test_cdd\" ... Done.

>>> # Set `data_dir` to be "tests"
>>> path_to_dat_dir = cdd("data", data_dir="test_cdd", mkdir=True)
>>> os.path.relpath(path_to_dat_dir)
'test_cdd\data'

>>> # Delete the "test_cdd" folder and the sub-folder "data"
>>> test_cdd = os.path.dirname(path_to_dat_dir)
>>> delete_dir(test_cdd, verbose=True)
The directory "test_cdd\" is not empty.
Confirmed to delete it
? [No]|Yes: yes
Deleting "test_cdd\" ... Done.

>>> # # Alternatively,
```

(continues on next page)

(continued from previous page)

```
>>> # import shutil
>>> # shutil.rmtree(test_cdd)
```

cd_data

`pyhelpers.dirs.cd_data(*subdir, data_dir='data', mkdir=False, **kwargs)`

Get the full pathname of a directory (or file) under `data_dir` of a package.

Parameters

- `subdir` (`str` / `os.PathLike[str]` / `bytes` / `os.Path[bytes]`) – name of directory or names of directories (and/or a filename)
- `data_dir` (`str` / `os.PathLike[str]` / `bytes` / `os.Path[bytes]`) – name of a directory to store data, defaults to "data"
- `mkdir` (`bool`) – whether to create a directory, defaults to False
- `kwargs` – [optional] parameters (e.g. `mode=0o777`) of `os.makedirs`

Returns

full pathname of a directory or that of a file under `data_dir` of a package

Return type

`str`

Examples:

```
>>> from pyhelpers.dirs import cd_data
>>> import os

>>> path_to_dat_dir = cd_data("tests", mkdir=False)

>>> os.path.relpath(path_to_dat_dir)
'pyhelpers\data\tests'
```

3.2.2 Directory validation

<code>path2linux(path)</code>	Convert path to an uniformat (Linux) file path, which is executable in Windows, Linux and macOS.
<code>uniform.pathname(pathname)</code>	An alternative to the function <code>path2linux()</code> .
<code>is_dir(path_to_dir)</code>	Check whether a directory-like string is a (valid) directory name.
<code>validate_dir([path_to_dir, subdir, msg])</code>	Validate the pathname of a directory.
<code>validate_filename(file_pathname[, suffix_num])</code>	If the filename exist, then create new filename with a suffix such as "(1)", "(2)", and so on.

path2linux

`pyhelpers.dirs.path2linux(path)`

Convert path to an uniformat (Linux) file path, which is executable in Windows, Linux and macOS.

- Format the file path to be used for cross-platform compatibility;
- Convert OS path to standard Linux path.

Parameters

`path (str / os.PathLike / bytes)` – absolute or relative pathname

Returns

standard linux pathname

Return type

str

Examples:

```
>>> from pyhelpers.dirs import path2linux
>>> import pathlib

>>> path2linux("tests\data\dat.csv")
'tests/data/dat.csv'

>>> path2linux(pathlib.Path("tests\data\dat.csv"))
'tests/data/dat.csv'
```

uniform.pathname

`pyhelpers.dirs.uniform.pathname(pathname)`

An alternative to the function `path2linux()`.

Parameters

`pathname (str / pathlib.Path)` – absolute or relative pathname

Returns

standard linux pathname

Return type

str

Examples:

```
>>> from pyhelpers.dirs import uniform.pathname
>>> import pathlib

>>> uniform.pathname("tests\data\dat.csv")
'tests/data/dat.csv'

>>> uniform.pathname("tests//data/dat.csv")
```

(continues on next page)

(continued from previous page)

```
'tests/data/dat.csv'

>>> uniform.pathname(pathlib.Path("tests\data\dat.csv"))
'tests\data\dat.csv'
```

is_dir

`pyhelpers.dirs.is_dir(path_to_dir)`

Check whether a directory-like string is a (valid) directory name.

See also [DIRS-IVD-1] and [DIRS-IVD-2].

Parameters

`path_to_dir (str / bytes)` – pathname of a directory

Returns

whether the input is a path-like string that describes a directory name

Return type

`bool`

Examples:

```
>>> from pyhelpers.dirs import cd, is_dir

>>> x = "tests"
>>> is_dir(x)
False

>>> x = "/tests"
>>> is_dir(x)
True

>>> x = cd("tests")
>>> is_dir(x)
True
```

validate_dir

`pyhelpers.dirs.validate_dir(path_to_dir=None, subdir='', msg='Invalid input!', **kwargs)`

Validate the pathname of a directory.

Parameters

- `path_to_dir (str / os.PathLike [str] / bytes / os.Path [bytes] / None)` – pathname of a data directory, defaults to `None`
- `subdir (str / os.PathLike [str] / bytes / os.Path [bytes])` – name of a subdirectory to be examined if `directory=None`, defaults to `" "`
- `msg (str)` – error message if `data_dir` is not a full pathname, defaults to `"Invalid input!"`

- **kwargs** – [optional] parameters of the function `pyhelpers.dirs.cd()`

Returns

valid full pathname of a directory

Return type

str

Examples:

```
>>> from pyhelpers.dirs import validate_dir
>>> import os

>>> dat_dir = validate_dir()
>>> os.path.relpath(dat_dir)
'.'

>>> dat_dir = validate_dir("tests")
>>> os.path.relpath(dat_dir)
'tests'

>>> dat_dir = validate_dir(subdir="data")
>>> os.path.relpath(dat_dir)
'data'
```

validate_filename

`pyhelpers.dirs.validate_filename(file_pathname, suffix_num=1)`

If the filename exist, then create new filename with a suffix such as "(1)", "(2)", and so on.

Parameters

- **file_pathname** (str) – pathname of a file
- **suffix_num** (int) – a number as a suffix appended to the filename, defaults to 1

Returns

a validated file name

Return type

str

Examples:

```
>>> from pyhelpers.dirs import validate_filename
>>> import os

>>> test_file_pathname = "tests/data/test.txt"

>>> # When the file does not exist, return the same file name
>>> os.path.exists(test_file_pathname)
False
>>> file_pathname_0 = validate_filename(test_file_pathname)
>>> os.path.relpath(file_pathname_0)
'tests\data\test.txt'
```

(continues on next page)

(continued from previous page)

```

>>> # Create a file named "test.txt"
>>> open(test_file_pathname, 'w').close()
>>> os.path.exists(test_file_pathname)
True
>>> # As "test.txt" exists, the function returns a new pathname ending with "test(1).txt"
>>> file_pathname_1 = validate_filename(test_file_pathname)
>>> os.path.relpath(file_pathname_1)
'tests\data\test(1).txt'

>>> # When "test(1).txt" exists, the function returns a pathname of a file named "test(2).txt"
>>> open(file_pathname_1, 'w').close()
>>> os.path.exists(file_pathname_1)
True
>>> file_pathname_2 = validate_filename(test_file_pathname)
>>> os.path.relpath(file_pathname_2)
'tests\data\test(2).txt'

>>> # Remove the created files
>>> for x in [file_pathname_0, file_pathname_1]:
...     os.remove(x)

```

3.2.3 Directory/file control

<code>get_file_pathnames(path_to_dir[, file_ext, ...])</code>	Get all files in the folder with the specified file type.
<code>check_files_exist(filenames, path_to_dir)</code>	Check if queried files exist in a given directory.
<code>delete_dir(path_to_dir[, ...])</code>	Delete a directory or directories.

get_file_pathnames

`pyhelpers.dirs.get_file_pathnames(path_to_dir, file_ext=None, incl_subdir=False)`

Get all files in the folder with the specified file type.

Parameters

- `path_to_dir (str / os.PathLike)` – a folder path
- `file_ext (str / None)` – exact file type to specify, if file_type is "*" or "all", return all files in the folder; defaults to None
- `incl_subdir (bool)` – whether to get files inside the subfolder, defaults to False; when incl_subdir=True, the function traverses all subfolders

Returns

a list of file paths

Return type

list

Examples:

```
>>> from pyhelpers.dirs import get_file_pathnames

>>> test_dir_name = "tests/data"

>>> # Get all files in the folder (without sub-folders)
>>> get_file_pathnames(test_dir_name)
['tests/data/csr_mat.npz',
 'tests/data/dat.csv',
 'tests/data/dat.feather',
 'tests/data/dat.joblib',
 'tests/data/dat.json',
 'tests/data/dat.pickle',
 'tests/data/dat.txt',
 'tests/data/dat.xlsx',
 'tests/data/zipped',
 'tests/data/zipped.7z',
 'tests/data/zipped.txt',
 'tests/data/zipped.zip']

>>> get_file_pathnames(test_dir_name, file_ext=".txt")
['tests/data/dat.txt', 'tests/data/zipped.txt']

>>> # Get absolute pathnames of all files contained in the folder (incl. all sub-folders)
>>> get_file_pathnames(test_dir_name, file_ext="txt", incl_subdir=True)
['tests/data/dat.txt', 'tests/data/zipped.txt', 'tests/data/zipped/zipped.txt']
```

check_files_exist

`pyhelpers.dirs.check_files_exist(filenames, path_to_dir)`

Check if queried files exist in a given directory.

Parameters

- `filenames (list)` – a list of filenames
- `path_to_dir (str / os.PathLike)` – a list of filenames in the directory

Returns

True if all the queried files exist, False otherwise

Return type

`bool`

Examples:

```
>>> from pyhelpers.dirs import check_files_exist

>>> test_dir_name = "tests/data"

>>> # Check if all required files exist in the directory
>>> check_files_exist(["dat.csv", "dat.txt"], test_dir_name)
True

>>> # If not all required files exist, print the missing files
>>> check_files_exist(["dat.csv", "dat.txt", "dat_0.txt"], test_dir_name)
```

(continues on next page)

(continued from previous page)

```
Error: Required files are not satisfied, missing files are: ['dat_0.txt']
False
```

delete_dir

`pyhelpers.dirs.delete_dir(path_to_dir, confirmation_required=True, verbose=False, **kwargs)`

Delete a directory or directories.

Parameters

- `path_to_dir` (`str` / `bytes` / `os.PathLike` [`str`] / `os.PathLike` [`bytes`] / `collections.abc.Sequence`) – pathname (or pathnames) of a directory (or directories)
- `confirmation_required` (`bool`) – whether to prompt a message for confirmation to proceed, defaults to `True`
- `verbose` (`bool` / `int`) – whether to print relevant information in console as the function runs, defaults to `False`
- `kwargs` – [optional] parameters of `shutil.rmtree` or `os.rmdir`

Examples:

```
>>> from pyhelpers.dirs import cd, delete_dir
>>> import os

>>> test_dirs = []
>>> for x in range(3):
...     test_dirs.append(cd("tests", f"test_dir{x}", mkdir=True))
...     if x == 0:
...         cd("tests", f"test_dir{x}", "a_folder", mkdir=True)
...     elif x == 1:
...         open(cd("tests", f"test_dir{x}", "file"), 'w').close()

>>> delete_dir(path_to_dir=test_dirs, verbose=True)
To delete the following directories:
"tests\test_dir0\" (Not empty)
"tests\test_dir1\" (Not empty)
"tests\test_dir2\""
? [No]|Yes: yes
Deleting "tests\test_dir0\" ... Done.
Deleting "tests\test_dir1\" ... Done.
Deleting "tests\test_dir2\" ... Done.
```

3.3 ops

Miscellaneous operations.

3.3.1 General use

<code>confirmed([prompt, confirmation_required, resp])</code>	Type to confirm whether to proceed or not.
<code>get_obj_attr(obj[, col_names, as_dataframe])</code>	Get main attributes of an object.
<code>eval_dtype(str_val)</code>	Convert a string to its intrinsic data type.
<code>gps_to_utc(gps_time)</code>	Convert standard GPS time to UTC time.
<code>parse_size(size[, binary, precision])</code>	Parse size from / into readable format of bytes.
<code>get_number_of_chunks(file_or_obj[, ...])</code>	Get total number of chunks of a data file, given a minimum limit of chunk size.
<code>get_relative_path(pathname)</code>	Get the relative or absolute path of pathname to the current working directory.
<code>find_executable(name[, options, target])</code>	Get pathname of an executable file for a specified application.
<code>hash_password(password[, salt, salt_size, ...])</code>	Hash a password using <code>hashlib.pbkdf2_hmac</code> .
<code>verify_password(password, salt, key[, ...])</code>	Verify a password given salt and key.
<code>func_running_time(func)</code>	A decorator to measure the time of a function or class method.

confirmed

`pyhelpers.ops.confirmed(prompt=None, confirmation_required=True, resp=False)`

Type to confirm whether to proceed or not.

See also [OPS-C-1].

Parameters

- `prompt (str / None)` – a message that prompts a response (Yes/No), defaults to None
- `confirmation_required (bool)` – whether to require users to confirm and proceed, defaults to True
- `resp (bool)` – default response, defaults to False

Returns

a response

Return type

bool

Examples:

```
>>> from pyhelpers.ops import confirmed

>>> if confirmed(prompt="Testing if the function works?", resp=True):
...     print("Passed.")
Testing if the function works? [Yes] |No: yes
Passed.
```

get_obj_attr

`pyhelpers.ops.get_obj_attr(obj, col_names=None, as_dataframe=False)`

Get main attributes of an object.

Parameters

- `obj (object)` – an object, e.g. a class
- `col_names (list)` – a list of column names
- `as_dataframe (bool)` – whether to return the data in tabular format, defaults to False

Returns

list or tabular data of the main attributes of the given object

Return type

`pandas.DataFrame`

Examples:

```
>>> from pyhelpers.ops import get_obj_attr
>>> from pyhelpers.dbms import PostgreSQL

>>> postgres = PostgreSQL()
Password (postgres@localhost:5432): ***
Connecting postgres:***@localhost:5432/postgres ... Successfully.

>>> obj_attr = get_obj_attr(postgres, as_dataframe=True)
>>> obj_attr.head()
   attribute      value
0  DEFAULT_DATABASE    postgres
1  DEFAULT_DIALECT    postgresql
2  DEFAULT_DRIVER     psycopg2
3  DEFAULT_HOST       localhost
4  DEFAULT_PORT        5432

>>> obj_attr.Attribute.to_list()
['DEFAULT_DATABASE',
 'DEFAULT_DIALECT',
 'DEFAULT_DRIVER',
 'DEFAULT_HOST',
 'DEFAULT_PORT',
 'DEFAULT_SCHEMA',
 'DEFAULT_USERNAME',
 'address',
 'database_info',
```

(continues on next page)

(continued from previous page)

```
'database_name',
'engine',
'host',
'port',
'url',
'username']
```

eval_dtype

`pyhelpers.ops.eval_dtype(str_val)`

Convert a string to its intrinsic data type.

Parameters

`str_val (str)` – a string-type variable

Returns

converted value

Return type

any

Examples:

```
>>> from pyhelpers.ops import eval_dtype

>>> val_1 = '1'
>>> origin_val = eval_dtype(val_1)
>>> origin_val
1

>>> val_2 = '1.1.1'
>>> origin_val = eval_dtype(val_2)
>>> origin_val
'1.1.1'
```

gps_to_utc

`pyhelpers.ops.gps_to_utc(gps_time)`

Convert standard GPS time to UTC time.

Parameters

`gps_time (float)` – standard GPS time

Returns

UTC time

Return type

`datetime.datetime`

Examples:

```
>>> from pyhelpers.ops import gps_to_utc

>>> utc_dt = gps_to_utc(gps_time=1271398985.7822514)
>>> utc_dt
datetime.datetime(2020, 4, 20, 6, 23, 5, 782251)
```

parse_size

`pyhelpers.ops.parse_size(size, binary=True, precision=1)`

Parse size from / into readable format of bytes.

Parameters

- `size (str / int / float)` – human- or machine-readable format of size
- `binary (bool)` – whether to use binary (i.e. factorized by 1024) representation, defaults to True; if binary=False, use the decimal (or metric) representation (i.e. factorized by $10^{** 3}$)
- `precision (int)` – number of decimal places (when converting size to human-readable format), defaults to 1

Returns

parsed size

Return type

int | str

Examples:

```
>>> from pyhelpers.ops import parse_size

>>> parse_size(size='123.45 MB')
129446707

>>> parse_size(size='123.45 MB', binary=False)
123450000

>>> parse_size(size='123.45 MiB', binary=True)
129446707
>>> # If a metric unit (e.g. 'MiB') is specified in the input,
>>> # the function returns a result accordingly, no matter whether `binary` is True or False
>>> parse_size(size='123.45 MiB', binary=False)
129446707

>>> parse_size(size=129446707, precision=2)
'123.45 MiB'

>>> parse_size(size=129446707, binary=False, precision=2)
'129.45 MB'
```

get_number_of_chunks

`pyhelpers.ops.get_number_of_chunks(file_or_obj, chunk_size_limit=50, binary=True)`

Get total number of chunks of a data file, given a minimum limit of chunk size.

Parameters

- `file_or_obj (str)` – absolute path to a file
- `chunk_size_limit (int / float / None)` – the minimum limit of file size (in mebibyte i.e. MiB, or megabyte, i.e. MB) above which the function counts how many chunks there could be, defaults to 50;
- `binary (bool)` – whether to use binary (i.e. factorized by 1024) representation, defaults to True; if binary=False, use the decimal (or metric) representation (i.e. factorized by $10^{** 3}$)

Returns

number of chunks

Return type

`int | None`

Examples:

```
>>> from pyhelpers.ops import get_number_of_chunks
>>> import os

>>> file_path = "C:\Program Files\Python39\python39.pdb"

>>> os.path.getsize(file_path)
13611008
>>> get_number_of_chunks(file_path, chunk_size_limit=2)
7
```

get_relative_path

`pyhelpers.ops.get_relative_path(pathname)`

Get the relative or absolute path of pathname to the current working directory.

Parameters

`pathname (str / os.PathLike [str])` – pathname (of a file or a directory)

Returns

the relative or absolute path of `path_to_file` to the current working directory

Return type

`str | os.PathLike[str]`

Examples:

```
>>> from pyhelpers.ops import get_relative_path
>>> import os
```

(continues on next page)

(continued from previous page)

```
>>> rel.pathname = get_relative_path(pathname="")
>>> rel.pathname
''

>>> rel.pathname = get_relative_path(pathname=os.path.join(os.getcwd(), "tests"))
>>> rel.pathname
'tests'

>>> # On Windows OS
>>> rel.pathname = get_relative_path(pathname="C:/Windows")
>>> rel.pathname
"C:/Windows"
```

find_executable

`pyhelpers.ops.find_executable(name, options=None, target=None)`

Get pathname of an executable file for a specified application.

Parameters

- **name** (*str*) – name or filename of the application that is to be called
- **options** (*list* / *set* / *None*) – possible pathnames or directories, defaults to *None*
- **target** (*str* / *None*) – specific pathname (that may be known already), defaults to *None*

Returns

whether the specified executable file exists and its pathname

Return type

`tuple[bool, str]`

Examples:

```
>>> from pyhelpers.ops import find_executable
>>> import os

>>> python_exe = "python.exe"
>>> possible_paths = ["C:\Program Files\Python39", "C:\Python39\python.exe"]

>>> python_exe_exists, path_to_python_exe = _check_file_pathname(python_exe, possible_paths)
>>> python_exe_exists
True
>>> os.path.relpath(path_to_python_exe)
'venv\Scripts\python.exe'

>>> text_exe = "pyhelpers.exe" # This file does not actually exist
>>> test_exe_exists, path_to_test_exe = _check_file_pathname(text_exe, possible_paths)
>>> test_exe_exists
False
>>> os.path.relpath(path_to_test_exe)
'pyhelpers.exe'
```

hash_password

```
pyhelpers.ops.hash_password(password, salt=None, salt_size=None, iterations=None, ret_hash=True,
                            **kwargs)
```

Hash a password using `hashlib.pbkdf2_hmac`.

See also [OPS-HP-1].

Parameters

- **password** (`str` / `int` / `float`) – input as a password
- **salt** (`bytes` / `str`) – random data; when `salt=None` (default), it is generated by `os.urandom()`, which depends on `salt_size`; see also [OPS-HP-2]
- **salt_size** (`int` / `None`) – size of the function `os.urandom()`, i.e. the size of a random bytestring for cryptographic use; when `salt_size=None` (default), it uses 128
- **iterations** (`int` / `None`) – size of the function `hashlib.pbkdf2_hmac()`, i.e. number of iterations of SHA-256; when `salt_size=None` (default), it uses 100000
- **ret_hash** (`bool`) – whether to return the salt and key, defaults to `True`
- **kwargs** – [optional] parameters of the function `hashlib.pbkdf2_hmac()`

Returns

(only when `ret_hash=True`) salt and key

Return type

`bytes`

Examples:

```
>>> from pyhelpers.ops import hash_password, verify_password

>>> sk = hash_password('test%123', salt_size=16) # salt and key

>>> salt_data = sk[:16].hex()
>>> key_data = sk[16:].hex()

>>> verify_password('test%123', salt=salt_data, key=key_data)
True
```

verify_password

`pyhelpers.ops.verify_password(password, salt, key, iterations=None)`

Verify a password given salt and key.

Parameters

- **password** (`str` / `int` / `float`) – input as a password
- **salt** (`bytes` / `str`) – random data; see also [OPS-HP-1]
- **key** (`bytes` / `str`) – PKCS#5 password-based key (produced by the function `hashlib.pbkdf2_hmac()`)
- **iterations** (`int` / `None`) – size of the function `hashlib.pbkdf2_hmac()`, i.e. number of iterations of SHA-256; when `salt_size=None` (default), it uses 100000

Returns

whether the input password is correct

Return type

`bool`

See also:

- Examples of the function `pyhelpers.ops.hash_password()`

func_running_time

`pyhelpers.ops.func_running_time(func)`

A decorator to measure the time of a function or class method.

Parameters

`func` (`Callable`) – any function or class method

Returns

the decorated function or class method with the time of running

Return type

`Callable`

Examples:

```
>>> from pyhelpers.ops import func_running_time
>>> import time

>>> @func_running_time
>>> def test_func():
...     print("Testing if the function works.")
...     time.sleep(3)

>>> test_func()
INFO Begin to run function: test_func ...
```

(continues on next page)

(continued from previous page)

Testing if the function works.
INFO Finished running function: test_func, total: 3s

3.3.2 Basic data manipulation

Iterable

<code>loop_in_pairs(iterable)</code>	Get every pair (current, next).
<code>split_list_by_size(lst, sub_len)</code>	Split a list into (evenly sized) sub-lists.
<code>split_list(lst, num_of_sub)</code>	Split a list into a number of equally-sized sub-lists.
<code>split_iterable(iterable, chunk_size)</code>	Split a list into (evenly sized) chunks.
<code>update_dict(dictionary, updates[, inplace])</code>	Update a (nested) dictionary or similar mapping.
<code>update_dict_keys(dictionary[, replacements])</code>	Update keys in a (nested) dictionary.
<code>get_dict_values(key, dictionary)</code>	Get all values in a (nested) dictionary for a given key.
<code>remove_dict_keys(dictionary, *keys)</code>	Remove multiple keys from a dictionary.
<code>compare_dicts(dict1, dict2)</code>	Compare the difference between two dictionaries.
<code>merge_dicts(*dicts)</code>	Merge multiple dictionaries.

loop_in_pairs

`pyhelpers.ops.loop_in_pairs(iterable)`

Get every pair (current, next).

Parameters

`iterable` (*Iterable*) – iterable object

Returns

a `zip`-type variable

Return type

`zip`

Examples:

```
>>> from pyhelpers.ops import loop_in_pairs

>>> res = loop_in_pairs(iterable=[1])
>>> list(res)
[]

>>> res = loop_in_pairs(iterable=range(0, 10))
>>> list(res)
[(0, 1), (1, 2), (2, 3), (3, 4), (4, 5), (5, 6), (6, 7), (7, 8), (8, 9)]
```

split_list_by_size

```
pyhelpers.ops.split_list_by_size(lst, sub_len)
```

Split a list into (evenly sized) sub-lists.

See also [OPS-SLBS-1].

Parameters

- **lst** (*list*) – a list of any
- **sub_len** (*int*) – length of a sub-list

Returns

a sequence of sub_len-sized sub-lists from lst

Return type

Generator[list]

Examples:

```
>>> from pyhelpers.ops import split_list_by_size

>>> lst_ = list(range(0, 10))
>>> lst_
[0, 1, 2, 3, 4, 5, 6, 7, 8, 9]

>>> lists = split_list_by_size(lst_, sub_len=3)
>>> list(lists)
[[0, 1, 2], [3, 4, 5], [6, 7, 8], [9]]
```

split_list

```
pyhelpers.ops.split_list(lst, num_of_sub)
```

Split a list into a number of equally-sized sub-lists.

See also [OPS-SL-1].

Parameters

- **lst** (*list*) – a list of any
- **num_of_sub** (*int*) – number of sub-lists

Returns

a total of num_of_sub sub-lists from lst

Return type

Generator[list]

Examples:

```
>>> from pyhelpers.ops import split_list

>>> lst_ = list(range(0, 10))
>>> lst_
```

(continues on next page)

(continued from previous page)

```
[0, 1, 2, 3, 4, 5, 6, 7, 8, 9]

>>> lists = split_list(lst_, num_of_sub=3)
>>> list(lists)
[[0, 1, 2, 3], [4, 5, 6, 7], [8, 9]]
```

split_iterable

`pyhelpers.ops.split_iterable(iterable, chunk_size)`

Split a list into (evenly sized) chunks.

See also [OPS-SI-1].

Parameters

- `iterable (Iterable)` – iterable object
- `chunk_size (int)` – length of a chunk

Returns

a sequence of equally-sized chunks from `iterable`

Return type

`Generator[Iterable]`

Examples:

```
>>> from pyhelpers.ops import split_iterable
>>> import pandas

>>> iterable_1 = list(range(0, 10))
>>> iterable_1
[0, 1, 2, 3, 4, 5, 6, 7, 8, 9]

>>> iterable_1_ = split_iterable(iterable_1, chunk_size=3)
>>> type(iterable_1_)
generator

>>> for dat in iterable_1_:
...     print(list(dat))
[0, 1, 2]
[3, 4, 5]
[6, 7, 8]
[9]

>>> iterable_2 = pandas.Series(range(0, 20))
>>> iterable_2
0      0
1      1
2      2
3      3
4      4
5      5
6      6
7      7
```

(continues on next page)

(continued from previous page)

```

8     8
9     9
10    10
11    11
12    12
13    13
14    14
15    15
16    16
17    17
18    18
19    19
dtype: int64

>>> iterable_2_ = split_iterable(iterable_2, chunk_size=5)

>>> for dat in iterable_2_:
...     print(list(dat))
[0, 1, 2, 3, 4]
[5, 6, 7, 8, 9]
[10, 11, 12, 13, 14]
[15, 16, 17, 18, 19]

```

update_dict

`pyhelpers.ops.update_dict(dictionary, updates, inplace=False)`

Update a (nested) dictionary or similar mapping.

See also [OPS-UD-1].

Parameters

- **dictionary** (`dict`) – a (nested) dictionary that needs to be updated
- **updates** (`dict`) – a dictionary with new data
- **inplace** (`bool`) – whether to replace the original dictionary with the updated one, defaults to `False`

Returns

an updated dictionary

Return type

`dict`

Examples:

```

>>> from pyhelpers.ops import update_dict

>>> source_dict = {'key_1': 1}
>>> update_data = {'key_2': 2}
>>> upd_dict = update_dict(source_dict, updates=update_data)
>>> upd_dict
{'key_1': 1, 'key_2': 2}
>>> source_dict

```

(continues on next page)

(continued from previous page)

```

{'key_1': 1}
>>> update_dict(source_dict, updates=update_data, inplace=True)
>>> source_dict
{'key_1': 1, 'key_2': 2}

>>> source_dict = {'key': 'val_old'}
>>> update_data = {'key': 'val_new'}
>>> upd_dict = update_dict(source_dict, updates=update_data)
>>> upd_dict
{'key': 'val_new'}

>>> source_dict = {'key': {'k1': 'v1_old', 'k2': 'v2'}}
>>> update_data = {'key': {'k1': 'v1_new'}}
>>> upd_dict = update_dict(source_dict, updates=update_data)
>>> upd_dict
{'key': {'k1': 'v1_new', 'k2': 'v2'}}

>>> source_dict = {'key': {'k1': {}, 'k2': 'v2'}}
>>> update_data = {'key': {'k1': 'v1'}}
>>> upd_dict = update_dict(source_dict, updates=update_data)
>>> upd_dict
{'key': {'k1': 'v1', 'k2': 'v2'}}
```

update_dict_keys

`pyhelpers.ops.update_dict_keys(dictionary, replacements=None)`

Update keys in a (nested) dictionary.

See also [OPS-UDK-1] and [OPS-UDK-2].

Parameters

- **dictionary** (`dict`) – a (nested) dictionary in which certain keys are to be updated
- **replacements** (`dict / None`) – a dictionary in the form of `{<current_key>: <new_key>}`, describing which keys are to be updated, defaults to `None`

Returns

an updated dictionary

Return type

`dict`

Examples:

```
>>> from pyhelpers.ops import update_dict_keys

>>> source_dict = {'a': 1, 'b': 2, 'c': 3}

>>> upd_dict = update_dict_keys(source_dict, replacements=None)
>>> upd_dict # remain unchanged
{'a': 1, 'b': 2, 'c': 3}

>>> repl_keys = {'a': 'd', 'c': 'e'}
>>> upd_dict = update_dict_keys(source_dict, replacements=repl_keys)
>>> upd_dict
{'d': 1, 'b': 2, 'e': 3}

>>> source_dict = {'a': 1, 'b': 2, 'c': {'d': 3, 'e': {'f': 4, 'g': 5}}}

>>> repl_keys = {'d': 3, 'f': 4}
>>> upd_dict = update_dict_keys(source_dict, replacements=repl_keys)
>>> upd_dict
{'a': 1, 'b': 2, 'c': {3: 3, 'e': {4: 4, 'g': 5}}}
```

get_dict_values

`pyhelpers.ops.get_dict_values(key, dictionary)`

Get all values in a (nested) dictionary for a given key.

See also [OPS-GDV-1] and [OPS-GDV-2].

Parameters

- `key (any)` – any that can be the key of a dictionary
- `dictionary (dict)` – a (nested) dictionary

Returns

all values of the key within the given target_dict

Return type

`Generator[Iterable]`

Examples:

```
>>> from pyhelpers.ops import get_dict_values

>>> key_ = 'key'
>>> target_dict_ = {'key': 'val'}
>>> val = get_dict_values(key_, target_dict_)
>>> list(val)
[['val']]

>>> key_ = 'k1'
>>> target_dict_ = {'key': {'k1': 'v1', 'k2': 'v2'}}
>>> val = get_dict_values(key_, target_dict_)
>>> list(val)
[['v1']]

>>> key_ = 'k1'
```

(continues on next page)

(continued from previous page)

```
>>> target_dict_ = {'key': {'k1': ['v1', 'v1_1']}}
>>> val = get_dict_values(key_, target_dict_)
>>> list(val)
[['v1', 'v1_1']]

>>> key_ = 'k2'
>>> target_dict_ = {'key': {'k1': 'v1', 'k2': ['v2', 'v2_1']}}
>>> val = get_dict_values(key_, target_dict_)
>>> list(val)
[['v2', 'v2_1']]
```

remove_dict_keys

`pyhelpers.ops.remove_dict_keys(dictionary, *keys)`

Remove multiple keys from a dictionary.

Parameters

- `dictionary (dict)` – a dictionary
- `keys (any)` – (a sequence of) any that can be the key of a dictionary

Examples:

```
>>> from pyhelpers.ops import remove_dict_keys

>>> target_dict_ = {'k1': 'v1', 'k2': 'v2', 'k3': 'v3', 'k4': 'v4', 'k5': 'v5'}

>>> remove_dict_keys(target_dict_, 'k1', 'k3', 'k4')

>>> target_dict_
{'k2': 'v2', 'k5': 'v5'}
```

compare_dicts

`pyhelpers.ops.compare_dicts(dict1, dict2)`

Compare the difference between two dictionaries.

See also [OPS-CD-1].

Parameters

- `dict1 (dict)` – a dictionary
- `dict2 (dict)` – another dictionary

Returns

in comparison to `dict1`, the main difference on `dict2`, including: modified items, keys that are the same, keys where values remain unchanged, new keys and keys that are removed

Return type

`Tuple[dict, list]`

Examples:

```
>>> from pyhelpers.ops import compare_dicts

>>> d1 = {'a': 1, 'b': 2, 'c': 3}
>>> d2 = {'b': 2, 'c': 4, 'd': [5, 6]}

>>> items_modified, k_shared, k_unchanged, k_new, k_removed = compare_dicts(d1, d2)
>>> items_modified
{'c': [3, 4]}
>>> k_shared
['b', 'c']
>>> k_unchanged
['b']
>>> k_new
['d']
>>> k_removed
['a']
```

merge_dicts

`pyhelpers.ops.merge_dicts(*dicts)`

Merge multiple dictionaries.

Parameters

`dicts (dict) – (one or) multiple dictionaries`

Returns

a single dictionary containing all elements of the input

Return type

`dict`

Examples:

```
>>> from pyhelpers.ops import merge_dicts

>>> dict_a = {'a': 1}
>>> dict_b = {'b': 2}
>>> dict_c = {'c': 3}

>>> merged_dict = merge_dicts(dict_a, dict_b, dict_c)
>>> merged_dict
{'a': 1, 'b': 2, 'c': 3}

>>> dict_c_ = {'c': 4}
>>> merged_dict = merge_dicts(merged_dict, dict_c_)
>>> merged_dict
{'a': 1, 'b': 2, 'c': [3, 4]}

>>> dict_1 = merged_dict
>>> dict_2 = {'b': 2, 'c': 4, 'd': [5, 6]}
>>> merged_dict = merge_dicts(dict_1, dict_2)
>>> merged_dict
{'a': 1, 'b': 2, 'c': [[3, 4], 4], 'd': [5, 6]}
```

Tabular data

<code>detect_nan_for_str_column(data_frame[, ...])</code>	Detect if a str type column contains NaN when reading csv files.
<code>create_rotation_matrix(theta)</code>	Create a rotation matrix (counterclockwise).
<code>dict_to_dataframe(input_dict[, k, v])</code>	Convert a dictionary to a data frame.
<code>parse_csr_matrix(path_to_csr[, verbose])</code>	Load in a compressed sparse row (CSR) or compressed row storage (CRS).
<code>swap_cols(array, c1, c2[, as_list])</code>	Swap positions of two columns in an array.
<code>swap_rows(array, r1, r2[, as_list])</code>	Swap positions of two rows in an array.
<code>np_shift(array, step[, fill_value])</code>	Shift an array by desired number of rows.

`detect_nan_for_str_column`

`pyhelpers.ops.detect_nan_for_str_column(data_frame, column_names=None)`

Detect if a str type column contains NaN when reading csv files.

Parameters

- `data_frame` (`pandas.DataFrame`) – a data frame to be examined
- `column_names` (`None` / `collections.abc.Iterable`) – a sequence of column names, if `None` (default), all columns

Returns

position index of the column that contains NaN

Return type

`Generator[Iterable]`

Examples:

```
>>> from pyhelpers.ops import detect_nan_for_str_column
>>> from pyhelpers._cache import example_dataframe

>>> dat = example_dataframe()
>>> dat
      Easting  Northing
City
London      530034     180381
Birmingham   406689     286822
Manchester    383819     398052
Leeds        582044     152953

>>> dat.loc['Leeds', 'Latitude'] = None
>>> dat
      Easting  Northing
City
London      530034     180381.0
Birmingham   406689     286822.0
Manchester    383819     398052.0
Leeds        582044       NaN
```

(continues on next page)

(continued from previous page)

```
>>> nan_col_pos = detect_nan_for_str_column(data_frame=dat, column_names=None)
>>> list(nan_col_pos)
[1]
```

create_rotation_matrix

`pyhelpers.ops.create_rotation_matrix(theta)`

Create a rotation matrix (counterclockwise).

Parameters

- `theta` (`int` / `float`) – rotation angle (in radian)

Returns

- a rotation matrix of shape (2, 2)

Return type

- `numpy.ndarray`

Examples:

```
>>> from pyhelpers.ops import create_rotation_matrix

>>> rot_mat = create_rotation_matrix(theta=30)
>>> rot_mat
array([[ -0.98803162,   0.15425145],
       [-0.15425145,  -0.98803162]])
```

dict_to_dataframe

`pyhelpers.ops.dict_to_dataframe(input_dict, k='key', v='value')`

Convert a dictionary to a data frame.

Parameters

- `input_dict` (`dict`) – a dictionary to be converted to a data frame
- `k` (`str`) – column name for keys
- `v` (`str`) – column name for values

Returns

- a data frame converted from the `input_dict`

Return type

- `pandas.DataFrame`

Examples:

```
>>> from pyhelpers.ops import dict_to_dataframe

>>> test_dict = {'a': 1, 'b': 2}
```

(continues on next page)

(continued from previous page)

```
>>> dat = dict_to_dataframe(input_dict=test_dict)
>>> dat
   key  value
0    a      1
1    b      2
```

parse_csr_matrix

`pyhelpers.ops.parse_csr_matrix(path_to_csr, verbose=False, **kwargs)`

Load in a compressed sparse row (CSR) or compressed row storage (CRS).

Parameters

- `path_to_csr` (`str` / `os.PathLike`) – path where a CSR file (e.g. with a file extension “`.npz`”) is saved
- `verbose` (`bool` / `int`) – whether to print relevant information in console as the function runs, defaults to `False`
- `kwargs` – [optional] parameters of `numpy.load`

Returns

a compressed sparse row

Return type

`scipy.sparse.csr.csr_matrix`

Examples:

```
>>> from pyhelpers.ops import parse_csr_matrix
>>> from pyhelpers.dirs import cd
>>> from scipy.sparse import csr_matrix, save_npz

>>> data_ = [1, 2, 3, 4, 5, 6]
>>> indices_ = [0, 2, 2, 0, 1, 2]
>>> indptr_ = [0, 2, 3, 6]

>>> csr_m = csr_matrix((data_, indices_, indptr_), shape=(3, 3))
>>> csr_m
<3x3 sparse matrix of type '<class 'numpy.int32'>'>
      with 6 stored elements in Compressed Sparse Row format>

>>> path_to_csr_npz = cd("tests\data", "csr_mat.npz")
>>> save_npz(path_to_csr_npz, csr_m)

>>> parsed_csr_mat = parse_csr_matrix(path_to_csr_npz, verbose=True)
Loading "\tests\data\csr_mat.npz" ... Done.

>>> # .nnz gets the count of explicitly-stored values (non-zeros)
>>> (parsed_csr_mat != csr_m).count_nonzero() == 0
True

>>> (parsed_csr_mat != csr_m).nnz == 0
True
```

swap_cols

```
pyhelpers.ops.swap_cols(array, c1, c2, as_list=False)
```

Swap positions of two columns in an array.

Parameters

- **array** (`numpy.ndarray`) – an array
- **c1** (`int`) – index of a column
- **c2** (`int`) – index of another column
- **as_list** (`bool`) – whether to return a list

Returns

a new array/list in which the positions of the `c1`-th and `c2`-th columns are swapped

Return type

`numpy.ndarray` | list

Examples:

```
>>> from pyhelpers.ops import swap_cols
>>> from pyhelpers._cache import example_dataframe

>>> example_arr = example_dataframe(osgb36=True).to_numpy(dtype=int)
>>> example_arr
array([[530039, 180371],
       [406705, 286868],
       [383830, 398113],
       [430147, 433553]])

>>> # Swap the 0th and 1st columns
>>> new_arr = swap_cols(example_arr, c1=0, c2=1)
>>> new_arr
array([[180371, 530039],
       [286868, 406705],
       [398113, 383830],
       [433553, 430147]])

>>> new_list = swap_cols(example_arr, c1=0, c2=1, as_list=True)
>>> new_list
[[180371, 530039], [286868, 406705], [398113, 383830], [433553, 430147]]
```

swap_rows

```
pyhelpers.ops.swap_rows(array, r1, r2, as_list=False)
```

Swap positions of two rows in an array.

Parameters

- **array** (`numpy.ndarray`) – an array
- **r1** (`int`) – index of a row

- **r2** (*int*) – index of another row
- **as_list** (*bool*) – whether to return a list

Returns

a new array/list in which the positions of the r1-th and r2-th rows are swapped

Return type

`numpy.ndarray` | list

Examples:

```
>>> from pyhelpers.ops import swap_rows
>>> from pyhelpers._cache import example_dataframe

>>> example_arr = example_dataframe(osgb36=True).to_numpy(dtype=int)
>>> example_arr
array([[406705, 286868],
       [530039, 180371],
       [383830, 398113],
       [430147, 433553]])

>>> # Swap the 0th and 1st rows
>>> new_arr = swap_rows(example_arr, r1=0, r2=1)
>>> new_arr
array([[406705, 286868],
       [383830, 398113],
       [530039, 180371],
       [430147, 433553]])

>>> new_list = swap_rows(example_arr, r1=0, r2=1, as_list=True)
>>> new_list
[[406705, 286868], [530039, 180371], [383830, 398113], [430147, 433553]]
```

np_shift

`pyhelpers.ops.np_shift(array, step, fill_value=nan)`

Shift an array by desired number of rows.

See also [OPS-NS-1]

Parameters

- **array** (`numpy.ndarray`) – an array of numbers
- **step** (*int*) – number of rows to shift
- **fill_value** (*float* / *int*) – values to fill missing rows due to the shift, defaults to NaN

Returns

shifted array

Return type

`numpy.ndarray`

Examples:

```
>>> from pyhelpers.ops import np_shift
>>> from pyhelpers._cache import example_dataframe

>>> arr = example_dataframe(osgb36=True).to_numpy()
>>> arr
array([[530039.5588445, 180371.6801655],
       [406705.8870136, 286868.1666422],
       [383830.0390357, 398113.0558309],
       [430147.4473539, 433553.3271173]])

>>> np_shift(arr, step=-1)
array([[406705.8870136, 286868.1666422],
       [383830.0390357, 398113.0558309],
       [430147.4473539, 433553.3271173],
       [nan, nan]])

>>> np_shift(arr, step=1, fill_value=0)
array([[0, 0],
       [530039, 180371],
       [406705, 286868],
       [383830, 398113]])
```

3.3.3 Basic computation

<code>get_extreme_outlier_bounds(num_dat[, k])</code>	Get upper and lower bounds for extreme outliers.
-------------------------------------------------------	--------------------------------------------------

<code>interquartile_range(num_dat)</code>	Calculate interquartile range.
-------------------------------------------	--------------------------------

<code>find_closest_date(date, lookup_dates[, ...])</code>	Find the closest date of a given one from a list of dates.
-----------------------------------------------------------	------------------------------------------------------------

`get_extreme_outlier_bounds`

`pyhelpers.ops.get_extreme_outlier_bounds(num_dat, k=1.5)`

Get upper and lower bounds for extreme outliers.

Parameters

- `num_dat` (*array-like*) – an array of numbers
- `k` (*float, int*) – a scale coefficient associated with interquartile range, defaults to 1.5

Returns

lower and upper bound

Return type

tuple

Examples:

```
>>> from pyhelpers.ops import get_extreme_outlier_bounds
>>> import pandas

>>> data = pandas.DataFrame(range(100), columns=['col'])
>>> data
   col
0     0
1     1
2     2
3     3
4     4
...
95    95
96    96
97    97
98    98
99    99

[100 rows x 1 columns]

>>> data.describe()
   col
count 100.000000
mean 49.500000
std 29.011492
min 0.000000
25% 24.750000
50% 49.500000
75% 74.250000
max 99.000000

>>> lo_bound, up_bound = get_extreme_outlier_bounds(data, k=1.5)
>>> lo_bound, up_bound
(0.0, 148.5)
```

interquartile_range

`pyhelpers.ops.interquartile_range(num_dat)`

Calculate interquartile range.

This function may be an alternative to `scipy.stats.iqr`.

Parameters

`num_dat (numpy.ndarray / list / tuple)` – an array of numbers

Returns

interquartile range of `num_dat`

Return type

float

Examples:

```
>>> from pyhelpers.ops import interquartile_range
```

(continues on next page)

(continued from previous page)

```
>>> data = list(range(100))

>>> iqr_result = interquartile_range(data)
>>> iqr_result
49.5
```

find_closest_date

`pyhelpers.ops.find_closest_date(date, lookup_dates, as_datetime=False, fmt='%Y-%m-%d %H:%M:%S.%f')`

Find the closest date of a given one from a list of dates.

Parameters

- **date** (`str` / `datetime.datetime`) – a date
- **lookup_dates** (`Iterable`) – an array of dates
- **as_datetime** (`bool`) – whether to return a `datetime.datetime`-formatted date, defaults to `False`
- **fmt** (`str`) – datetime format, defaults to '`%Y-%m-%d %H:%M:%S.%f`'

Returns

the date that is closest to the given date

Return type

`str` | `datetime.datetime`

Examples:

```
>>> from pyhelpers.ops import find_closest_date
>>> import pandas

>>> example_dates = pandas.date_range('2019-01-02', '2019-12-31')
>>> example_dates
DatetimeIndex(['2019-01-02', '2019-01-03', '2019-01-04', '2019-01-05',
               '2019-01-06', '2019-01-07', '2019-01-08', '2019-01-09',
               '2019-01-10', '2019-01-11',
               ...
               '2019-12-22', '2019-12-23', '2019-12-24', '2019-12-25',
               '2019-12-26', '2019-12-27', '2019-12-28', '2019-12-29',
               '2019-12-30', '2019-12-31'],
              dtype='datetime64[ns]', length=364, freq='D')

>>> example_date = '2019-01-01'
>>> closest_example_date = find_closest_date(example_date, example_dates)
>>> closest_example_date
'2019-01-02 00:00:00.000000'

>>> example_date = pandas.to_datetime('2019-01-01')
>>> closest_example_date = find_closest_date(example_date, example_dates, as_datetime=True)
>>> closest_example_date
Timestamp('2019-01-02 00:00:00', freq='D')
```

3.3.4 Graph plotting

<code>cmap_discretisation(cmap, n_colours)</code>	Create a discrete colour ramp.
<code>colour_bar_index(cmap, n_colours[, labels])</code>	Create a colour bar.

cmap_discretisation

`pyhelpers.ops.cmap_discretisation(cmap, n_colours)`

Create a discrete colour ramp.

See also [OPS-CD-1].

Parameters

- `cmap` (`matplotlib.colors.ListedColormap` / `matplotlib.colors.LinearSegmentedColormap` / `str`) – a colormap instance, e.g. built-in `colormaps` that is available via `matplotlib.colormaps.get_cmap`
- `n_colours` (`int`) – number of colours

Returns

a discrete colormap from (the continuous) `cmap`

Return type

`matplotlib.colors.LinearSegmentedColormap`

Examples:

```
>>> from pyhelpers.ops import cmap_discretisation
>>> from pyhelpers.settings import mpl_preferences

>>> mpl_preferences(backend='TkAgg', font_name='Times New Roman')

>>> import matplotlib
>>> import matplotlib.pyplot as plt
>>> import numpy as np

>>> cm_accent = cmap_discretisation(cmap=matplotlib.colormaps['Accent'], n_colours=5)
>>> cm_accent.name
'Accent_5'
>>> cm_accent = cmap_discretisation(cmap='Accent', n_colours=5)
>>> cm_accent.name
'Accent_5'

>>> fig = plt.figure(figsize=(10, 2), constrained_layout=True)
>>> ax = fig.add_subplot()

>>> ax.imshow(np.resize(range(100), (5, 100)), cmap=cm_accent, interpolation='nearest')

>>> plt.axis('off')
>>> plt.show()
```

The example is illustrated in Fig. 3:



Fig. 3: An example of discrete colour ramp, created by the function `cmap_discretisation()`.

```
>>> plt.close()
```

colour_bar_index

`pyhelpers.ops.colour_bar_index(cmap, n_colours, labels=None, **kwargs)`

Create a colour bar.

To stop making off-by-one errors. Takes a standard colour ramp, and discretizes it, then draws a colour bar with correctly aligned labels.

See also [OPS-CBI-1].

Parameters

- `cmap` (`matplotlib.colors.ListedColormap`) – a colormap instance, e.g. built-in `colormaps` that is accessible via `matplotlib.cm.get_cmap`
- `n_colours` (`int`) – number of colours
- `labels` (`list` / `None`) – a list of labels for the colour bar, defaults to `None`
- `kwargs` – [optional] parameters of `matplotlib.pyplot.colorbar`

Returns

a colour bar object

Return type

`matplotlib.colorbar.Colorbar`

Examples:

```
>>> from pyhelpers.ops import colour_bar_index
>>> from pyhelpers.settings import mpl_preferences

>>> mpl_preferences(backend='TkAgg', font_name='Times New Roman')

>>> import matplotlib
>>> import matplotlib.pyplot as plt

>>> fig = plt.figure(figsize=(2, 6), constrained_layout=True)
>>> ax = fig.add_subplot()

>>> cbar = colour_bar_index(cmap=matplotlib.colormaps['Accent'], n_colours=5)

>>> ax.tick_params(axis='both', which='major', labelsize=14)
>>> cbar.ax.tick_params(labelsize=14)
```

(continues on next page)

(continued from previous page)

```
>>> # ax.axis('off')
>>> plt.show()
```

The above example is illustrated in Fig. 4:

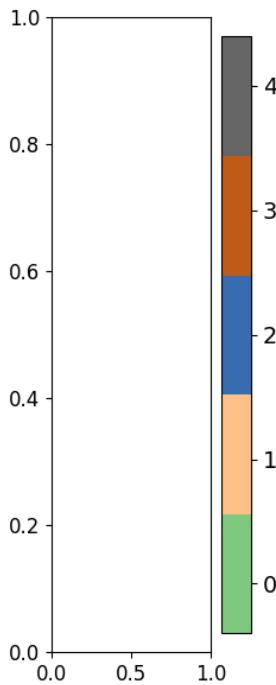


Fig. 4: An example of colour bar with numerical index, created by the function `colour_bar_index()`.

```
>>> fig = plt.figure(figsize=(2, 6), constrained_layout=True)
>>> ax = fig.add_subplot()

>>> labels_ = list('abcde')
>>> cbar = colour_bar_index(matplotlib.colormaps['Accent'], n_colours=5, labels=labels_)

>>> ax.tick_params(axis='both', which='major', labelsize=14)
>>> cbar.ax.tick_params(labelsize=14)

>>> # ax.axis('off')
>>> plt.show()
```

This second example is illustrated in Fig. 5:

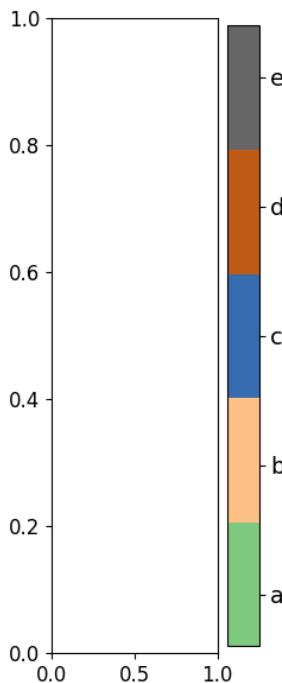


Fig. 5: An example of colour bar with textual index, created by the function `colour_bar_index()`.

```
>>> plt.close(fig='all')
```

3.3.5 Web data extraction

<code>is_network_connected()</code>	Check whether the current machine can connect to the Internet.
<code>is_url(url[, partially])</code>	Check whether <code>url</code> is a valid URL.
<code>is_url_connectable(url)</code>	Check whether the current machine can connect to a given URL.
<code>is_downloadable(url[, request_field])</code>	Check whether a URL leads to a web page where there is downloadable contents.
<code>init_requests_session(url[, max_retries, ...])</code>	Instantiate a <code>requests</code> session.
<code>load_user_agent_strings([shuffled, ...])</code>	Load user-agent strings of popular browsers.
<code>get_user_agent_string([fancy])</code>	Get a random user-agent string of a certain browser.
<code>fake_requests_headers([randomized])</code>	Make a fake HTTP headers for <code>requests.get</code> .
<code>download_file_from_url(url, path_to_file[, ...])</code>	Download an object available at a valid URL.

is_network_connected

`pyhelpers.ops.is_network_connected()`

Check whether the current machine can connect to the Internet.

Returns

whether the Internet connection is currently working

Return type

`bool`

Examples:

```
>>> from pyhelpers.ops import is_network_connected
>>> is_network_connected() # assuming the machine is currently connected to the Internet
True
```

is_url

`pyhelpers.ops.is_url(url, partially=False)`

Check whether url is a valid URL.

See also [OPS-IU-1]

Parameters

- `url (str)` – a string-type variable
- `partially (bool)` – whether to consider the input as partially valid, defaults to `False`

Returns

whether url is a valid URL

Return type

`bool`

Examples:

```
>>> from pyhelpers.ops import is_url
>>> is_url(url='https://github.com/mikeqfu/pyhelpers')
True

>>> is_url(url='github.com/mikeqfu/pyhelpers')
False

>>> is_url(url='github.com/mikeqfu/pyhelpers', partially=True)
True

>>> is_url(url='github.com')
False

>>> is_url(url='github.com', partially=True)
```

(continues on next page)

(continued from previous page)

```
True

>>> is_url(url='github', partially=True)
False
```

is_url_connectable

```
pyhelpers.ops.is_url_connectable(url)
```

Check whether the current machine can connect to a given URL.

Parameters

`url (str)` – a (valid) URL

Returns

whether the machine can currently connect to the given URL

Return type

`bool`

Examples:

```
>>> from pyhelpers.ops import is_url_connectable

>>> url_0 = 'https://www.python.org/'
>>> is_url_connectable(url_0)
True

>>> url_1 = 'https://www.python.org1'
>>> is_url_connectable(url_1)
False
```

is_downloadable

```
pyhelpers.ops.is_downloadable(url, request_field='content-type', **kwargs)
```

Check whether a URL leads to a web page where there is downloadable contents.

Parameters

- `url (str)` – a valid URL
- `request_field (str)` – name of the field/header indicating the original media type of the resource, defaults to 'content-type'
- `kwargs` – [optional] parameters of `requests.head`

Returns

whether the url leads to downloadable contents

Return type

`bool`

Examples:

```
>>> from pyhelpers.ops import is_downloadable

>>> logo_url = 'https://www.python.org/static/community_logos/python-logo-master-v3-TM.png'
>>> is_downloadable(logo_url)
True

>>> google_url = 'https://www.google.co.uk/'
>>> is_downloadable(google_url)
False
```

init_requests_session

`pyhelpers.ops.init_requests_session(url, max_retries=5, backoff_factor=0.1, retry_status='default', **kwargs)`

Instantiate a `requests` session.

Parameters

- `url (str)` – a valid URL
- `max_retries (int)` – maximum number of retries, defaults to 5
- `backoff_factor (float)` – backoff_factor of `urllib3.util.Retry`, defaults to 0.1
- `retry_status` – a list of HTTP status codes that force to retry downloading, inherited from `status_forcelist` of `urllib3.util.Retry`; when `retry_status='default'`, the list defaults to [429, 500, 502, 503, 504]
- `kwargs` – [optional] parameters of `urllib3.util.Retry`

Returns

a `requests` session

Return type

`requests.Session`

Examples:

```
>>> from pyhelpers.ops import init_requests_session

>>> logo_url = 'https://www.python.org/static/community_logos/python-logo-master-v3-TM.png'

>>> s = init_requests_session(logo_url)

>>> type(s)
requests.sessions.Session
```

load_user_agent_strings

```
pyhelpers.ops.load_user_agent_strings(shuffled=False, flattened=False, update=False,
                                      verbose=False)
```

Load user-agent strings of popular browsers.

The current version collects a partially comprehensive list of user-agent strings for [Chrome](#), [Firefox](#), [Safari](#), [Edge](#), [Internet Explorer](#) and [Opera](#).

Parameters

- **shuffled** (*bool*) – whether to randomly shuffle the user-agent strings, defaults to False
- **flattened** (*bool*) – whether to make a list of all available user-agent strings, defaults to False
- **update** (*bool*) – whether to update the backup data of user-agent strings, defaults to False
- **verbose** (*bool* / *int*) – whether to print relevant information in console, defaults to False

Returns

a dictionary of user agent strings for popular browsers

Return type

dict | *list*

Examples:

```
>>> from pyhelpers.ops import load_user_agent_strings

>>> uas = load_user_agent_strings()

>>> list(uas.keys())
['Chrome', 'Firefox', 'Safari', 'Edge', 'Internet Explorer', 'Opera']

>>> type(uas['Chrome'])
list

>>> uas['Chrome'][0]
'Mozilla/5.0 (Windows NT 10.0; Win64; x64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/...

>>> uas_list = load_user_agent_strings(shuffled=True, flattened=True)
>>> type(uas_list)
list

>>> uas_list[0] # a random one
'Mozilla/5.0 (Windows NT 6.0) AppleWebKit/535.1 (KHTML, like Gecko) Chrome/14.0.792.0 Saf...
```

Note: The order of the elements in *uas_list* may be different every time we run the example as *shuffled=True*.

get_user_agent_string

`pyhelpers.ops.get_user_agent_string(fancy=None, **kwargs)`

Get a random user-agent string of a certain browser.

Parameters

- **fancy** – name of a preferred browser, defaults to None; options include 'Chrome', 'Firefox', 'Safari', 'Edge', 'Internet Explorer' and 'Opera'; if fancy=None, the function returns a user-agent string of a randomly-selected browser among all the available options
- **kwargs** – [optional] parameters of the function
`pyhelpers.ops.get_user_agent_strings()`

Type

`fancy: None | str`

Returns

a user-agent string of a certain browser

Return type

`str`

Examples:

```
>>> from pyhelpers.ops import get_user_agent_string

>>> # Get a random user-agent string
>>> uas_0 = get_user_agent_string()
>>> uas_0
'Opera/7.01 (Windows 98; U) [en]'

>>> # Get a random Chrome user-agent string
>>> uas_1 = get_user_agent_string(fancy='Chrome')
>>> uas_1
'Mozilla/5.0 (Windows NT 6.0; WOW64) AppleWebKit/535.11 (KHTML, like Gecko) Chrome/17.0.9...'
```

Note: In the above examples, the returned user-agent string is random and may be different every time of running the function.

fake_requests_headers

`pyhelpers.ops.fake_requests_headers(randomized=True, **kwargs)`

Make a fake HTTP headers for `requests.get`.

Parameters

- **randomized (bool)** – whether to use a user-agent string randomly selected from among all available data of several popular browsers, defaults to True; if randomized=False, the function uses a random Chrome user-agent string

- **kwargs** – [optional] parameters of the function
`pyhelpers.ops.get_user_agent_string()`

Returns

fake HTTP headers

Return type

dict

Examples:

```
>>> from pyhelpers.ops import fake_requests_headers

>>> fake_headers_1 = fake_requests_headers()
>>> fake_headers_1
{'user-agent': 'Mozilla/5.0 (Windows; U; Windows NT 5.1; it-IT) AppleWebKit/525.19 (KHTML...'

>>> fake_headers_2 = fake_requests_headers(randomized=False)
>>> fake_headers_2 # using a random Chrome user-agent string
{'user-agent': 'Mozilla/5.0 (Windows; U; Windows NT 6.1; en-US) AppleWebKit/532.1 (KHTML,...'}
```

Note:

- `fake_headers_1` may also be different every time we run the example. This is because the returned result is randomly chosen from a limited set of candidate user-agent strings, even though `randomized` is (by default) set to be `False`.
- By setting `randomized=True`, the function returns a random result from among all available user-agent strings of several popular browsers.

download_file_from_url

```
pyhelpers.ops.download_file_from_url(url, path_to_file, if_exists='replace', max_retries=5,
                                      random_header=True, verbose=False,
                                      requests_session_args=None, fake_headers_args=None,
                                      **kwargs)
```

Download an object available at a valid URL.

See also [OPS-DFFU-1] and [OPS-DFFU-2].

Parameters

- **url** (`str`) – valid URL to a web resource
- **path_to_file** (`str` / `os.PathLike` [`str`]) – a path where the downloaded object is saved as, or a filename
- **if_exists** (`str`) – given that the specified file already exists, options include '`replace`' (default, continuing to download the requested file and replace the existing one at the specified path) and '`pass`' (cancelling the download)
- **max_retries** (`int`) – maximum number of retries, defaults to 5

- **random_header** (bool) – whether to go for a random agent, defaults to True
- **verbose** (bool / int) – whether to print relevant information in console, defaults to False
- **requests_session_args** (dict / None) – [optional] parameters of the function `pyhelpers.ops.init_requests_session()`, defaults to None
- **fake_headers_args** (dict / None) – [optional] parameters of the function `pyhelpers.ops.fake_requests_headers()`, defaults to None
- **kwags** – [optional] parameters of `requests.Session.get()`

Examples:

```
>>> from pyhelpers.ops import download_file_from_url
>>> from pyhelpers.dirs import cd
>>> from PIL import Image
>>> import os

>>> logo_url = 'https://www.python.org/static/community_logos/python-logo-master-v3-TM.png'
>>> path_to_img = cd("tests\images", "ops-download_file_from_url-demo.png")

>>> # Check if "python-logo.png" exists at the specified path
>>> os.path.exists(path_to_img)
False

>>> # Download the .png file
>>> download_file_from_url(logo_url, path_to_img)

>>> # If download is successful, check again:
>>> os.path.exists(path_to_img)
True

>>> img = Image.open(path_to_img)
>>> img.show() # as illustrated below
```



Fig. 6: The Python Logo.

Note:

- When `verbose=True`, the function requires `tqdm`.

<code>GitHubFileDownloader(repo_url[, ...])</code>	Download files on GitHub from a given repository URL.
----------------------------------------------------	-------------------------------------------------------

GitHubFileDownloader

```
class pyhelpers.ops.GitHubFileDownloader(repo_url, flatten_files=False, output_dir=None)
    Download files on GitHub from a given repository URL.
```

Parameters

- `repo_url (str)` – URL of a GitHub repository to download from; it can be a blob or tree path
- `flatten_files (bool)` – whether to pull the contents of all subdirectories into the root folder, defaults to False
- `output_dir (str / None)` – output directory where the downloaded files will be saved, when `output_dir=None`, it defaults to None

Variables

- `repo_url (str)` – URL of a GitHub repository to download from
- `flatten (bool)` – whether to pull the contents of all subdirectories into the root folder, defaults to False
- `output_dir (str / None)` – defaults to None
- `api_url (str)` – URL of a GitHub repository (compatible with GitHub's REST API)
- `download_path (str)` – pathname for downloading files
- `total_files (int)` – total number of files under the given directory

Examples:

```
>>> from pyhelpers.ops import GitHubFileDownloader

>>> test_output_dir = "tests/temp"

>>> # Download a single file
>>> test_url = "https://github.com/mikeqfu/pyhelpers/blob/master/tests/data/dat.csv"
>>> downloader = GitHubFileDownloader(repo_url=test_url, output_dir=test_output_dir)
>>> downloader.download()
Downloaded to: tests/temp/tests/data/dat.csv
1

>>> # Download a directory
>>> test_url = "https://github.com/mikeqfu/pyhelpers/blob/master/tests/data"
>>> downloader = GitHubFileDownloader(repo_url=test_url, output_dir=test_output_dir)
>>> downloader.download()
Downloaded to: tests/temp/tests/data/csr_mat.npz
Downloaded to: tests/temp/tests/data/dat.csv
Downloaded to: tests/temp/tests/data/dat.feather
```

(continues on next page)

(continued from previous page)

```

Downloaded to: tests/temp/tests/data/dat.joblib
Downloaded to: tests/temp/tests/data/dat.json
Downloaded to: tests/temp/tests/data/dat.pickle
Downloaded to: tests/temp/tests/data/dat.txt
Downloaded to: tests/temp/tests/data/dat.xlsx
Downloaded to: tests/temp/tests/data/zipped.7z
Downloaded to: tests/temp/tests/data/zipped.txt
Downloaded to: tests/temp/tests/data/zipped.zip
Downloaded to: tests/temp/tests/data/zipped/zipped.txt
12

>>> downloader = GitHubFileDownloader(
...     repo_url=test_url, flatten_files=True, output_dir=test_output_dir)
>>> downloader.download()
Downloaded to: tests/temp/csr_mat.npz
Downloaded to: tests/temp/dat.csv
Downloaded to: tests/temp/dat.feather
Downloaded to: tests/temp/dat.joblib
Downloaded to: tests/temp/dat.json
Downloaded to: tests/temp/dat.pickle
Downloaded to: tests/temp/dat.txt
Downloaded to: tests/temp/dat.xlsx
Downloaded to: tests/temp/zipped.7z
Downloaded to: tests/temp/zipped.txt
Downloaded to: tests/temp/zipped.zip
Downloaded to: tests/temp/zipped.txt
12

```

Methods

<code>create_url(url)</code>	From the given url, produce a URL that is compatible with GitHub's REST API.
<code>download([api_url])</code>	Download a file or a directory for the given api_url.
<code>download_single_file(file_url, dir_out)</code>	Download a single file.

GitHubFileDownloader.create_url

```
static GitHubFileDownloader.create_url(url)
```

From the given url, produce a URL that is compatible with GitHub's REST API.

It can handle blob or tree paths.

Parameters

`url (str) – URL`

Returns

URL of a GitHub repository and pathname for downloading file

Return type

`tuple`

Examples:

```
>>> from pyhelpers.ops import GitHubFileDownloader

>>> test_output_dir = "tests/temp"

>>> test_url = "https://github.com/mikeqfu/pyhelpers/blob/master/tests/data/dat.csv"
>>> downloader = GitHubFileDownloader(test_url, output_dir=test_output_dir)
>>> test_api_url, test_download_path = downloader.create_url(test_url)
>>> test_api_url
'https://api.github.com/repos/mikeqfu/pyhelpers/contents/tests/data/dat.csv?ref=master'
>>> test_download_path
'tests/data/dat.csv'

>>> test_url = "https://github.com/xyluo25/openNetwork/blob/main/docs"
>>> downloader = GitHubFileDownloader(test_url, output_dir=test_output_dir)
>>> test_api_url, test_download_path = downloader.create_url(test_url)
>>> test_api_url
'https://api.github.com/repos/xyluo25/openNetwork/contents/docs?ref=main'
>>> test_download_path
'docs'
```

GitHubFileDownloader.download`GitHubFileDownloader.download(api_url=None)`

Download a file or a directory for the given api_url.

Parameters

`api_url (str / None)` – defaults to None

Returns

total number of files under the given directory

Return type

int

See also:

- Examples for the method `GitHubFileDownloader.download()`.

GitHubFileDownloader.download_single_file`GitHubFileDownloader.download_single_file(file_url, dir_out)`

Download a single file.

Parameters

- `file_url (str)` – URL of a single file
- `dir_out (str)` – pathname for saving the file

See also:

- Examples for the method `GitHubFileDownloader.download()`.

3.4 store

Saving, loading and other relevant operations of file-like objects.

3.4.1 Data saving

<code>save_pickle(data, path_to_file[, verbose])</code>	Save data to a Pickle file.
<code>save_spreadsheet(data, path_to_file[, ...])</code>	Save data to a CSV , an Microsoft Excel, or an OpenDocument format file.
<code>save_spreadsheets(data, path_to_file, ...[, ...])</code>	Save data to a multi-sheet Microsoft Excel or OpenDocument format file.
<code>save_json(data, path_to_file[, engine, verbose])</code>	Save data to a JSON file.
<code>save_joblib(data, path_to_file[, verbose])</code>	Save data to a Joblib file.
<code>save_feather(data, path_to_file[, index, ...])</code>	Save a dataframe to a Feather file.
<code>save_svg_as_emf(path_to_svg, path_to_emf[, ...])</code>	Save a SVG file (.svg) as a EMF file (.emf).
<code>save_fig(path_to_file[, dpi, verbose, ...])</code>	Save a figure object to a file of a supported file format.
<code>save_web_page_as_pdf(web_page, path_to_pdf)</code>	Save a web page as a PDF file by wkhtmltopdf .
<code>save_data(data, path_to_file[, err_warning, ...])</code>	Save data to a file of a specific format.

save_pickle

`pyhelpers.store.save_pickle(data, path_to_file, verbose=False, **kwargs)`

Save data to a [Pickle](#) file.

Parameters

- **data** (*any*) – data that could be dumped by the built-in module [pickle.dump](#)
- **path_to_file** (*str* / *os.PathLike*) – path where a pickle file is saved
- **verbose** (*bool* / *int*) – whether to print relevant information in console, defaults to False
- **kwargs** – [optional] parameters of [pickle.dump](#)

Examples:

```
>>> from pyhelpers.store import save_pickle
>>> from pyhelpers.dirs import cd
>>> from pyhelpers._cache import example_dataframe

>>> pickle_dat = 1

>>> pickle_pathname = cd("tests\data", "dat.pickle")
>>> save_pickle(pickle_dat, pickle_pathname, verbose=True)
```

(continues on next page)

(continued from previous page)

```
Saving "dat.pickle" to "tests\data\" ... Done.
```

```
>>> # Get an example dataframe
>>> pickle_dat = example_dataframe()
>>> pickle_dat
   Longitude  Latitude
City
London      -0.127647  51.507322
Birmingham  -1.902691  52.479699
Manchester  -2.245115  53.479489
Leeds        -1.543794  53.797418

>>> save_pickle(pickle_dat, pickle_pathname, verbose=True)
Updating "dat.pickle" at "tests\data\" ... Done.
```

See also:

- Examples for the function `pyhelpers.store.load_pickle()`.

`save_spreadsheet`

```
pyhelpers.store.save_spreadsheet(data, path_to_file, index=False, engine=None, delimiter=',',
                                 verbose=False, **kwargs)
```

Save data to a [CSV](#), an [Microsoft Excel](#), or an [OpenDocument](#) format file.

The file extension can be `".txt"`, `".csv"`, `".xlsx"`, or `".xls"`; and engines may rely on `xlsxwriter`, `openpyxl`, or `odfpy`.

Parameters

- `data` (`pandas.DataFrame`) – data that could be saved as a spreadsheet (e.g. with a file extension `".xlsx"` or `".csv"`)
- `path_to_file` (`str` / `os.PathLike` / `None`) – path where a spreadsheet is saved
- `index` (`bool`) – whether to include the index as a column, defaults to `False`
- `engine` (`str` / `None`) – options include `'openpyxl'` and `'xlsxwriter'` for Excel file formats such as `".xlsx"` (or `".xls"`), and `'odf'` for OpenDocument file format such as `".ods"`, defaults to `None`
- `delimiter` (`str`) – separator for saving data as a `".csv"`, `".txt"`, or `".odt"` file, defaults to `', '`
- `verbose` (`bool` / `int`) – whether to print relevant information in console, defaults to `False`
- `kwargs` – [optional] parameters of `pandas.DataFrame.to_excel` or `pandas.DataFrame.to_csv`

Examples:

```
>>> from pyhelpers.store import save_spreadsheet
>>> from pyhelpers.dirs import cd
>>> from pyhelpers._cache import example_dataframe

>>> # Get an example dataframe
>>> spreadsheet_dat = example_dataframe()
>>> spreadsheet_dat
   Longitude Latitude
City
London      -0.127647  51.507322
Birmingham  -1.902691  52.479699
Manchester  -2.245115  53.479489
Leeds        -1.543794  53.797418

>>> spreadsheet.pathname = cd("tests\data", "dat.csv")
>>> save_spreadsheet(spreadsheet_dat, spreadsheet.pathname, index=True, verbose=True)
Saving "dat.csv" to "tests\data\" ... Done.

>>> spreadsheet.pathname = cd("tests\data", "dat.xlsx")
>>> save_spreadsheet(spreadsheet_dat, spreadsheet.pathname, index=True, verbose=True)
Saving "dat.xlsx" to "tests\data\" ... Done.

>>> spreadsheet.pathname = cd("tests\data", "dat.ods")
>>> save_spreadsheet(spreadsheet_dat, spreadsheet.pathname, index=True, verbose=True)
Saving "dat.ods" to "tests\data\" ... Done.
```

save_spreadsheets

`pyhelpers.store.save_spreadsheets(data, path_to_file, sheet_names, mode='w', if_sheet_exists=None, verbose=False, **kwargs)`

Save data to a multi-sheet Microsoft Excel or OpenDocument format file.

The file extension can be “.xlsx” (or “.xls”) or “.ods”.

Parameters

- **data** (`list` / `tuple` / `iterable`) – a sequence of `pandas.DataFrame`
- **path_to_file** (`str` / `os.PathLike`) – path where a spreadsheet is saved
- **sheet_names** (`list` / `tuple` / `iterable`) – all sheet names of an Excel workbook
- **mode** (`str`) – mode to write to an Excel file; ‘`w`’ (default) for ‘write’ and ‘`a`’ for ‘append’; note that the ‘append’ mode is not supported with OpenDocument
- **if_sheet_exists** (`None` / `str`) – indicate the behaviour when trying to write to an existing sheet; see also the parameter `if_sheet_exists` of `pandas.ExcelWriter`
- **verbose** (`bool` / `int`) – whether to print relevant information in console, defaults to `False`
- **kwargs** – [optional] parameters of `pandas.DataFrame.to_excel`

Examples:

```
>>> from pyhelpers.store import save_spreadsheets
>>> from pyhelpers.dirs import cd
>>> from pyhelpers._cache import example_dataframe

>>> dat1 = example_dataframe() # Get an example dataframe
>>> dat1
      Longitude   Latitude
City
London      -0.127647  51.507322
Birmingham -1.902691  52.479699
Manchester -2.245115  53.479489
Leeds       -1.543794  53.797418

>>> dat2 = dat1.T
>>> dat2
      City      London  Birmingham  Manchester    Leeds
Longitude -0.127647  -1.902691  -2.245115 -1.543794
Latitude   51.507322  52.479699  53.479489  53.797418

>>> dat = [dat1, dat2]
>>> sheets = ['TestSheet1', 'TestSheet2']

>>> pathname = cd("tests\data", "dat.ods")
>>> save_spreadsheets(dat, pathname, sheets, verbose=True)
Saving "dat.ods" to "tests\data\" ...
'TestSheet1' ... Done.
'TestSheet2' ... Done.

>>> pathname = cd("tests\data", "dat.xlsx")
>>> save_spreadsheets(dat, pathname, sheets, verbose=True)
Saving "dat.xlsx" to "tests\data\" ...
'TestSheet1' ... Done.
'TestSheet2' ... Done.

>>> save_spreadsheets(dat, pathname, sheets, mode='a', verbose=True)
Updating "dat.xlsx" at "tests\data\" ...
'TestSheet1' ... This sheet already exists; [pass]|new|replace: new
           saved as 'TestSheet11' ... Done.
'TestSheet2' ... This sheet already exists; [pass]|new|replace: new
           saved as 'TestSheet21' ... Done.

>>> save_spreadsheets(dat, pathname, sheets, 'a', if_sheet_exists='replace', verbose=True)
Updating "dat.xlsx" at "tests\data\" ...
'TestSheet1' ... Done.
'TestSheet2' ... Done.

>>> save_spreadsheets(dat, pathname, sheets, 'a', if_sheet_exists='new', verbose=True)
Updating "dat.xlsx" at "tests\data\" ...
'TestSheet1' ... saved as 'TestSheet12' ... Done.
'TestSheet2' ... saved as 'TestSheet22' ... Done.
```

save_json

```
pyhelpers.store.save_json(data, path_to_file, engine=None, verbose=False, **kwargs)
```

Save data to a **JSON** file.

Parameters

- **data** (*any json data*) – data that could be dumped by as a JSON file
- **path_to_file** (*str / os.PathLike*) – path where a json file is saved
- **engine** (*str / None*) – an open-source module used for JSON serialization, options include `None` (default, for the built-in `json module`), '`ujson`' (for `UltraJSON`), '`orjson`' (for `orjson`) and '`rapidjson`' (for `python-rapidjson`)
- **verbose** (*bool / int*) – whether to print relevant information in console, defaults to `False`
- **kwargs** – [optional] parameters of `json.dump()` (if `engine=None`), `orjson.dumps()` (if `engine='orjson'`), `ujson.dump()` (if `engine='ujson'`) or `rapidjson.dump()` (if `engine='rapidjson'`)

Examples:

```
>>> from pyhelpers.store import save_json
>>> from pyhelpers.dirs import cd
>>> from pyhelpers._cache import example_dataframe
>>> import json

>>> json_pathname = cd("tests\data", "dat.json")

>>> json_dat = {'a': 1, 'b': 2, 'c': 3, 'd': ['a', 'b', 'c']}
>>> save_json(json_dat, json_pathname, indent=4, verbose=True)
Saving "dat.json" to "tests\data\" ... Done.

>>> # Get an example dataframe
>>> example_df = example_dataframe()
>>> example_df
   Longitude    Latitude
City
London      -0.127647  51.507322
Birmingham  -1.902691  52.479699
Manchester   -2.245115  53.479489
Leeds        -1.543794  53.797418

>>> # Convert the dataframe to JSON format
>>> json_dat = json.loads(example_df.to_json(orient='index'))
>>> json_dat
{'London': {'Longitude': -0.1276474, 'Latitude': 51.5073219},
 'Birmingham': {'Longitude': -1.9026911, 'Latitude': 52.4796992},
 'Manchester': {'Longitude': -2.2451148, 'Latitude': 53.4794892},
 'Leeds': {'Longitude': -1.5437941, 'Latitude': 53.7974185}}

>>> # Use built-in json module
>>> save_json(json_dat, json_pathname, indent=4, verbose=True)
Updating "dat.json" at "tests\data\" ... Done.
```

(continues on next page)

(continued from previous page)

```
>>> save_json(json_dat, json_pathname, engine='orjson', verbose=True)
Updating "dat.json" at "tests\data\" ... Done.

>>> save_json(json_dat, json_pathname, engine='ujson', indent=4, verbose=True)
Updating "dat.json" at "tests\data\" ... Done.

>>> save_json(json_dat, json_pathname, engine='rapidjson', indent=4, verbose=True)
Updating "dat.json" at "tests\data\" ... Done.
```

See also:

- Examples for the function `pyhelpers.store.load_json()`.

save_joblib

`pyhelpers.store.save_joblib(data, path_to_file, verbose=False, **kwargs)`

Save data to a **Joblib** file.

Parameters

- **data** (*any*) – data that could be dumped by `joblib.dump`
- **path_to_file** (*str* / *os.PathLike*) – path where a pickle file is saved
- **verbose** (*bool* / *int*) – whether to print relevant information in console, defaults to False
- **kwargs** – [optional] parameters of `joblib.dump`

Examples:

```
>>> from pyhelpers.store import save_joblib
>>> from pyhelpers.dirs import cd
>>> from pyhelpers._cache import example_dataframe
>>> import numpy as np

>>> joblib_pathname = cd("tests\data", "dat.joblib")

>>> # Example 1:
>>> joblib_dat = example_dataframe().to_numpy()
>>> joblib_dat
array([[[-0.1276474, 51.5073219],
       [-1.9026911, 52.4796992],
       [-2.2451148, 53.4794892],
       [-1.5437941, 53.7974185]])

>>> save_joblib(joblib_dat, joblib_pathname, verbose=True)
Saving "dat.joblib" to "tests\data\" ... Done.

>>> # Example 2:
>>> np.random.seed(0)
>>> joblib_dat = np.random.rand(100, 100)
>>> joblib_dat
array([[0.5488135, 0.71518937, 0.60276338, ..., 0.02010755, 0.82894003,
       0.00469548],
```

(continues on next page)

(continued from previous page)

```
[0.67781654, 0.27000797, 0.73519402, ..., 0.25435648, 0.05802916,
 0.43441663],
[0.31179588, 0.69634349, 0.37775184, ..., 0.86219152, 0.97291949,
 0.96083466],
...,
[0.89111234, 0.26867428, 0.84028499, ..., 0.5736796 , 0.73729114,
 0.22519844],
[0.26969792, 0.73882539, 0.80714479, ..., 0.94836806, 0.88130699,
 0.1419334 ],
[0.88498232, 0.19701397, 0.56861333, ..., 0.75842952, 0.02378743,
 0.81357508]])

>>> save_joblib(joblib_dat, joblib_pathname, verbose=True)
Updating "dat.joblib" at "tests\data\" ... Done.
```

See also:

- Examples for the function `pyhelpers.store.load_joblib()`.

save_feather

`pyhelpers.store.save_feather(data, path_to_file, index=False, verbose=False, **kwargs)`

Save a dataframe to a `Feather` file.

Parameters

- `data (pandas.DataFrame)` – a dataframe to be saved as a feather-formatted file
- `path_to_file (str / os.PathLike)` – path where a feather file is saved
- `index (bool)` – whether to include the index as a column, defaults to False
- `verbose (bool / int)` – whether to print relevant information in console, defaults to False
- `kwargs` – [optional] parameters of `pandas.DataFrame.to_feather`

Examples:

```
>>> from pyhelpers.store import save_feather
>>> from pyhelpers.dirs import cd
>>> from pyhelpers._cache import example_dataframe

>>> feather_dat = example_dataframe() # Get an example dataframe
>>> feather_dat
   Longitude    Latitude
City
London      -0.127647  51.507322
Birmingham  -1.902691  52.479699
Manchester  -2.245115  53.479489
Leeds        -1.543794  53.797418

>>> feather_pathname = cd("tests\data", "dat.feather")
```

(continues on next page)

(continued from previous page)

```
>>> save_feather(feather_dat, feather_pathname, verbose=True)
Saving "dat.feather" to "tests\data\" ... Done.

>>> save_feather(feather_dat, feather_pathname, index=True, verbose=True)
Updating "dat.feather" at "tests\data\" ... Done.
```

See also:

- Examples for the function `pyhelpers.store.load_feather()`.

save_svg_as_emf

`pyhelpers.store.save_svg_as_emf(path_to_svg, path_to_emf, verbose=False, inkscape_exe=None, **kwargs)`

Save a **SVG** file (.svg) as a **EMF** file (.emf).

Parameters

- `path_to_svg (str)` – path where a .svg file is saved
- `path_to_emf (str)` – path where a .emf file is saved
- `verbose (bool / int)` – whether to print relevant information in console, defaults to False
- `inkscape_exe (str / None)` – absolute path to ‘inkscape.exe’, defaults to None; when `inkscape_exe=None`, use the default installation path, e.g. (on Windows) “`C:\Program Files\Inkscape\bin\inkscape.exe`” or “`C:\Program Files\Inkscape\inkscape.exe`”
- `kwargs` – [optional] parameters of `subprocess.run`

Examples:

```
>>> from pyhelpers.store import save_svg_as_emf
>>> from pyhelpers.dirs import cd
>>> from pyhelpers.settings import mpl_preferences
>>> import matplotlib.pyplot as plt

>>> mpl_preferences()

>>> x, y = (1, 1), (2, 2)

>>> plt.figure()
>>> plt.plot([x[0], y[0]], [x[1], y[1]])
>>> plt.show()
```

The above example is illustrated in Fig. 7:

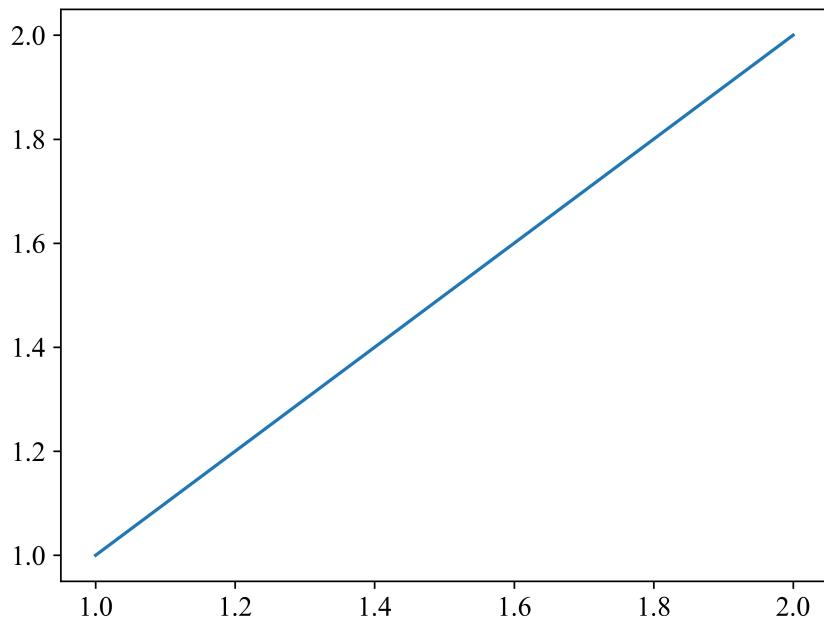


Fig. 7: An example figure created for the function `save_svg_as_emf()`.

```
>>> img_dir = cd("tests\images")
>>> svg_file_pathname = cd(img_dir, "store-save_fig-demo.svg")
>>> plt.savefig(svg_file_pathname) # Save the figure as a .svg file

>>> emf_file_pathname = cd(img_dir, "store-save_fig-demo.emf")
>>> save_svg_as_emf(svg_file_pathname, emf_file_pathname, verbose=True)
Saving the .svg file as "tests\images\store-save_fig-demo.emf" ... Done.

>>> plt.close()
```

save_fig

`pyhelpers.store.save_fig(path_to_file, dpi=None, verbose=False, conv_svg_to_emf=False, **kwargs)`

Save a figure object to a file of a supported file format.

This function relies on `matplotlib.pyplot.savefig` (and Inkscape).

Parameters

- `path_to_file (str / os.PathLike)` – path where a figure file is saved
- `dpi (int / None)` – the resolution in dots per inch; if `None` (default), use `rcParams['savefig.dpi']`
- `verbose (bool / int)` – whether to print relevant information in console, defaults to `False`

- `conv_svg_to_emf (bool)` – whether to convert a .svg file to a .emf file, defaults to False
- `kwargss` – [optional] parameters of `matplotlib.pyplot.savefig`

Examples:

```
>>> from pyhelpers.store import save_fig
>>> from pyhelpers.dirs import cd
>>> from pyhelpers.settings import mpl_preferences
>>> import matplotlib.pyplot as plt

>>> mpl_preferences()

>>> x, y = (1, 1), (2, 2)

>>> plt.figure()
>>> plt.plot([x[0], y[0]], [x[1], y[1]])
>>> plt.show()
```

The above example is illustrated in Fig. 8:

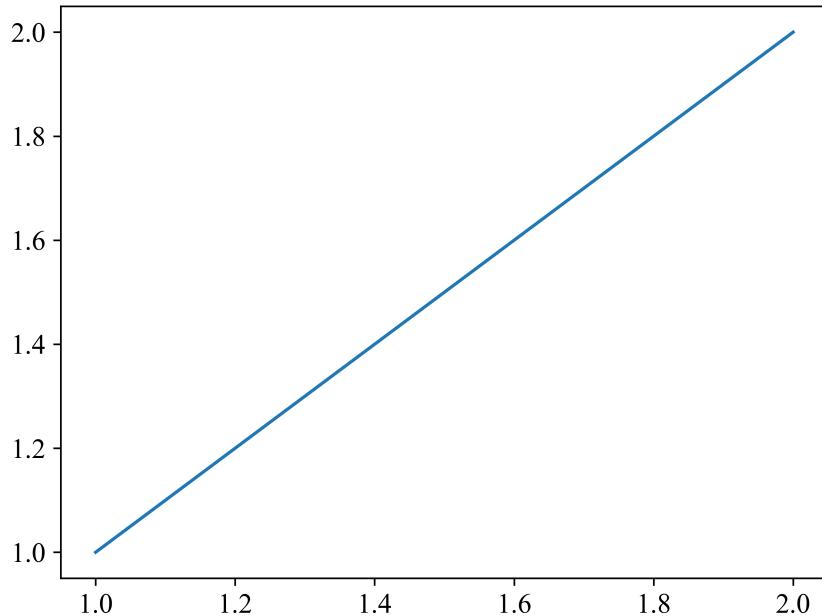


Fig. 8: An example figure created for the function `save_fig()`.

```
>>> img_dir = cd("tests\images")

>>> png_file_pathname = cd(img_dir, "store-save_fig-demo.png")
>>> save_fig(png_file_pathname, dpi=600, verbose=True)
Saving "store-save_fig-demo.png" to "tests\images\" ... Done.

>>> svg_file_pathname = cd(img_dir, "store-save_fig-demo.svg")
```

(continues on next page)

(continued from previous page)

```
>>> save_fig(svg_file_pathname, dpi=600, verbose=True, conv_svg_to_emf=True)
Saving "store-save_fig-demo.svg" to "tests\images\" ... Done.
Saving the .svg file as "tests\images\store-save_fig-demo.emf" ... Done.

>>> plt.close()
```

save_web_page_as_pdf

`pyhelpers.store.save_web_page_as_pdf(web_page, path_to_pdf, page_size='A4', zoom=1.0, encoding='UTF-8', wkhtmltopdf_options=None, wkhtmltopdf_exe=None, verbose=False, **kwargs)`

Save a web page as a PDF file by `wkhtmltopdf`.

Parameters

- `web_page` (`str`) – URL of a web page or pathname of an HTML file
- `path_to_pdf` (`str`) – path where a .pdf is saved
- `page_size` (`str`) – page size, defaults to 'A4'
- `zoom` (`float`) – a parameter to zoom in/out, defaults to 1.0
- `encoding` (`str`) – encoding format defaults to 'UTF-8'
- `wkhtmltopdf_options` (`dict` / `None`) – specify `wkhtmltopdf` options, defaults to None; check also the project description of `pdfkit`
- `wkhtmltopdf_exe` (`str` / `None`) – absolute path to 'wkhtmltopdf.exe', defaults to None; when `wkhtmltopdf_exe=None`, use the default installation path, such as "C:Program Fileswkhtmltopdfbinwkhtmltopdf.exe" (on Windows)
- `verbose` (`bool` / `int`) – whether to print relevant information in console, defaults to False
- `kwargs` – [optional] parameters of `pdfkit.from_url`

Examples:

```
>>> from pyhelpers.store import save_web_page_as_pdf
>>> from pyhelpers.dirs import cd
>>> import subprocess

>>> pdf_pathname = cd("tests\documents", "pyhelpers.pdf")

>>> web_page_url = 'https://pyhelpers.readthedocs.io/en/latest/'
>>> save_web_page_as_pdf(web_page_url, pdf_pathname)
>>> # Open the PDF file using the system's default application
>>> subprocess.Popen(pdf_pathname, shell=True)

>>> web_page_file = cd("docs\build\html\index.html")
>>> save_web_page_as_pdf(web_page_file, pdf_pathname, verbose=True)
Updating "pyhelpers.pdf" at "tests\documents\" ... Done.
>>> subprocess.Popen(pdf_pathname, shell=True)
```

(continues on next page)

(continued from previous page)

```
>>> save_web_page_as_pdf(web_page_file, pdf_pathname, verbose=2)
Updating "pyhelpers.pdf" at "tests\documents\" ...
Loading pages (1/6)
Counting pages (2/6)
Resolving links (4/6)
Loading headers and footers (5/6)
Printing pages (6/6)
Done
>>> subprocess.Popen(pdf_pathname, shell=True)
```

save_data

`pyhelpers.store.save_data(data, path_to_file, err_warning=True, confirmation_required=True, **kwargs)`

Save data to a file of a specific format.

Parameters

- **data** (any) – data that could be saved to a file of Pickle, CSV, Microsoft Excel, JSON, Joblib or Feather format; a URL of a web page or an HTML file; or an image file of a Matplotlib-supported format
- **path_to_file** (str / os.PathLike) – pathname of a file that stores the data
- **err_warning** (bool) – whether to show a warning message if any unknown error occurs, defaults to True
- **confirmation_required** (bool) – whether to require users to confirm and proceed, defaults to True
- **kwargs** – [optional] parameters of one of the following functions:
`save_pickle()`, `save_spreadsheet()`, `save_json()`, `save_joblib()`,
`save_feather()`, `save_fig()` or `save_web_page_as_pdf()`

Examples:

```
>>> from pyhelpers.store import save_data
>>> from pyhelpers.dirs import cd
>>> from pyhelpers._cache import example_dataframe

>>> data_dir = cd("tests\data")

>>> # Get an example dataframe
>>> dat = example_dataframe()
>>> dat
   City      Longitude    Latitude
London     -0.127647  51.507322
Birmingham -1.902691  52.479699
Manchester -2.245115  53.479489
Leeds      -1.543794  53.797418
```

(continues on next page)

(continued from previous page)

```
>>> # Save the data to files different formats:

>>> dat_pathname = cd(data_dir, "dat.pickle")
>>> save_data(dat, dat_pathname, verbose=True)
Saving "dat.pickle" to "tests\data\" ... Done.

>>> dat_pathname = cd(data_dir, "dat.csv")
>>> save_data(dat, dat_pathname, index=True, verbose=True)
Saving "dat.csv" to "tests\data\" ... Done.

>>> dat_pathname = cd(data_dir, "dat.xlsx")
>>> save_data(dat, dat_pathname, index=True, verbose=True)
Saving "dat.xlsx" to "tests\data\" ... Done.

>>> dat_pathname = cd(data_dir, "dat.txt")
>>> save_data(dat, dat_pathname, index=True, verbose=True)
Saving "dat.txt" to "tests\data\" ... Done.

>>> dat_pathname = cd(data_dir, "dat.feather")
>>> save_data(dat, dat_pathname, index=True, verbose=True)
Saving "dat.feather" to "tests\data\" ... Done.

>>> # Convert `dat` to JSON format
>>> import json

>>> dat_ = json.loads(dat.to_json(orient='index'))
>>> dat_
{'London': {'Longitude': -0.1276474, 'Latitude': 51.5073219},
 'Birmingham': {'Longitude': -1.9026911, 'Latitude': 52.4796992},
 'Manchester': {'Longitude': -2.2451148, 'Latitude': 53.4794892},
 'Leeds': {'Longitude': -1.5437941, 'Latitude': 53.7974185}}


>>> dat_pathname = cd(data_dir, "dat.json")
>>> save_data(dat_, dat_pathname, indent=4, verbose=True)
Saving "dat.json" to "tests\data\" ... Done.
```

See also:

- Examples for the function `pyhelpers.store.load_data()`.

3.4.2 Data loading

<code>load_pickle(path_to_file[, verbose])</code>	Load data from a <code>Pickle</code> file.
<code>load_csv(path_to_file[, delimiter, header, ...])</code>	Load data from a <code>CSV</code> file.
<code>load_spreadsheets(path_to_file[, as_dict, ...])</code>	Load multiple sheets of an <code>Microsoft Excel</code> or an <code>OpenDocument</code> format file.
<code>load_json(path_to_file[, engine, verbose])</code>	Load data from a <code>JSON</code> file.
<code>load_joblib(path_to_file[, verbose])</code>	Load data from a <code>joblib</code> file.
<code>load_feather(path_to_file[, verbose, index])</code>	Load a dataframe from a <code>Feather</code> file.
<code>load_data(path_to_file[, err_warning])</code>	Load data from a file.

load_pickle

```
pyhelpers.store.load_pickle(path_to_file, verbose=False, **kwargs)
```

Load data from a **Pickle** file.

Parameters

- **path_to_file** (*str* / *os.PathLike*) – path where a pickle file is saved
- **verbose** (*bool* / *int*) – whether to print relevant information in console, defaults to False
- **kwargs** – [optional] parameters of `pickle.load`

Returns

data retrieved from the specified path `path_to_pickle`

Return type

any

Note:

- Example data can be referred to the function `pyhelpers.store.save_pickle()`.

Examples:

```
>>> from pyhelpers.store import load_pickle
>>> from pyhelpers.dirs import cd

>>> pickle_pathname = cd("tests\data", "dat.pickle")
>>> pickle_dat = load_pickle(pickle_pathname, verbose=True)
Loading "tests\data\dat.pickle" ... Done.
>>> pickle_dat
    Longitude   Latitude
City
London      -0.127647  51.507322
Birmingham  -1.902691  52.479699
Manchester   -2.245115  53.479489
Leeds        -1.543794  53.797418
```

load_csv

```
pyhelpers.store.load_csv(path_to_file, delimiter=',', header=0, index=None, verbose=False, **kwargs)
```

Load data from a **CSV** file.

Parameters

- **path_to_file** (*str* / *os.PathLike*) – path where a **CSV** file is saved
- **delimiter** (*str*) – delimiter used between values in the data file, defaults to `' , '`
- **header** (*int* / *List[int]* / *None*) – index number of the rows used as column names, defaults to 0

- **index** (*str* / *int* / *list* / *None*) – index number of the column(s) to use as the row labels of the dataframe, defaults to *None*
- **verbose** (*bool* / *int*) – whether to print relevant information in console, defaults to *False*
- **kwarg**s – [optional] parameters of `csv.reader()` or `pandas.read_csv()`

Returns

data retrieved from the specified path `path_to_csv`

Return type

`pandas.DataFrame` | `None`

Note:

- Example data can be referred to the function `pyhelpers.store.save_spreadsheet()`.

Examples:

```
>>> from pyhelpers.store import load_csv
>>> from pyhelpers.dirs import cd

>>> csv_pathname = cd("tests\data", "dat.csv")
>>> csv_dat = load_csv(csv_pathname, index=0, verbose=True)
Loading "tests\data\dat.csv" ... Done.
>>> csv_dat
      Longitude    Latitude
City
London     -0.1276474  51.5073219
Birmingham -1.9026911  52.4796992
Manchester -2.2451148  53.4794892
Leeds       -1.5437941  53.7974185

>>> csv_pathname = cd("tests\data", "dat.txt")
>>> csv_dat = load_csv(csv_pathname, index=0, verbose=True)
Loading "tests\data\dat.txt" ... Done.
>>> csv_dat
      Longitude    Latitude
City
London     -0.1276474  51.5073219
Birmingham -1.9026911  52.4796992
Manchester -2.2451148  53.4794892
Leeds       -1.5437941  53.7974185

>>> csv_dat = load_csv(csv_pathname, header=[0, 1], verbose=True)
Loading "tests\data\dat.txt" ... Done.
>>> csv_dat
   City Easting Northing
0  London  530034   180381
1 Birmingham  406689   286822
2 Manchester  383819   398052
3    Leeds   582044   152953
```

load_spreadsheets

`pyhelpers.store.load_spreadsheets(path_to_file, as_dict=True, verbose=False, **kwargs)`

Load multiple sheets of an Microsoft Excel or an OpenDocument format file.

Parameters

- `path_to_file` (`str` / `os.PathLike`) – path where a spreadsheet is saved
- `as_dict` (`bool`) – whether to return the retrieved data as a dictionary type, defaults to `True`
- `verbose` (`bool` / `int`) – whether to print relevant information in console, defaults to `False`
- `kwargs` – [optional] parameters of `pandas.ExcelFile.parse`

Returns

all worksheet in an Excel workbook from the specified file path
`path_to_spreadsheet`

Return type

`list` | `dict`

Note:

- Example data can be referred to the functions
`pyhelpers.store.save_multiple_spreadsheets()` and
`pyhelpers.store.save_spreadsheet()`.

Examples:

```
>>> from pyhelpers.store import load_spreadsheets
>>> from pyhelpers.dirs import cd

>>> dat_dir = cd("tests\data")

>>> path_to_xlsx = cd(dat_dir, "dat.ods")
>>> wb_data = load_spreadsheets(path_to_xlsx, verbose=True, index_col=0)
Loading "tests\data\dat.ods" ...
'TestSheet1'. ... Done.
'TestSheet2'. ... Done.
>>> list(wb_data.keys())
['TestSheet1', 'TestSheet2']
>>> wb_data['TestSheet1']
   Longitude Latitude
City
London      -0.127647  51.507322
Birmingham  -1.902691  52.479699
Manchester  -2.245115  53.479489
Leeds        -1.543794  53.797418

>>> path_to_xlsx = cd(dat_dir, "dat.xlsx")
>>> wb_data = load_spreadsheets(path_to_xlsx, verbose=True, index_col=0)
Loading "tests\data\dat.xlsx" ...
```

(continues on next page)

(continued from previous page)

```
'TestSheet1'. .... Done.
'TestSheet2'. .... Done.
'TestSheet11'. .... Done.
'TestSheet21'. .... Done.
'TestSheet12'. .... Done.
'TestSheet22'. .... Done.
>>> list(wb_data.keys())
['TestSheet1',
 'TestSheet2',
 'TestSheet11',
 'TestSheet21',
 'TestSheet12',
 'TestSheet22']

>>> wb_data = load_spreadsheets(path_to_xlsx, as_dict=False, index_col=0)
>>> type(wb_data)
list
>>> len(wb_data)
6
>>> wb_data[0]
      Longitude   Latitude
City
London      -0.127647  51.507322
Birmingham -1.902691  52.479699
Manchester -2.245115  53.479489
Leeds        -1.543794  53.797418
```

load_json

`pyhelpers.store.load_json(path_to_file, engine=None, verbose=False, **kwargs)`

Load data from a [JSON](#) file.

Parameters

- `path_to_file (str / os.PathLike)` – path where a json file is saved
- `engine (str / None)` – an open-source Python package for JSON serialization, options include `None` (default, for the built-in [json module](#)), '`ujson`' (for [UltraJSON](#)), '`orjson`' (for [orjson](#)) and '`rapidjson`' (for [python-rapidjson](#))
- `verbose (bool / int)` – whether to print relevant information in console, defaults to `False`
- `kwargs` – [optional] parameters of `json.load()` (if `engine=None`), `orjson.loads()` (if `engine='orjson'`), `ujson.load()` (if `engine='ujson'`) or `rapidjson.load()` (if `engine='rapidjson'`)

Returns

data retrieved from the specified path `path_to_json`

Return type

`dict`

Note:

- Example data can be referred to the function `pyhelpers.store.save_json()`.

Examples:

```
>>> from pyhelpers.store import load_json
>>> from pyhelpers.dirs import cd

>>> json_path = cd("tests\data", "dat.json")
>>> json_dat = load_json(json_path, verbose=True)
Loading "tests\data\dat.json" ... Done.
>>> json_dat
{'London': {'Longitude': -0.1276474, 'Latitude': 51.5073219},
 'Birmingham': {'Longitude': -1.9026911, 'Latitude': 52.4796992},
 'Manchester': {'Longitude': -2.2451148, 'Latitude': 53.4794892},
 'Leeds': {'Longitude': -1.5437941, 'Latitude': 53.7974185}}
```

load_joblib

`pyhelpers.store.load_joblib(path_to_file, verbose=False, **kwargs)`

Load data from a `joblib` file.

Parameters

- `path_to_file` (`str` / `os.PathLike`) – path where a `joblib` file is saved
- `verbose` (`bool` / `int`) – whether to print relevant information in console, defaults to `False`
- `kwargs` – [optional] parameters of `joblib.load`

Returns

data retrieved from the specified path `path_to_joblib`

Return type

`any`

Note:

- Example data can be referred to the function `pyhelpers.store.save_joblib()`.

Examples:

```
>>> from pyhelpers.store import load_joblib
>>> from pyhelpers.dirs import cd

>>> joblib_pathname = cd("tests\data", "dat.joblib")
>>> joblib_dat = load_joblib(joblib_pathname, verbose=True)
Loading "tests\data\dat.joblib" ... Done.
>>> joblib_dat
array([[0.5488135, 0.71518937, 0.60276338, ..., 0.02010755, 0.82894003,
```

(continues on next page)

(continued from previous page)

```

0.00469548] ,
[0.67781654, 0.27000797, 0.73519402, ..., 0.25435648, 0.05802916,
0.43441663] ,
[0.31179588, 0.69634349, 0.37775184, ..., 0.86219152, 0.97291949,
0.96083466] ,
... ,
[0.89111234, 0.26867428, 0.84028499, ..., 0.5736796 , 0.73729114,
0.22519844] ,
[0.26969792, 0.73882539, 0.80714479, ..., 0.94836806, 0.88130699,
0.1419334 ] ,
[0.88498232, 0.19701397, 0.56861333, ..., 0.75842952, 0.02378743,
0.81357508]) )

```

load_feather

`pyhelpers.store.load_feather(path_to_file, verbose=False, index=None, **kwargs)`

Load a dataframe from a `Feather` file.

Parameters

- `path_to_file` (`str` / `os.PathLike`) – path where a feather file is saved
- `index` (`str` / `int` / `list` / `None`) – index number of the column(s) to use as the row labels of the dataframe, defaults to `None`
- `verbose` (`bool` / `int`) – whether to print relevant information in console, defaults to `False`
- `kwargs` – [optional] parameters of `pandas.read_feather`
 - `columns`: a sequence of column names, if `None`, all columns
 - `use_threads`: whether to parallelize reading using multiple threads, defaults to `True`

Returns

data retrieved from the specified path `path_to_feather`

Return type

`pandas.DataFrame`

Note:

- Example data can be referred to the function `pyhelpers.store.save_feather()`.

Examples:

```

>>> from pyhelpers.store import load_feather
>>> from pyhelpers.dirs import cd

>>> feather_path = cd("tests\data", "dat.feather")
>>> feather_dat = load_feather(feather_path, index=0, verbose=True)

```

(continues on next page)

(continued from previous page)

```
Loading "tests\data\dat.feather" ... Done.
>>> feather_dat
      Longitude   Latitude
City
London      -0.127647  51.507322
Birmingham  -1.902691  52.479699
Manchester  -2.245115  53.479489
Leeds        -1.543794  53.797418
```

load_data

`pyhelpers.store.load_data(path_to_file, err_warning=True, **kwargs)`

Load data from a file.

Parameters

- `path_to_file (str / os.PathLike)` – pathname of a file; supported file formats include **Pickle**, **CSV**, **Microsoft Excel** spreadsheet, **JSON**, **Joblib** and **Feather**
- `err_warning (bool)` – whether to show a warning message if any unknown error occurs, defaults to True
- `kwargs` – [optional] parameters of one of the following functions:
`load_pickle()`, `load_csv()`, `load_multiple_spreadsheets()`,
`load_json()`, `load_joblib()` or `load_feather()`

Returns

loaded data

Return type

any

Note:

- Example data can be referred to the function `pyhelpers.store.save_data()`.

Examples:

```
>>> from pyhelpers.store import load_data
>>> from pyhelpers.dirs import cd

>>> data_dir = cd("tests\data")

>>> dat_pathname = cd(data_dir, "dat.pickle")
>>> pickle_dat = load_data(path_to_file=dat_pathname, verbose=True)
Loading "tests\data\dat.pickle" ... Done.
>>> pickle_dat
      Longitude   Latitude
City
London      -0.127647  51.507322
```

(continues on next page)

(continued from previous page)

```

Birmingham -1.902691 52.479699
Manchester -2.245115 53.479489
Leeds      -1.543794 53.797418

>>> dat_pathname = cd(data_dir, "dat.csv")
>>> csv_dat = load_data(path_to_file=dat_pathname, index=0, verbose=True)
Loading "tests\data\dat.csv" ... Done.
>>> csv_dat
      Longitude   Latitude
City
London      -0.127647 51.507322
Birmingham -1.902691 52.479699
Manchester -2.245115 53.479489
Leeds       -1.543794 53.797418

>>> dat_pathname = cd(data_dir, "dat.json")
>>> json_dat = load_data(path_to_file=dat_pathname, verbose=True)
Loading "tests\data\dat.json" ... Done.
>>> json_dat
{'London': {'Longitude': -0.1276474, 'Latitude': 51.5073219},
 'Birmingham': {'Longitude': -1.9026911, 'Latitude': 52.4796992},
 'Manchester': {'Longitude': -2.2451148, 'Latitude': 53.4794892},
 'Leeds': {'Longitude': -1.5437941, 'Latitude': 53.7974185}}


>>> dat_pathname = cd(data_dir, "dat.feather")
>>> feather_dat = load_data(path_to_file=dat_pathname, index=0, verbose=True)
Loading "tests\data\dat.feather" ... Done.
>>> feather_dat
      Longitude   Latitude
City
London      -0.127647 51.507322
Birmingham -1.902691 52.479699
Manchester -2.245115 53.479489
Leeds       -1.543794 53.797418

>>> dat_pathname = cd(data_dir, "dat.joblib")
>>> joblib_dat = load_data(path_to_file=dat_pathname, verbose=True)
Loading "tests\data\dat.joblib" ... Done.
>>> joblib_dat
array([[0.5488135 , 0.71518937, 0.60276338, ..., 0.02010755, 0.82894003,
       0.00469548],
       [0.67781654, 0.27000797, 0.73519402, ..., 0.25435648, 0.05802916,
       0.43441663],
       [0.31179588, 0.69634349, 0.37775184, ..., 0.86219152, 0.97291949,
       0.96083466],
       ...,
       [0.89111234, 0.26867428, 0.84028499, ..., 0.5736796 , 0.73729114,
       0.22519844],
       [0.26969792, 0.73882539, 0.80714479, ..., 0.94836806, 0.88130699,
       0.1419334 ],
       [0.88498232, 0.19701397, 0.56861333, ..., 0.75842952, 0.02378743,
       0.81357508]])

```

3.4.3 File decompression

<code>unzip(path_to_zip_file[, out_dir, verbose])</code>	Extract data from a zipped (compressed) file.
<code>seven_zip(path_to_zip_file[, out_dir, mode, ...])</code>	Extract data from a compressed file by using 7-Zip .

unzip

`pyhelpers.store.unzip(path_to_zip_file, out_dir=None, verbose=False, **kwargs)`

Extract data from a [zipped \(compressed\)](#) file.

Parameters

- `path_to_zip_file (str / os.PathLike)` – path where a Zip file is saved
- `out_dir (str / None)` – path to a directory where the extracted data is saved, defaults to None
- `verbose (bool / int)` – whether to print relevant information in console, defaults to False
- `kwargs` – [optional] parameters of `zipfile.ZipFile.extractall`

Examples:

```
>>> from pyhelpers.store import unzip
>>> from pyhelpers.dirs import cd, delete_dir

>>> zip_file_path = cd("tests\data", "zipped.zip")

>>> unzip(path_to_zip_file=zip_file_path, verbose=True)
Extracting "tests\data\zipped.zip" to "tests\data\zipped\" ... Done.
>>> out_file_pathname = cd("tests\data\zipped", "zipped.txt")
>>> with open(out_file_pathname) as f:
...     print(f.read())
test

>>> output_dir = cd("tests\data\zipped_alt")
>>> unzip(path_to_zip_file=zip_file_path, out_dir=output_dir, verbose=True)
Extracting "tests\data\zipped.zip" to "tests\data\zipped_alt\" ... Done.
>>> out_file_pathname = cd("tests\data\zipped_alt", "zipped.txt")
>>> with open(out_file_pathname) as f:
...     print(f.read())
test

>>> # Delete the directories "tests\data\zipped\" and "tests\data\zipped_alt\
>>> delete_dir([cd("tests\data\zipped"), output_dir], verbose=True)
To delete the following directories:
    "tests\data\zipped\" (Not empty)
    "tests\data\zipped_alt\" (Not empty)
? [No] | Yes: yes
Deleting "tests\data\zipped\" ... Done.
Deleting "tests\data\zipped_alt\" ... Done.
```

seven_zip

```
pyhelpers.store.seven_zip(path_to_zip_file, out_dir=None, mode='aoa', verbose=False,
                           seven_zip_exe=None, **kwargs)
```

Extract data from a compressed file by using [7-Zip](#).

Parameters

- **path_to_zip_file** (*str* / *os.PathLike*) – path where a compressed file is saved
- **out_dir** (*str* / *None*) – path to a directory where the extracted data is saved, defaults to *None*
- **mode** (*str*) – defaults to 'aoa'
- **verbose** (*bool* / *int*) – whether to print relevant information in console, defaults to *False*
- **seven_zip_exe** (*str* / *None*) – absolute path to '7z.exe', defaults to *None*; when *seven_zip_exe*=*None*, use the default installation path, e.g. (on Windows) "C:\Program Files\7-Zip\7z.exe"
- **kwargs** – [optional] parameters of `subprocess.run`

Examples:

```
>>> from pyhelpers.store import seven_zip
>>> from pyhelpers.dirs import cd, delete_dir

>>> zip_file_pathname = cd("tests\data", "zipped.zip")

>>> seven_zip(path_to_zip_file=zip_file_pathname, verbose=True)
7-Zip 20.00 alpha (x64) : Copyright (c) 1999-2020 Igor Pavlov : 2020-02-06

Scanning the drive for archives:
1 file, 158 bytes (1 KiB)

Extracting archive: \tests\data\zipped.zip
--
Path = \tests\data\zipped.zip
Type = zip
Physical Size = 158

Everything is Ok

Size:      4
Compressed: 158

Done.

>>> out_file_pathname = cd("tests\data\zipped", "zipped.txt")
>>> with open(out_file_pathname) as f:
...     print(f.read())
test

>>> output_dir = cd("tests\data\zipped_alt")
```

(continues on next page)

(continued from previous page)

```
>>> seven_zip(path_to_zip_file=zip_file_pathname, out_dir=output_dir, verbose=False)

>>> out_file_pathname = cd("tests\data\zipped_alt", "zipped.txt")
>>> with open(out_file_pathname) as f:
...     print(f.read())
test

>>> # Extract a .7z file
>>> zip_file_path = cd("tests\data", "zipped.7z")
>>> seven_zip(path_to_zip_file=zip_file_path, out_dir=output_dir)

>>> out_file_pathname = cd("tests\data\zipped", "zipped.txt")
>>> with open(out_file_pathname) as f:
...     print(f.read())
test

>>> # Delete the directories "tests\data\zipped\" and "tests\data\zipped_alt\
>>> delete_dir([cd("tests\data\zipped"), output_dir], verbose=True)
To delete the following directories:
    "tests\data\zipped\" (Not empty)
    "tests\data\zipped_alt\" (Not empty)
? [No]|Yes: yes
Deleting "tests\data\zipped\" ... Done.
Deleting "tests\data\zipped_alt\" ... Done.
```

3.4.4 File conversion

<code>markdown_to_rst(path_to_md, path_to_rst[, ...])</code>	Convert a <code>Markdown</code> file (.md) to a <code>reStructuredText</code> (.rst) file.
<code>xlsx_to_csv(path_to_xlsx[, path_to_csv, ...])</code>	Convert Microsoft Excel spreadsheet (in the format .xlsx/.xls) to a CSV file.

markdown_to_rst

`pyhelpers.store.markdown_to_rst(path_to_md, path_to_rst, reverse=False, engine=None, pandoc_exe=None, verbose=False, **kwargs)`

Convert a `Markdown` file (.md) to a `reStructuredText` (.rst) file.

This function relies on `Pandoc` or `pypandoc`.

Parameters

- `path_to_md (str / os.PathLike)` – path where a markdown file is saved
- `path_to_rst (str / os.PathLike)` – path where a reStructuredText file is saved
- `reverse (bool)` – whether to convert a .rst file to a .md file, defaults to False
- `engine (None / str)` – engine/module used for performing the conversion, defaults to None; an alternative option is 'pypandoc'

- **pandoc_exe** (*str* / *None*) – absolute path to the executable “pandoc.exe”, defaults to None; when `pandoc_exe=None`, use the default installation path, e.g. (on Windows) “*C:\Program Files\Pandoc\pandoc.exe*”
- **verbose** (*bool* / *int*) – whether to print relevant information in console, defaults to False
- **kwargs** – [optional] parameters of `subprocess.run` (when `engine=None`) or `pypandoc.convert_file` (when `engine='pypandoc'`)

Examples:

```
>>> from pyhelpers.store import markdown_to_rst
>>> from pyhelpers.dirs import cd

>>> dat_dir = cd("tests\documents")
>>> path_to_md_file = cd(dat_dir, "readme.md")
>>> path_to_RST_file = cd(dat_dir, "readme.rst")

>>> markdown_to_rst(path_to_md_file, path_to_RST_file, verbose=True)
Converting "tests\data\markdown.md" to "tests\data\markdown.rst" ... Done.

>>> markdown_to_rst(path_to_md_file, path_to_RST_file, engine='pypandoc', verbose=True)
Updating "readme.rst" at "tests\documents\" ... Done.
```

xlsx_to_csv

`pyhelpers.store.xlsx_to_csv(path_to_xlsx, path_to_csv=None, engine=None, if_exists='replace', vbscript=None, sheet_name='1', ret_null=False, verbose=False, **kwargs)`

Convert Microsoft Excel spreadsheet (in the format .xlsx/.xls) to a CSV file.

See also [STORE-XTC-1].

Parameters

- **path_to_xlsx** (*str* / *os.PathLike*) – pathname of an Excel spreadsheet (in the format of .xlsx)
- **path_to_csv** (*str* / *os.PathLike* / *None*) – pathname of a CSV format file; when `csv_pathname=None` (default), the target CSV file is generated as a `tempfile.NamedTemporaryFile`; when `csv_pathname=""`, the target CSV file is generated at the same directory where the source Excel spreadsheet is; otherwise, it could also be a specific pathname
- **engine** (*str* / *None*) – engine used for converting .xlsx/.xls to .csv; when `engine=None` (default), a Microsoft VBScript (Visual Basic Script) is used; when `engine='xlsx2csv'`, the function would rely on `xlsx2csv`
- **if_exists** (*str*) – how to proceed if the target `csv_pathname` exists, defaults to 'replace'
- **vbscript** (*str* / *None*) – pathname of a VB script used for converting .xlsx/.xls to .csv, defaults to None

- **sheet_name** (*str*) – name of the target worksheet in the given Excel file, defaults to '1'
- **ret_null** – whether to return something depending on the specified engine, defaults to False
- **verbose** (*bool* / *int*) – whether to print relevant information in console, defaults to False
- **kwargs** – [optional] parameters of the function `subprocess.run`

Returns

the pathname of the generated CSV file or None, when `engine=None`; `io.StringIO` buffer, when `engine='xlsx2csv'`

Return type

`str` | `_io.StringIO` | `None`

Examples:

```
>>> from pyhelpers.store import xlsx_to_csv, load_csv
>>> from pyhelpers.dirs import cd
>>> import os

>>> path_to_test_xlsx = cd("tests\data", "dat.xlsx")

>>> path_to_temp_csv = xlsx_to_csv(path_to_test_xlsx, verbose=True)
Converting "tests\data\dat.xlsx" to a (temporary) CSV file ... Done.
>>> os.path.isfile(path_to_temp_csv)
True
>>> data = load_csv(path_to_temp_csv, index=0)
>>> data
      Longitude    Latitude
City
London      -0.1276474  51.5073219
Birmingham   -1.9026911  52.4796992
Manchester   -2.2451148  53.4794892
Leeds        -1.5437941  53.7974185

>>> # Set `engine='xlsx2csv'`
>>> temp_csv_buffer = xlsx_to_csv(path_to_test_xlsx, engine='xlsx2csv', verbose=True)
Converting "tests\data\dat.xlsx" to a (temporary) CSV file ... Done.
>>> # import pandas as pd; data_ = pandas.read_csv(io_buffer, index_col=0)
>>> data_ = load_csv(temp_csv_buffer, index=0)
>>> data_
      Longitude    Latitude
City
London      -0.127647  51.507322
Birmingham   -1.902691  52.479699
Manchester   -2.245115  53.479489
Leeds        -1.543794  53.797418

>>> data.astype('float16').equals(data_.astype('float16'))
True

>>> # Remove the temporary CSV file
>>> os.remove(path_to_temp_csv)
```

3.5 geom

Manipulation of geometric/geographical data.

3.5.1 Geometric data transformation

Geometric type

<code>transform_geom_point_type(*pts[, as_geom])</code>	Transform iterable to <code>shapely.geometry.Point</code> type, or the other way round.
---------------------------------------------------------	-----------------------------------------------------------------------------------------

transform_geom_point_type

`pyhelpers.geom.transform_geom_point_type(*pts, as_geom=True)`

Transform iterable to `shapely.geometry.Point` type, or the other way round.

Parameters

- `pts` (*list or tuple or shapely.geometry.Point*) – data of points (e.g. list of lists/tuples)
- `as_geom` (*bool*) – whether to return point(s) as `shapely.geometry.Point`, defaults to True

Returns

a sequence of points (incl. None if errors occur)

Return type

`Generator[shapely.geometry.Point, list, tuple, numpy.ndarray]`

Examples:

```
>>> from pyhelpers.geom import transform_geom_point_type
>>> from pyhelpers._cache import example_dataframe
>>> from shapely.geometry import Point

>>> example_df = example_dataframe()
>>> example_df
   City      Longitude    Latitude
London     -0.127647  51.507322
Birmingham -1.902691  52.479699
Manchester -2.245115  53.479489
Leeds       -1.543794  53.797418

>>> pt1 = example_df.loc['London'].values # array([-0.1276474, 51.5073219])
>>> pt2 = example_df.loc['Birmingham'].values # array([-1.9026911, 52.4796992])

>>> geom_points = transform_geom_point_type(pt1, pt2)
>>> for x in geom_points:
...     print(x)
```

(continues on next page)

(continued from previous page)

```

POINT (-0.1276474 51.5073219)
POINT (-1.9026911 52.4796992)

>>> geom_points = transform_geom_point_type(pt1, pt2, as_geom=False)
>>> for x in geom_points:
...     print(x)
[-0.1276474 51.5073219]
[-1.9026911 52.4796992]

>>> pt1, pt2 = map(Point, (pt1, pt2))

>>> geom_points = transform_geom_point_type(pt1, pt2)
>>> for x in geom_points:
...     print(x)
POINT (-0.1276474 51.5073219)
POINT (-1.9026911 52.4796992)

>>> geom_points = transform_geom_point_type(pt1, pt2, as_geom=False)
>>> for x in geom_points:
...     print(x)
(-0.1276474, 51.5073219)
(-1.9026911, 52.4796992)

>>> geom_points_ = transform_geom_point_type(Point([1, 2, 3]), as_geom=False)
>>> for x in geom_points_:
...     print(x)
(1.0, 2.0, 3.0)

```

Coordinate system

<code>wgs84_to_osgb36(longitudes, latitudes[, ...])</code>	Convert latitude and longitude (WGS84) to British national grid (OSGB36).
<code>osgb36_to_wgs84(eastings, northings[, as_array])</code>	Convert British national grid (OSGB36) to latitude and longitude (WGS84).

wgs84_to_osgb36

`pyhelpers.geom.wgs84_to_osgb36(longitudes, latitudes, as_array=False, **kwargs)`

Convert latitude and longitude ([WGS84](#)) to British national grid ([OSGB36](#)).

Parameters

- `longitudes` (`int or float or Iterable[int, float]`) – the longitude (abbr: long., λ , or lambda) of a point on Earth's surface
- `latitudes` (`int or float or Iterable[int, float]`) – the latitude (abbr: lat., φ , or phi) of a point on Earth's surface
- `as_array` (`bool`) – whether to return an array, defaults to False
- `kwargs` – [optional] parameters of `pyproj.Transformer.transform`

Returns

geographic Cartesian coordinate (Easting, Northing) or (X, Y)

Return type

tuple or numpy.ndarray

Examples:

```
>>> from pyhelpers.geom import wgs84_to_osgb36
>>> from pyhelpers._cache import example_dataframe

>>> example_df = example_dataframe()
>>> example_df
   City          Longitude      Latitude
London     -0.127647    51.507322
Birmingham -1.902691    52.479699
Manchester -2.245115    53.479489
Leeds      -1.543794    53.797418

>>> lon, lat = example_df.loc['London'].values
>>> x, y = wgs84_to_osgb36(longitudes=lon, latitudes=lat)
>>> print(f"London (Easting, Northing): {x, y}")
London (Easting, Northing): (530039.558844505, 180371.68016544735)

>>> lonlat_array = example_df.to_numpy()
>>> lonlat_array
array([[-0.1276474, 51.5073219],
       [-1.9026911, 52.4796992],
       [-2.2451148, 53.4794892],
       [-1.5437941, 53.7974185]])

>>> lons, lats = lonlat_array.T # lonlat_array[:, 0], lonlat_array[:, 1]
>>> xs, ys = wgs84_to_osgb36(longitudes=lons, latitudes=lats)
>>> xs
array([530039.5588445, 406705.8870136, 383830.03903573, 430147.44735387])
>>> ys
array([180371.68016545, 286868.16664219, 398113.05583091, 433553.32711728])

>>> xy_array = wgs84_to_osgb36(longitudes=lons, latitudes=lats, as_array=True)
>>> xy_array
array([[530039.5588445, 180371.68016545],
       [406705.8870136, 286868.16664219],
       [383830.03903573, 398113.05583091],
       [430147.44735387, 433553.32711728]])
```

osgb36_to_wgs84

`pyhelpers.geom.osgb36_to_wgs84(eastings, northings, as_array=False, **kwargs)`

Convert British national grid ([OSGB36](#)) to latitude and longitude ([WGS84](#)).

Parameters

- **eastings** (*int or float or Iterable[int, float]*) – Easting (X), eastward-measured distance (or the x-coordinate)

- **northing** (*int or float or Iterable[int, float]*) – Northing (Y), northward-measured distance (or the y-coordinate)
- **as_array** (*bool*) – whether to return an array, defaults to False
- **kwargs** – [optional] parameters of `pyproj.Transformer.transform`

Returns

geographic coordinate (Longitude, Latitude)

Return type

tuple or numpy.ndarray

Examples:

```
>>> from pyhelpers.geom import osgb36_to_wgs84
>>> from pyhelpers._cache import example_dataframe

>>> example_df = example_dataframe(osgb36=True)
>>> example_df
      Easting      Northing
City
London    530039.558844  180371.680166
Birmingham 406705.887014  286868.166642
Manchester 383830.039036  398113.055831
Leeds     430147.447354  433553.327117

>>> x, y = example_df.loc['London'].values
>>> lon, lat = osgb36_to_wgs84(eastings=x, northing=y)
>>> print(f"London (Longitude, Latitude): {lon, lat}")
London (Longitude, Latitude): (-0.12764738749567286, 51.50732189539607)

>>> xy_array = example_df.to_numpy()
>>> xs, ys = xy_array.T # xy_array[:, 0], xy_array[:, 1]
>>> lons, lats = osgb36_to_wgs84(eastings=xs, northing=ys)
>>> lons
array([-0.12764739, -1.90269109, -2.24511479, -1.54379409])
>>> lats
array([51.5073219, 52.4796992, 53.4794892, 53.7974185])

>>> lonlat_array = osgb36_to_wgs84(eastings=xs, northing=ys, as_array=True)
>>> lonlat_array
array([[-0.12764739, 51.5073219],
       [-1.90269109, 52.4796992],
       [-2.24511479, 53.4794892],
       [-1.54379409, 53.7974185]])
```

Dimension / Projection

<code>drop_axis(geom[, axis, as_array])</code>	Drop an axis from a given 3D geometry object.
<code>project_point_to_line(point, line[, ...])</code>	Find the projected point from a known point to a line.

drop_axis

`pyhelpers.geom.drop_axis(geom, axis='z', as_array=False)`

Drop an axis from a given 3D geometry object.

Parameters

- `geom (shapely.geometry object)` – geometry object that has x, y and z coordinates
- `axis (str)` – options include 'x', 'y' and 'z', defaults to 'z'
- `as_array (bool)` – whether to return an array, defaults to False

Returns

geometry object (or an array) without the specified axis

Return type

`shapely.geometry object or numpy.ndarray`

Examples:

```
>>> from pyhelpers.geom import drop_axis
>>> from shapely.geometry import Point, LineString, Polygon, MultiLineString

>>> geom_1 = Point([1, 2, 3])
>>> geom_1.wkt
'POINT Z (1 2 3)'
>>> geom_1_ = drop_axis(geom_1, 'x')
>>> geom_1_.wkt
'POINT (2 3)'
>>> geom_1_ = drop_axis(geom_1, 'x', as_array=True)
>>> geom_1_
array([2., 3.])

>>> geom_2 = LineString([[1, 2, 3], [2, 3, 4], [3, 4, 5]])
>>> geom_2.wkt
'LINESTRING Z (1 2 3, 2 3 4, 3 4 5)'
>>> geom_2_ = drop_axis(geom_2, 'y')
>>> geom_2_.wkt
'LINESTRING (1 3, 2 4, 3 5)'
>>> geom_2_ = drop_axis(geom_2, 'y', as_array=True)
>>> geom_2_
array([[1., 3.],
       [2., 4.],
       [3., 5.]])

>>> geom_3 = Polygon([[6, 3, 5], [6, 3, 0], [6, 1, 0], [6, 1, 5], [6, 3, 5]])
>>> geom_3.wkt
'POLYGON Z ((6 3 5, 6 3 0, 6 1 0, 6 1 5, 6 3 5))'
>>> geom_3_ = drop_axis(geom_3, 'z')
>>> geom_3_.wkt
'POLYGON ((6 3, 6 3, 6 1, 6 1, 6 3))'
>>> geom_3_ = drop_axis(geom_3, 'z', as_array=True)
>>> geom_3_
array([[6., 3.],
       [6., 3.],
       [6., 1.],
```

(continues on next page)

(continued from previous page)

```
[6., 1.],
[6., 3.])

>>> ls1 = LineString([[1, 2, 3], [2, 3, 4], [3, 4, 5]])
>>> ls2 = LineString([[2, 3, 4], [1, 2, 3], [3, 4, 5]])
>>> geom_4 = MultiLineString([ls1, ls2])
>>> geom_4.wkt
'MULTILINESTRING Z ((1 2 3, 2 3 4, 3 4 5), (2 3 4, 1 2 3, 3 4 5))'
>>> geom_4_ = drop_axis(geom_4, 'z')
>>> geom_4_.wkt
'MULTILINESTRING ((1 2, 2 3, 3 4), (2 3, 1 2, 3 4))'
>>> geom_4_ = drop_axis(geom_4, 'z', as_array=True)
>>> geom_4_
array([[[1., 2.],
       [2., 3.],
       [3., 4.]],

      [[2., 3.],
       [1., 2.],
       [3., 4.]]])
```

project_point_to_line

`pyhelpers.geom.project_point_to_line(point, line, drop_dimension=None)`

Find the projected point from a known point to a line.

Parameters

- `point` (`shapely.geometry.Point`) – geometry object of a point
- `line` (`shapely.geometry.LineString`) – geometry object of a line
- `drop_dimension` (`str or None`) – which dimension to drop, defaults to `None`; options include '`x`', '`y`' and '`z`'

Returns

the original point (with all or partial dimensions, given `drop`) and the projected one

Return type

`tuple`

Examples:

```
>>> from pyhelpers.geom import project_point_to_line
>>> from shapely.geometry import Point, LineString, MultiPoint

>>> pt = Point([399297, 655095, 43])
>>> ls = LineString([[399299, 655091, 42], [399295, 655099, 42]])

>>> _, pt_proj = project_point_to_line(point=pt, line=ls)
>>> pt_proj.wkt
'POINT Z (399297 655095 42)'
```

This example is illustrated below (see Fig. 9):

```

>>> import matplotlib.pyplot as plt
>>> from pyhelpers.settings import mpl_preferences

>>> mpl_preferences(font_name='Times New Roman', font_size=12)

>>> fig = plt.figure()
>>> ax = fig.add_subplot(projection='3d')

>>> ls_zs = list(map(lambda c: c[2], ls.coords))
>>> ax.plot(ls.coords.xy[0], ls.coords.xy[1], ls_zs, label='Line')
>>> ax.scatter(pt.x, pt.y, pt.z, label='Point')
>>> ax.scatter(pt_proj.x, pt_proj.y, pt_proj.z, label='Projected point')

>>> for i in MultiPoint([*ls.coords, pt, pt_proj]).geoms:
...     pos = tuple(map(int, i.coords[0]))
...     ax.text(pos[0], pos[1], pos[2], str(pos))

>>> ax.legend(loc=3)
>>> plt.tight_layout()

>>> ax.set_xticklabels([])
>>> ax.set_yticklabels([])
>>> ax.set_zticklabels([])

>>> plt.show()

```

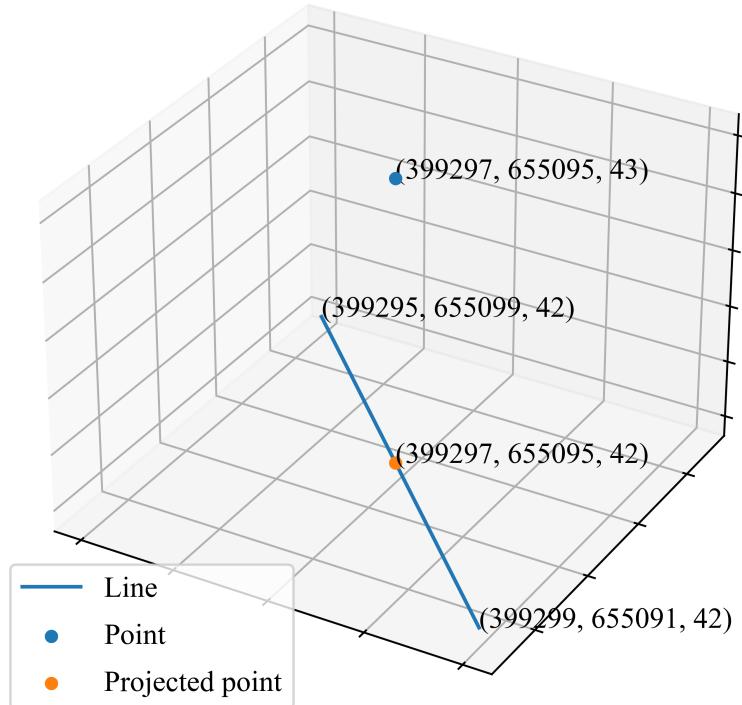


Fig. 9: An example of projecting a point onto a line.

3.5.2 Geometric data computation

Distance

<code>calc_distance_on_unit_sphere(pt1, pt2[, ...])</code>	Calculate distance between two points.
<code>calc_hypotenuse_distance(pt1, pt2)</code>	Calculate hypotenuse given two points (the right-angled triangle, given its side and perpendicular).
<code>find_closest_point(pt, ref_pts[, as_geom])</code>	Find the closest point of the given point to a list of points.
<code>find_closest_points(pts, ref_pts[, k, ...])</code>	Find the closest points from a list of reference points (applicable for vectorized computation).
<code>find_shortest_path(points_sequence[, ...])</code>	Find the shortest path through a sequence of points.

calc_distance_on_unit_sphere

`pyhelpers.geom.calc_distance_on_unit_sphere(pt1, pt2, unit='mile', precision=None)`

Calculate distance between two points.

Parameters

- `pt1` (`shapely.geometry.Point` / `tuple` / `numpy.ndarray`) – one point
- `pt2` (`shapely.geometry.Point` / `tuple` / `numpy.ndarray`) – another point
- `unit` (`str`) – distance unit (for output), defaults to 'miles'; valid options include 'mile' and 'km'
- `precision` (`None` / `int`) – decimal places of the calculated result, defaults to None

Returns

distance (in miles) between pt1 and pt2 (relative to the earth's radius)

Return type

`float` | `None`

Examples:

```
>>> from pyhelpers.geom import calc_distance_on_unit_sphere
>>> from pyhelpers._cache import example_dataframe

>>> example_df = example_dataframe()
>>> example_df
   City      Longitude    Latitude
London     -0.127647  51.507322
Birmingham -1.902691  52.479699
```

(continues on next page)

(continued from previous page)

```

Manchester -2.245115 53.479489
Leeds      -1.543794 53.797418

>>> london, birmingham = example_df.loc[['London', 'Birmingham']].values
>>> london
array([-0.1276474, 51.5073219])
>>> birmingham
array([-1.9026911, 52.4796992])

>>> arc_len_in_miles = calc_distance_on_unit_sphere(london, birmingham)
>>> arc_len_in_miles # in miles
101.10431101941569

>>> arc_len_in_miles = calc_distance_on_unit_sphere(london, birmingham, precision=4)
>>> arc_len_in_miles
101.1043

```

Note: This function is modified from the original code available at [GEOM-CDOUS-1]. It assumes the earth is perfectly spherical and returns the distance based on each point's longitude and latitude.

calc_hypotenuse_distance

`pyhelpers.geom.calc_hypotenuse_distance(pt1, pt2)`

Calculate hypotenuse given two points (the right-angled triangle, given its side and perpendicular).

See also [GEOM-CHD-1].

Parameters

- `pt1` (`shapely.geometry.Point` or `list` or `tuple` or `numpy.ndarray`)
 - a point
- `pt2` (`shapely.geometry.Point` or `list` or `tuple` or `numpy.ndarray`)
 - another point

Returns

`hypotenuse`

Return type

`float`

Note:

- This is the length of the vector from the `orig_pt` to `dest_pt`.
 - `numpy.hypot(x, y)` return the Euclidean norm, $\sqrt{x*x + y*y}$.
-

Examples:

```
>>> from pyhelpers.geom import calc_hypotenuse_distance
>>> from shapely.geometry import Point

>>> pt_1, pt_2 = (1.5429, 52.6347), (1.4909, 52.6271)
>>> hypot_distance = calc_hypotenuse_distance(pt_1, pt_2)
>>> hypot_distance
0.05255244999046248

>>> pt_1_, pt_2_ = map(Point, (pt_1, pt_2))
>>> pt_1_.wkt
'POINT (1.5429 52.6347)'
>>> pt_2_.wkt
'POINT (1.4909 52.6271)'
>>> hypot_distance = calc_hypotenuse_distance(pt_1_, pt_2_)
>>> hypot_distance
0.05255244999046248
```

find_closest_point

`pyhelpers.geom.find_closest_point(pt, ref_pts, as_geom=True)`

Find the closest point of the given point to a list of points.

Parameters

- `pt` (`tuple or list or shapely.geometry.Point`) – (longitude, latitude)
- `ref_pts` (`Iterable or numpy.ndarray or list or tuple or shapely.geometry.Point or shapely.geometry.MultiPoint or shapely.geometry.LineString or shapely.geometry.MultiLineString or shapely.geometry.Polygon or shapely.geometry.MultiPolygon or shapely.geometry.GeometryCollection`) – a sequence of reference (tuple/list of length 2) points
- `as_geom` (`bool`) – whether to return `shapely.geometry.Point`, defaults to True

Returns

the point closest to pt

Return type

`shapely.geometry.Point` or `numpy.ndarray`

Examples:

```
>>> from pyhelpers.geom import find_closest_point
>>> from pyhelpers._cache import example_dataframe

>>> example_df = example_dataframe()
>>> example_df
   City      Longitude    Latitude
London     -0.127647  51.507322
Birmingham -1.902691  52.479699
Manchester -2.245115  53.479489
```

(continues on next page)

(continued from previous page)

```

Leeds      -1.543794  53.797418

>>> # Find the city closest to London
>>> london = example_df.loc['London'].values
>>> ref_cities = example_df.loc['Birmingham':, :].values
>>> closest_to_london = find_closest_point(pt=london, ref_pts=ref_cities)
>>> closest_to_london.wkt # Birmingham
'POINT (-1.9026911 52.4796992)'

>>> # Find the city closest to Leeds
>>> leeds = example_df.loc['Leeds'].values
>>> ref_cities = example_df.loc[:'Manchester', :].values
>>> closest_to_leeds = find_closest_point(pt=leeds, ref_pts=ref_cities)
>>> closest_to_leeds.wkt # Manchester
'POINT (-2.2451148 53.4794892)'

>>> closest_to_leeds = find_closest_point(pt=leeds, ref_pts=ref_cities, as_geom=False)
>>> closest_to_leeds # Manchester
array([-2.2451148, 53.4794892])

```

find_closest_points

`pyhelpers.geom.find_closest_points(pts, ref_pts, k=1, unique=False, as_geom=False, ret_idx=False, ret_dist=False, **kwargs)`

Find the closest points from a list of reference points (applicable for vectorized computation).

See also [GEOM-FCPB-1].

Parameters

- **pts** (`numpy.ndarray` or `list` or `tuple` or `Iterable` or `shapely.geometry.Point` or `shapely.geometry.MultiPoint` or `shapely.geometry.LineString` or `shapely.geometry.MultiLineString` or `shapely.geometry.Polygon` or `shapely.geometry.MultiPolygon` or `shapely.geometry.GeometryCollection`) – an array (of size (n, 2)) of points
- **ref_pts** (`numpy.ndarray` or `list` or `tuple` or `shapely.geometry.Point` or `shapely.geometry.MultiPoint` or `shapely.geometry.LineString` or `shapely.geometry.MultiLineString` or `shapely.geometry.Polygon` or `shapely.geometry.MultiPolygon` or `shapely.geometry.GeometryCollection`) – an array (of size (n, 2)) of reference points
- **k** (`int` or `list`) – (up to) the k-th nearest neighbour(s), defaults to 1
- **unique** (`bool`) – whether to remove duplicated points, defaults to False
- **as_geom** (`bool`) – whether to return `shapely.geometry.Point`, defaults to False

- **ret_idx (bool)** – whether to return indices of the closest points in ref_pts, defaults to False
- **ret_dist (bool)** – whether to return distances between pts and the closest points in ref_pts, defaults to False
- **kwargs** – [optional] parameters of `scipy.spatial.cKDTree`

Returns

point (or points) among the list of ref_pts, which is (or are) closest to pts

Return type

`numpy.ndarray` or `shapely.geometry.MultiPoint`

Examples:

```
>>> from pyhelpers.geom import find_closest_points
>>> from pyhelpers._cache import example_dataframe
>>> from shapely.geometry import LineString, MultiPoint

>>> example_df = example_dataframe()
>>> example_df
      Longitude   Latitude
City
London      -0.127647  51.507322
Birmingham  -1.902691  52.479699
Manchester  -2.245115  53.479489
Leeds        -1.543794  53.797418

>>> cities = [[-2.9916800, 53.4071991], # Liverpool
...             [-4.2488787, 55.8609825], # Glasgow
...             [-1.6131572, 54.9738474]] # Newcastle
>>> ref_cities = example_df.to_numpy()

>>> closest_to_each = find_closest_points(pts=cities, ref_pts=ref_cities, k=1)
>>> closest_to_each # Liverpool: Manchester; Glasgow: Manchester; Newcastle: Leeds
array([[-2.2451148, 53.4794892],
       [-2.2451148, 53.4794892],
       [-1.5437941, 53.7974185]])

>>> closest_to_each = find_closest_points(pts=cities, ref_pts=ref_cities, k=1, as_geom=True)
>>> closest_to_each.wkt
'MULTIPOINT (-2.2451148 53.4794892, -2.2451148 53.4794892, -1.5437941 53.7974185)'

>>> _, idx = find_closest_points(pts=cities, ref_pts=ref_cities, k=1, ret_idx=True)
>>> idx
array([2, 2, 3], dtype=int64)

>>> _, _, dist = find_closest_points(cities, ref_cities, k=1, ret_idx=True, ret_dist=True)
>>> dist
array([0.75005697, 3.11232712, 1.17847198])

>>> cities_geoms_1 = LineString(cities)
>>> closest_to_each = find_closest_points(pts=cities_geoms_1, ref_pts=ref_cities, k=1)
>>> closest_to_each
array([[-2.2451148, 53.4794892],
       [-2.2451148, 53.4794892],
       [-1.5437941, 53.7974185]])
```

(continues on next page)

(continued from previous page)

```
>>> cities_geoms_2 = MultiPoint(cities)
>>> closest_to_each = find_closest_points(cities_geoms_2, ref_cities, k=1, as_geom=True)
>>> closest_to_each.wkt
'MULTIPOINT (-2.2451148 53.4794892, -2.2451148 53.4794892, -1.5437941 53.7974185)'
```

find_shortest_path

`pyhelpers.geom.find_shortest_path(points_sequence, ret_dist=False, as_geom=False, **kwargs)`

Find the shortest path through a sequence of points.

Parameters

- `points_sequence` (`numpy.ndarray`) – a sequence of points
- `ret_dist` (`bool`) – whether to return the distance of the shortest path, defaults to False
- `as_geom` (`bool`) – whether to return the sorted path as a line geometry object, defaults to False
- `kwargs` – (optional) parameters used by `sklearn.neighbors.NearestNeighbors`

Returns

a sequence of sorted points given two-nearest neighbors

Return type

`numpy.ndarray` or `shapely.geometry.LineString` or tuple

Examples:

```
>>> from pyhelpers.geom import find_shortest_path
>>> from pyhelpers._cache import example_dataframe

>>> example_df = example_dataframe()
>>> example_df
   City      Longitude    Latitude
0  London     -0.127647  51.507322
1 Birmingham   -1.902691  52.479699
2 Manchester   -2.245115  53.479489
3  Leeds      -1.543794  53.797418

>>> example_df_ = example_df.sample(frac=1, random_state=1)
>>> example_df_
   City      Longitude    Latitude
0  Leeds      -1.543794  53.797418
1 Manchester   -2.245115  53.479489
2  London     -0.127647  51.507322
3 Birmingham   -1.902691  52.479699

>>> cities = example_df_.to_numpy()
>>> cities
```

(continues on next page)

(continued from previous page)

```
array([[-1.5437941, 53.7974185],
       [-2.2451148, 53.4794892],
       [-0.1276474, 51.5073219],
       [-1.9026911, 52.4796992]])

>>> cities_sorted = find_shortest_path(points_sequence=cities)
>>> cities_sorted
array([[-1.5437941, 53.7974185],
       [-2.2451148, 53.4794892],
       [-1.9026911, 52.4796992],
       [-0.1276474, 51.5073219]])
```

This example is illustrated below (see Fig. 10):

```
>>> import matplotlib.pyplot as plt
>>> import matplotlib.gridspec as mgs
>>> from pyhelpers.settings import mpl_preferences

>>> mpl_preferences(font_name='Times New Roman')

>>> fig = plt.figure(figsize=(7, 5))
>>> gs = mgs.GridSpec(1, 2, figure=fig)

>>> ax1 = fig.add_subplot(gs[:, 0])
>>> ax1.plot(cities[:, 0], cities[:, 1], label='original')
>>> for city, i, lonlat in zip(example_df_.index, range(len(cities)), cities):
...     ax1.scatter(lonlat[0], lonlat[1])
...     ax1.annotate(city + f' ({i})', xy=lonlat + 0.05)
>>> ax1.legend(loc=3)

>>> ax2 = fig.add_subplot(gs[:, 1])
>>> ax2.plot(cities_sorted[:, 0], cities_sorted[:, 1], label='sorted', color='orange')
>>> for city, i, lonlat in zip(example_df_.index[:-1], range(len(cities)), cities_sorted):
...     ax2.scatter(lonlat[0], lonlat[1])
...     ax2.annotate(city + f' ({i})', xy=lonlat + 0.05)
>>> ax2.legend(loc=3)

>>> plt.tight_layout()
>>> plt.show()
```

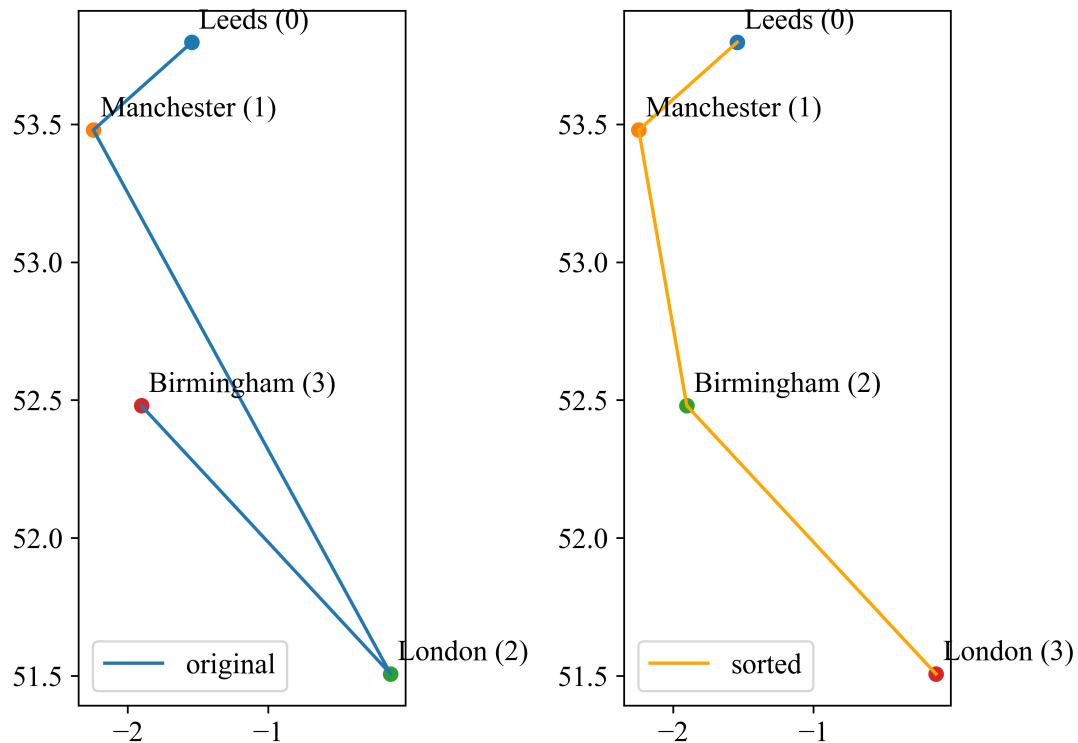


Fig. 10: An example of sorting a sequence of points given the shortest path.

Locating

<code>get_midpoint(x1, y1, x2, y2[, as_geom])</code>	Get the midpoint between two points (applicable for vectorized computation).
<code>get_geometric_midpoint(pt1, pt2[, as_geom])</code>	Get the midpoint between two points.
<code>get_geometric_midpoint_calc(pt1, pt2[, as_geom])</code>	Get the midpoint between two points by pure calculation.
<code>get_rectangle_centroid(rectangle[, as_geom])</code>	Get coordinates of the centroid of a rectangle
<code>get_square_vertices(ctr_x, ctr_y, side_length)</code>	Get the four vertices of a square given its centre and side length.
<code>get_square_vertices_calc(ctr_x, ctr_y, ...)</code>	Get the four vertices of a square given its centre and side length (by elementary calculation).

get_midpoint

`pyhelpers.geom.get_midpoint(x1, y1, x2, y2, as_geom=False)`

Get the midpoint between two points (applicable for vectorized computation).

Parameters

- `x1` (*float or int or Iterable or numpy.ndarray*) – longitude(s) or easting(s) of a point (an array of points)
- `y1` (*float or int or Iterable or numpy.ndarray*) – latitude(s) or northing(s) of a point (an array of points)
- `x2` (*float or int or Iterable or numpy.ndarray*) – longitude(s) or easting(s) of another point (another array of points)
- `y2` (*float or int or Iterable or numpy.ndarray*) – latitude(s) or northing(s) of another point (another array of points)
- `as_geom` (*bool*) – whether to return `shapely.geometry.Point`, defaults to `False`

Returns

the midpoint between (x_1, y_1) and (x_2, y_2) (or midpoints between two sequences of points)

Return type

`numpy.ndarray` or `shapely.geometry.Point` or `shapely.geometry.MultiPoint`

Examples:

```
>>> from pyhelpers.geom import get_midpoint

>>> x_1, y_1 = 1.5429, 52.6347
>>> x_2, y_2 = 1.4909, 52.6271

>>> midpt = get_midpoint(x_1, y_1, x_2, y_2)
>>> midpt
array([ 1.5169, 52.6309])

>>> midpt = get_midpoint(x_1, y_1, x_2, y_2, as_geom=True)
>>> midpt.wkt
'POINT (1.5169 52.6309)'

>>> x_1, y_1 = (1.5429, 1.4909), (52.6347, 52.6271)
>>> x_2, y_2 = [2.5429, 2.4909], [53.6347, 53.6271]

>>> midpt = get_midpoint(x_1, y_1, x_2, y_2)
>>> midpt
array([[ 2.0429, 53.1347],
       [ 1.9909, 53.1271]])

>>> midpt = get_midpoint(x_1, y_1, x_2, y_2, as_geom=True)
>>> midpt.wkt
'MULTIPOINT (2.0429 53.1347, 1.9909 53.1271)'
```

get_geometric_midpoint

`pyhelpers.geom.get_geometric_midpoint(pt1, pt2, as_geom=False)`

Get the midpoint between two points.

Parameters

- `pt1` (`shapely.geometry.Point` or `list` or `tuple` or `numpy.ndarray`)
– a point
- `pt2` (`shapely.geometry.Point` or `list` or `tuple` or `numpy.ndarray`)
– another point
- `as_geom` (`bool`) – whether to return `shapely.geometry.Point`, defaults to `False`

Returns

the midpoint between `pt1` and `pt2`

Return type

`tuple` or `shapely.geometry.Point` or `None`

Examples:

```
>>> from pyhelpers.geom import get_geometric_midpoint
>>> pt_1, pt_2 = (1.5429, 52.6347), (1.4909, 52.6271)
>>> geometric_midpoint = get_geometric_midpoint(pt_1, pt_2)
>>> geometric_midpoint
(1.5169, 52.6309)

>>> geometric_midpoint = get_geometric_midpoint(pt_1, pt_2, as_geom=True)
>>> geometric_midpoint.wkt
'POINT (1.5169 52.6309)'
```

See also:

- Examples for the function `pyhelpers.geom.get_geometric_midpoint_calc()`.

get_geometric_midpoint_calc

`pyhelpers.geom.get_geometric_midpoint_calc(pt1, pt2, as_geom=False)`

Get the midpoint between two points by pure calculation.

See also [GEOM-GGMC-1] and [GEOM-GGMC-2].

Parameters

- `pt1` (`shapely.geometry.Point` or `list` or `tuple` or `numpy.ndarray`)
– a point
- `pt2` (`shapely.geometry.Point` or `list` or `tuple` or `numpy.ndarray`)
– a point

- **as_geom** (bool) – whether to return `shapely.geometry.Point`. defaults to False

Returns

the midpoint between pt1 and pt2

Return type

tuple or `shapely.geometry.Point` or None

Examples:

```
>>> from pyhelpers.geom import get_geometric_midpoint_calc

>>> pt_1, pt_2 = (1.5429, 52.6347), (1.4909, 52.6271)

>>> geometric_midpoint = get_geometric_midpoint_calc(pt_1, pt_2)
>>> geometric_midpoint
(1.5168977420748175, 52.630902845583094)

>>> geometric_midpoint = get_geometric_midpoint_calc(pt_1, pt_2, as_geom=True)
>>> geometric_midpoint.wkt
'POINT (1.5168977420748175 52.630902845583094)'
```

See also:

- Examples for the function `pyhelpers.geom.get_geometric_midpoint()`.

get_rectangle_centroid

`pyhelpers.geom.get_rectangle_centroid(rectangle, as_geom=False)`

Get coordinates of the centroid of a rectangle

Parameters

- **rectangle** (list or tuple or `numpy.ndarray` or `shapely.geometry.Polygon` or `shapely.geometry.MultiPolygon`)
– polygon or multipolygon geometry object
- **as_geom** (bool) – whether to return a `shapely.geometry` object

Returns

coordinate of the rectangle

Return type

`numpy.ndarray` or `shapely.geometry.Point`

Examples:

```
>>> from pyhelpers.geom import get_rectangle_centroid
>>> from shapely.geometry import Polygon
>>> import numpy

>>> coords_1 = [[0, 0], [0, 1], [1, 1], [1, 0]]

>>> rect_obj = Polygon(coords_1)
```

(continues on next page)

(continued from previous page)

```
>>> rect_cen = get_rectangle_centroid(rectangle=rect_obj)
>>> rect_cen
array([0.5, 0.5])

>>> rect_obj = numpy.array(coords_1)
>>> rect_cen = get_rectangle_centroid(rectangle=rect_obj)
>>> rect_cen
array([0.5, 0.5])

>>> rect_cen = get_rectangle_centroid(rectangle=rect_obj, as_geom=True)
>>> type(rect_cen)
shapely.geometry.point.Point
>>> rect_cen.wkt
'POINT (0.5 0.5)'

>>> coords_2 = [[(0, 0), (0, 1), (1, 1), (1, 0)], [(1, 1), (1, 2), (2, 2), (2, 1)]]

>>> rect_cen = get_rectangle_centroid(rectangle=coords_2)
```

get_square_vertices

`pyhelpers.geom.get_square_vertices(ctr_x, ctr_y, side_length, rotation_theta=0)`

Get the four vertices of a square given its centre and side length.

See also [[GEOM-GSV-1](#)].

Parameters

- `ctr_x (int or float)` – x coordinate of a square centre
- `ctr_y (int or float)` – y coordinate of a square centre
- `side_length (int or float)` – side length of a square
- `rotation_theta (int or float)` – rotate (anticlockwise) the square by `rotation_theta` (in degree), defaults to 0

Returns

vertices of the square as an array([ll, ul, ur, lr])

Return type

`numpy.ndarray`

Examples:

```
>>> from pyhelpers.geom import get_square_vertices

>>> ctr_1, ctr_2 = -5.9375, 56.8125
>>> side_len = 0.125

>>> vts = get_square_vertices(ctr_1, ctr_2, side_len, rotation_theta=0)
>>> vts
array([[[-6.0, 56.75],
```

(continues on next page)

(continued from previous page)

```
[ -5.875, 56.75 ]))

>>> # Rotate the square by 30° (anticlockwise)
>>> vts = get_square_vertices(ctr_1, ctr_2, side_len, rotation_theta=30)
>>> vts
array([[-5.96037659, 56.72712341],
       [-6.02287659, 56.83537659],
       [-5.91462341, 56.89787659],
       [-5.85212341, 56.78962341]])
```

get_square_vertices_calc

`pyhelpers.geom.get_square_vertices_calc(ctr_x, ctr_y, side_length, rotation_theta=0)`

Get the four vertices of a square given its centre and side length (by elementary calculation).

See also [GEOM-GSVC-1].

Parameters

- `ctr_x (int or float)` – x coordinate of a square centre
- `ctr_y (int or float)` – y coordinate of a square centre
- `side_length (int or float)` – side length of a square
- `rotation_theta (int or float)` – rotate (anticlockwise) the square by `rotation_theta` (in degree), defaults to 0

Returns

vertices of the square as an array([ll, ul, ur, lr])

Return type

`numpy.ndarray`

Examples:

```
>>> from pyhelpers.geom import get_square_vertices_calc

>>> ctr_1, ctr_2 = -5.9375, 56.8125
>>> side_len = 0.125

>>> vts = get_square_vertices_calc(ctr_1, ctr_2, side_len, rotation_theta=0)
>>> vts
array([[-6.    , 56.75 ],
       [-6.    , 56.875],
       [-5.875, 56.875],
       [-5.875, 56.75 ]])

>>> # Rotate the square by 30° (anticlockwise)
>>> vts = get_square_vertices_calc(ctr_1, ctr_2, side_len, rotation_theta=30)
>>> vts
array([[-5.96037659, 56.72712341],
       [-6.02287659, 56.83537659],
       [-5.91462341, 56.89787659],
       [-5.85212341, 56.78962341]])
```

See also:

- Examples for the function `pyhelpers.geom.get_square_vertices()`.

3.5.3 Geometric data sketching

<code>sketch_square(ctr_x, ctr_y, side_length[, ...])</code>	Sketch a square given its centre point, four vertices and rotation angle (in degree).
--------------------------------------------------------------	---------------------------------------------------------------------------------------

`sketch_square`

```
pyhelpers.geom.sketch_square(ctr_x, ctr_y, side_length, rotation_theta=0, annotation=False,
                             annot_font_size=12, fig_size=(6.4, 4.8), ret_vertices=False, **kwargs)
```

Sketch a square given its centre point, four vertices and rotation angle (in degree).

Parameters

- `ctr_x` (`int or float`) – x coordinate of a square centre
- `ctr_y` (`int or float`) – y coordinate of a square centre
- `side_length` (`int or float`) – side length of a square
- `rotation_theta` (`int or float`) – rotate (anticlockwise) the square by `rotation_theta` (in degree), defaults to 0
- `annotation` (`bool`) – whether to annotate vertices of the square, defaults to True
- `annot_font_size` (`int`) – font size annotation texts, defaults to 12
- `fig_size` (`tuple or list`) – figure size, defaults to (6.4, 4.8)
- `ret_vertices` (`bool`) – whether to return the vertices of the square, defaults to False
- `kwargs` – [optional] parameters of `matplotlib.axes.Axes.annotate`

Returns

vertices of the square as an array([ll, ul, ur, lr])

Return type

`numpy.ndarray`

Examples:

```
>>> from pyhelpers.geom import sketch_square
>>> from pyhelpers.settings import mpl_preferences
>>> import matplotlib.pyplot as plt

>>> mpl_preferences()

>>> c1, c2 = 1, 1
```

(continues on next page)

(continued from previous page)

```
>>> side_len = 2

>>> sketch_square(c1, c2, side_len, rotation_theta=0, annotation=True, fig_size=(5, 5))
>>> plt.show()
```

The above example is illustrated in Fig. 11:

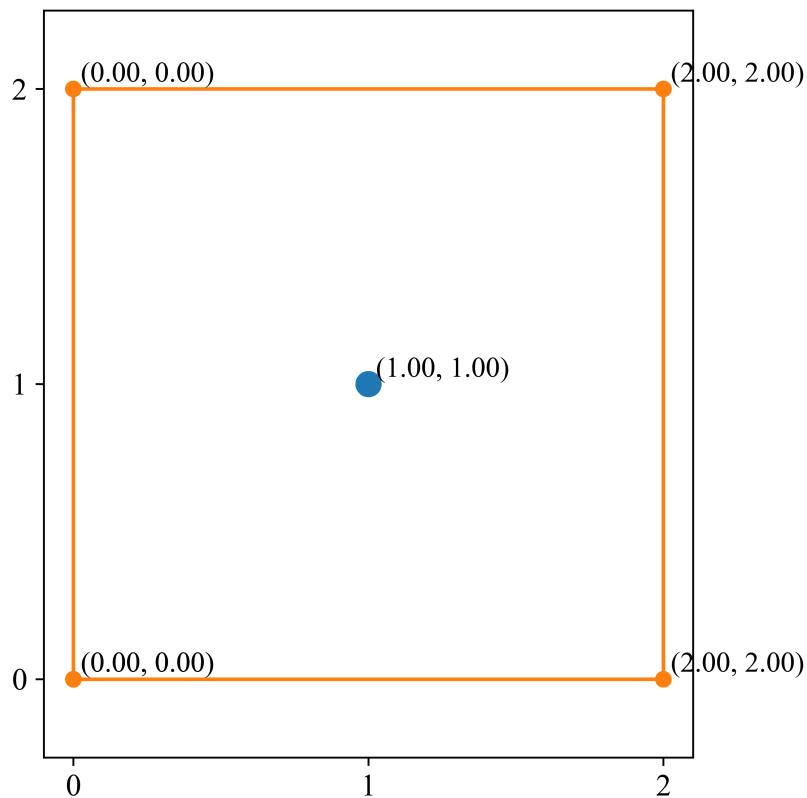


Fig. 11: An example of a sketch of a square, created by the function `sketch_square()`.

```
>>> sketch_square(c1, c2, side_len, rotation_theta=75, annotation=True, fig_size=(5, 5))
>>> plt.show()
```

This second example is illustrated in Fig. 12:

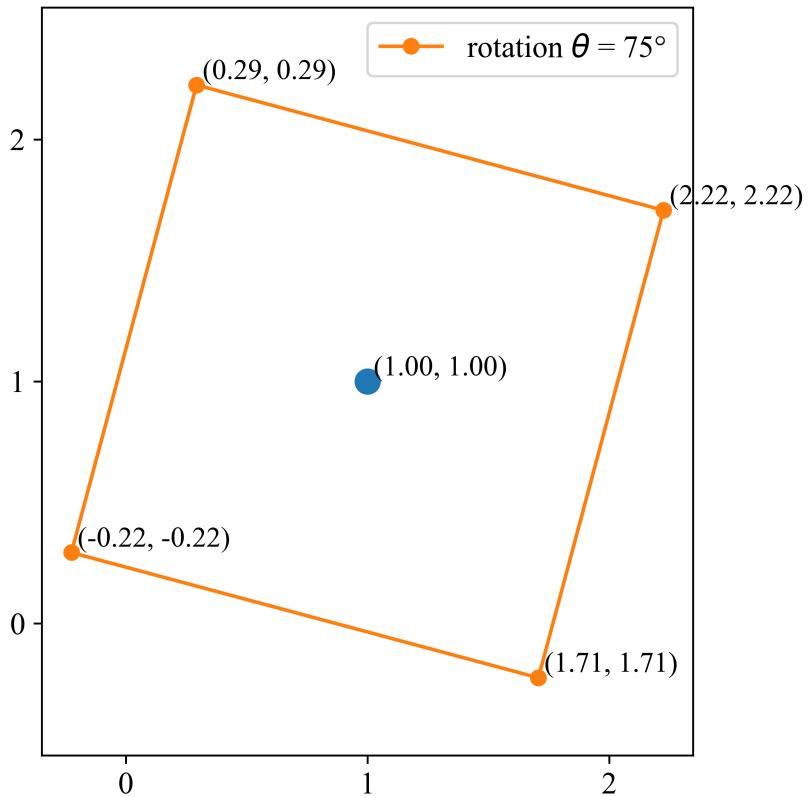


Fig. 12: An example of a sketch of a square rotated 75 degrees anticlockwise about the centre.

3.6 text

Manipulation of textual data.

3.6.1 Textual data preprocessing

<code>get_acronym(text[, only_capitals, ...])</code>	Get an acronym (in capital letters) of an input text.
<code>remove_punctuation(x[, rm_whitespace])</code>	Remove punctuation from string-type data.
<code>extract_words1upper(x[, join_with])</code>	Extract words from a string by splitting it at occurrence of an uppercase letter.
<code>numeral_english_to_arabic(x)</code>	Convert a number written in English words into its equivalent numerical value represented in Arabic numerals.

get_acronym

```
pyhelpers.text.get_acronym(text, only_capitals=False, capitals_in_words=False)
```

Get an acronym (in capital letters) of an input text.

Parameters

- **text** (*str*) – any text
- **only_capitals** (*bool*) – whether to include capital letters only, defaults to False
- **capitals_in_words** (*bool*) – whether to include all captital letters in a single word, defaults to False

Returns

acronym of the input str_var

Return type

str

Examples:

```
>>> from pyhelpers.text import get_acronym

>>> text_a = 'This is an apple.'
>>> acron = get_acronym(text_a)
>>> acron
'TIAA'

>>> text_b = "I'm at the University of Birmingham."
>>> acron = get_acronym(text_b, only_capitals=True)
>>> acron
'IUB'

>>> text_c = 'There is a "ConnectionError"!'
>>> acron = get_acronym(text_c, capitals_in_words=True)
>>> acron
'TCE'
```

remove_punctuation

```
pyhelpers.text.remove_punctuation(x, rm_whitespace=True)
```

Remove punctuation from string-type data.

Parameters

- **x** (*str*) – raw string-type data
- **rm_whitespace** (*bool*) – whether to remove whitespace (incl. escape characters), defaults to True

Returns

text with punctuation removed

Return type

str

Examples:

```
>>> from pyhelpers.text import remove_punctuation

>>> raw_text = 'Hello world!      This is a test. :-)'

>>> text = remove_punctuation(raw_text)
>>> text
'Hello world This is a test'

>>> text = remove_punctuation(raw_text, rm_whitespace=False)
>>> text
'Hello world      This is a test'
```

extract_words1upperpyhelpers.text.**extract_words1upper**(*x*, *join_with=None*)

Extract words from a string by splitting it at occurrence of an uppercase letter.

Parameters

- **x** (str) – a string joined by a number of words each starting with an uppercase letter
- **join_with** (str / None) – a string with which to (re)join the single words, defaults to None

Returnsa list of single words each starting with an uppercase letter, or a single string joined together by them with *join_with***Return type**

list | str

Examples:

```
>>> from pyhelpers.text import extract_words1upper

>>> x1 = 'Network_Waymarks'
>>> x1_ = extract_words1upper(x1)
>>> x1_
['Network', 'Waymarks']

>>> x2 = 'NetworkRailRetainingWall'
>>> x2_ = extract_words1upper(x2, join_with=' ')
>>> x2_
'Network Rail Retaining Wall'
```

numeral_english_to_arabic

```
pyhelpers.text.numeral_english_to_arabic(x)
```

Convert a number written in English words into its equivalent numerical value represented in Arabic numerals.

Parameters

`x (str)` – a number expressed in the English language

Returns

the equivalent Arabic number

Return type

`int`

Examples:

```
>>> from pyhelpers.text import numeral_english_to_arabic

>>> numeral_english_to_arabic('one')
1

>>> numeral_english_to_arabic('one hundred and one')
101

>>> numeral_english_to_arabic('a thousand two hundred and three')
1203

>>> numeral_english_to_arabic('200 and five')
205

>>> numeral_english_to_arabic('Two hundred and fivety') # Two hundred and fifty
Exception: Illegal word: "fivety"
```

3.6.2 Textual data computation

<code>count_words(raw_txt)</code>	Count the total for each different word.
<code>calculate_idf(raw_documents[, rm_punc])</code>	Calculate inverse document frequency.
<code>calculate_tf_idf(raw_documents[, rm_punc])</code>	Count term frequency–inverse document frequency.
<code>euclidean_distance_between_texts(txt1, txt2)</code>	Compute Euclidean distance of two sentences.
<code>cosine_similarity_between_texts(txt1, txt2)</code>	Calculate cosine similarity of two sentences.

count_words

`pyhelpers.text.count_words(raw_txt)`

Count the total for each different word.

Parameters

- `raw_txt (str)` – any text

Returns

- number of each word in raw_docs

Return type

- dict

Examples:

```
>>> from pyhelpers.text import count_words, remove_punctuation

>>> raw_text = 'This is an apple. That is a pear. Hello world!'

>>> count_words(raw_text)
{'This': 1,
 'is': 2,
 'an': 1,
 'apple': 1,
 '.': 2,
 'That': 1,
 'a': 1,
 'pear': 1,
 'Hello': 1,
 'world': 1,
 '!': 1}

>>> count_words(remove_punctuation(raw_text))
{'This': 1,
 'is': 2,
 'an': 1,
 'apple': 1,
 'That': 1,
 'a': 1,
 'pear': 1,
 'Hello': 1,
 'world': 1}
```

calculate_idf

`pyhelpers.text.calculate_idf(raw_documents, rm_punc=False)`

Calculate inverse document frequency.

Parameters

- `raw_documents (Iterable / Sequence)` – a sequence of textual data
- `rm_punc (bool)` – whether to remove punctuation from the input textual data, defaults to False

Returns

term frequency (TF) of the input textual data, and inverse document frequency

Return type

tuple[list[dict], dict]

Examples:

```
>>> from pyhelpers.text import calculate_idf

>>> raw_doc = [
...     'This is an apple.',
...     'That is a pear.',
...     'It is human being.',
...     'Hello world!']

>>> docs_tf_, corpus_idf_ = calculate_idf(raw_doc, rm_punc=False)
>>> docs_tf_
[{'This': 1, 'is': 1, 'an': 1, 'apple': 1, '.': 1},
 {'That': 1, 'is': 1, 'a': 1, 'pear': 1, '.': 1},
 {'It': 1, 'is': 1, 'human': 1, 'being': 1, '.': 1},
 {'Hello': 1, 'world': 1, '!': 1}]

>>> corpus_idf_
{'This': 0.6931471805599453,
 'is': 0.0,
 'an': 0.6931471805599453,
 'apple': 0.6931471805599453,
 '.': 0.0,
 'That': 0.6931471805599453,
 'a': 0.6931471805599453,
 'pear': 0.6931471805599453,
 'It': 0.6931471805599453,
 'human': 0.6931471805599453,
 'being': 0.6931471805599453,
 'Hello': 0.6931471805599453,
 'world': 0.6931471805599453,
 '!': 0.6931471805599453}

>>> docs_tf_, corpus_idf_ = calculate_idf(raw_doc, rm_punc=True)
>>> docs_tf_
[{'This': 1, 'is': 1, 'an': 1, 'apple': 1},
 {'That': 1, 'is': 1, 'a': 1, 'pear': 1},
 {'It': 1, 'is': 1, 'human': 1, 'being': 1},
 {'Hello': 1, 'world': 1}]

>>> corpus_idf_
{'This': 0.6931471805599453,
 'is': 0.0,
 'an': 0.6931471805599453,
 'apple': 0.6931471805599453,
 'That': 0.6931471805599453,
 'a': 0.6931471805599453,
 'pear': 0.6931471805599453,
 'It': 0.6931471805599453,
 'human': 0.6931471805599453,
 'being': 0.6931471805599453,
 'Hello': 0.6931471805599453,
 'world': 0.6931471805599453,
```

(continues on next page)

(continued from previous page)

```
'world': 0.6931471805599453}
```

calculate_tf_idf

`pyhelpers.text.calculate_tf_idf(raw_documents, rm_punc=False)`

Count term frequency-inverse document frequency.

Parameters

- **raw_documents** (`Iterable / Sequence`) – a sequence of textual data
- **rm_punc** (`bool`) – whether to remove punctuation from the input textual data, defaults to `False`

Returns

TF-IDF of the input textual data.

Return type

`dict`

Examples:

```
>>> from pyhelpers.text import calculate_tf_idf

>>> raw_doc = [
...     'This is an apple.',
...     'That is a pear.',
...     'It is human being.',
...     'Hello world!']

>>> docs_tf_idf_ = calculate_tf_idf(raw_documents=raw_doc)
>>> docs_tf_idf_
{'This': 0.6931471805599453,
 'is': 0.0,
 'an': 0.6931471805599453,
 'apple': 0.6931471805599453,
 '.': 0.0,
 'That': 0.6931471805599453,
 'a': 0.6931471805599453,
 'pear': 0.6931471805599453,
 'It': 0.6931471805599453,
 'human': 0.6931471805599453,
 'being': 0.6931471805599453,
 'Hello': 0.6931471805599453,
 'world': 0.6931471805599453,
 '!': 0.6931471805599453}

>>> docs_tf_idf_ = calculate_tf_idf(raw_documents=raw_doc, rm_punc=True)
>>> docs_tf_idf_
{'This': 0.6931471805599453,
 'is': 0.0,
 'an': 0.6931471805599453,
 'apple': 0.6931471805599453,
 'That': 0.6931471805599453,
```

(continues on next page)

(continued from previous page)

```
'a': 0.6931471805599453,
'pear': 0.6931471805599453,
'It': 0.6931471805599453,
'human': 0.6931471805599453,
'being': 0.6931471805599453,
'Hello': 0.6931471805599453,
'world': 0.6931471805599453}
```

euclidean_distance_between_texts

```
pyhelpers.text.euclidean_distance_between_texts(txt1, txt2)
```

Compute Euclidean distance of two sentences.

Parameters

- `txt1 (str)` – any text
- `txt2 (str)` – any text

Returns

Euclidean distance between the input textual data

Return type

float

Examples:

```
>>> from pyhelpers.text import euclidean_distance_between_texts

>>> txt_1, txt_2 = 'This is an apple.', 'That is a pear.'

>>> euclidean_distance = euclidean_distance_between_texts(txt_1, txt_2)
>>> euclidean_distance
2.449489742783178
```

cosine_similarity_between_texts

```
pyhelpers.text.cosine_similarity_between_texts(txt1, txt2, cosine_distance=False)
```

Calculate cosine similarity of two sentences.

Parameters

- `txt1 (str)` – any text
- `txt2 (str)` – any text
- `cosine_distance (bool)` – whether to get cosine distance, which is (1 - cosine similarity), defaults to False

Returns

cosine similarity (or distance)

Return type

float

Examples:

```
>>> from pyhelpers.text import cosine_similarity_between_texts

>>> txt_1, txt_2 = 'This is an apple.', 'That is a pear.'

>>> cos_sim = cosine_similarity_between_texts(txt_1, txt_2)
>>> cos_sim
0.25

>>> cos_dist = cosine_similarity_between_texts(txt_1, txt_2, cosine_distance=True)
>>> cos_dist # 1 - cos_sim
0.75
```

3.6.3 Textual data comparison

<code>find_matched_str(x, lookup_list)</code>	Find all that are matched with a string from among a sequence of strings.
<code>find_similar_str(x, lookup_list[, n, ...])</code>	Find n strings that are similar to x from among a sequence of candidates.

`find_matched_str`

`pyhelpers.text.find_matched_str(x, lookup_list)`

Find all that are matched with a string from among a sequence of strings.

Parameters

- `x (str)` – a string-type variable
- `lookup_list (Iterable)` – a sequence of strings for lookup

Returns

a generator containing all that are matched with x

Return type

Generator | None

Examples:

```
>>> from pyhelpers.text import find_matched_str

>>> lookup_lst = ['abc', 'aapl', 'app', 'ap', 'ape', 'apex', 'apel']
>>> res = find_matched_str('apple', lookup_lst)
>>> list(res)
[]

>>> lookup_lst += ['apple']
>>> lookup_lst
['abc', 'aapl', 'app', 'ap', 'ape', 'apex', 'apel', 'apple']

>>> res = find_matched_str('apple', lookup_lst)
```

(continues on next page)

(continued from previous page)

```
>>> list(res)
['apple']

>>> res = find_matched_str(r'app(le)?', lookup_lst)
>>> list(res)
['app', 'apple']
```

find_similar_str

`pyhelpers.text.find_similar_str(x, lookup_list, n=1, ignore_punctuation=True, engine='difflib', **kwargs)`

Find n strings that are similar to x from among a sequence of candidates.

Parameters

- `x (str)` – a string-type variable
- `lookup_list (Iterable)` – a sequence of strings for lookup
- `n (int / None)` – number of similar strings to return, defaults to 1; when `n=None`, the function returns a sorted `lookup_list` (in the descending order of similarity)
- `ignore_punctuation (bool)` – whether to ignore punctuations in the search for similar texts, defaults to True
- `engine (str / Callable)` – options include 'difflib' (default) and 'rapidfuzz' (or simply 'fuzz')
 - if `engine='difflib'`, the function relies on `difflib.get_close_matches`
 - if `engine='rapidfuzz'` (or `engine='fuzz'`), the function relies on `rapidfuzz.fuzz.QRatio`
- `kwargs` – [optional] parameters of `difflib.get_close_matches` (e.g. `cutoff=0.6`) or `rapidfuzz.fuzz.QRatio`, depending on engine

Returns

a string-type variable that should be similar to (or the same as) x

Return type

`str | list | None`

Note:

- By default, the function uses the built-in module `difflib`; when we set the parameter `engine='rapidfuzz'` (or `engine='fuzz'`), the function then relies on `RapidFuzz`, which is not an essential dependency for installing `pyhelpers`. We could however use pip (or conda) to install it first separately.

Examples:

```

>>> from pyhelpers.text import find_similar_str

>>> lookup_lst = ['Anglia',
...                 'East Coast',
...                 'East Midlands',
...                 'North and East',
...                 'London North Western',
...                 'Scotland',
...                 'South East',
...                 'Wales',
...                 'Wessex',
...                 'Western']

>>> y = find_similar_str(x='angle', lookup_list=lookup_lst)
>>> y
'Anglia'
>>> y = find_similar_str(x='angle', lookup_list=lookup_lst, n=2)
>>> y
['Anglia', 'Wales']

>>> y = find_similar_str(x='angle', lookup_list=lookup_lst, engine='fuzz')
>>> y
'Anglia'
>>> y = find_similar_str('angle', lookup_lst, n=2, engine='fuzz')
>>> y
['Anglia', 'Wales']

>>> y = find_similar_str(x='x', lookup_list=lookup_lst)
>>> y is None
True
>>> y = find_similar_str(x='x', lookup_list=lookup_lst, cutoff=0.25)
>>> y
'Wessex'
>>> y = find_similar_str(x='x', lookup_list=lookup_lst, n=2, cutoff=0.25)
>>> y
'Wessex'

>>> y = find_similar_str(x='x', lookup_list=lookup_lst, engine='fuzz')
>>> y
'Wessex'
>>> y = find_similar_str(x='x', lookup_list=lookup_lst, n=2, engine='fuzz')
>>> y
['Wessex', 'Western']

```

3.7 dbms

Communication with databases.

The current release includes classes for PostgreSQL and Microsoft SQL Server.

3.7.1 Databases

<code>PostgreSQL([host, port, username, password, ...])</code>	A class for basic communication with PostgreSQL databases.
<code>MSSQL([host, port, username, password, ...])</code>	A class for basic communication with Microsoft SQL Server databases.

PostgreSQL

```
class pyhelpers.dbms.PostgreSQL(host=None, port=None, username=None, password=None,
                                 database_name=None, confirm_db_creation=False, verbose=True)
```

A class for basic communication with PostgreSQL databases.

Parameters

- **host** (*str or None*) – host name/address of a PostgreSQL server, e.g. 'localhost' or '127.0.0.1' (default by installation of PostgreSQL); when host=None (default), it is initialized as 'localhost'
- **port** (*int or None*) – listening port used by PostgreSQL; when port=None (default), it is initialized as 5432 (default by installation of PostgreSQL)
- **username** (*str or None*) – username of a PostgreSQL server; when username=None (default), it is initialized as 'postgres' (default by installation of PostgreSQL)
- **password** (*str or int or None*) – user password; when password=None (default), it is required to manually type in the correct password to connect the PostgreSQL server
- **database_name** (*str or None*) – name of a database; when database=None (default), it is initialized as 'postgres' (default by installation of PostgreSQL)
- **confirm_db_creation** (*bool*) – whether to prompt a confirmation before creating a new database (if the specified database does not exist), defaults to False
- **verbose** (*bool or int*) – whether to print relevant information in console, defaults to True

Variables

- **host** (*str*) – host name/address
- **port** (*str*) – listening port used by PostgreSQL
- **username** (*str*) – username
- **database_name** (*str*) – name of a database
- **credentials** (*dict*) – basic information about the server/database being connected

- **address** (*str*) – representation of the database address
- **engine** (*sqlalchemy.engine.Engine*) – **SQLAlchemy** connectable engine to a PostgreSQL server; see also [DBMS-PS-2]

Examples:

```
>>> from pyhelpers.dbms import PostgreSQL

>>> # Connect the default database 'postgres'
>>> # postgres = PostgreSQL('localhost', 5432, 'postgres', database_name='postgres')
>>> postgres = PostgreSQL()
Password (postgres@localhost:5432): ***
Connecting postgres:**@localhost:5432/postgres ... Successfully.

>>> postgres.address
'postgres:**@localhost:5432/postgres'

>>> # Connect a database 'testdb' (which will be created if it does not exist)
>>> testdb = PostgreSQL(database_name='testdb')
Password (postgres@localhost:5432): ***
Creating a database: "testdb" ... Done.
Connecting postgres:**@localhost:5432/testdb ... Successfully.

>>> testdb.address
'postgres:**@localhost:5432/testdb'

>>> testdb.drop_database(verbose=True)
To drop the database "testdb" from postgres:**@localhost:5432
? [No]|Yes: yes
Dropping "testdb" ... Done.

>>> testdb.address
'postgres:**@localhost:5432/postgres'
```

Define a proxy object that inherits from this class:

```
>>> class ExampleProxyObj(PostgreSQL):
...     def __init__(self, **kwargs):
...         super().__init__(**kwargs)

>>> example_proxy = ExampleProxyObj(database_name='testdb')
Password (postgres@localhost:5432): ***
Creating a database: "testdb" ... Done.
Connecting postgres:**@localhost:5432/testdb ... Successfully.

>>> example_proxy.address
'postgres:**@localhost:5432/testdb'
>>> example_proxy.database_name
'testdb'

>>> example_proxy.drop_database(verbose=True)
To drop the database "testdb" from postgres:**@localhost:5432
? [No]|Yes: yes
Dropping "testdb" ... Done.

>>> example_proxy.database_name
'postgres'
```

Attributes

<code>DEFAULT_DATABASE</code>	Name of the database that is by default to connect with.
<code>DEFAULT_DIALECT</code>	Default dialect.
<code>DEFAULT_DRIVER</code>	Default name of database driver.
<code>DEFAULT_HOST</code>	Default host name/address (by installation of PostgreSQL).
<code>DEFAULT_PORT</code>	Default listening port used by PostgreSQL.
<code>DEFAULT_SCHEMA</code>	Name of the schema that is created by default for the installation of PostgreSQL.
<code>DEFAULT_USERNAME</code>	Default username.

PostgreSQL.DEFAULT_DATABASE

`PostgreSQL.DEFAULT_DATABASE = 'postgres'`

Name of the database that is by default to connect with. The database is created by installation of PostgreSQL.

PostgreSQL.DEFAULT_DIALECT

`PostgreSQL.DEFAULT_DIALECT = 'postgresql'`

Default dialect. The dialect that SQLAlchemy uses to communicate with PostgreSQL; see also [DBMS-PS-1]

PostgreSQL.DEFAULT_DRIVER

`PostgreSQL.DEFAULT_DRIVER = 'psycopg2'`

Default name of database driver.

PostgreSQL.DEFAULT_HOST

`PostgreSQL.DEFAULT_HOST = 'localhost'`

Default host name/address (by installation of PostgreSQL).

PostgreSQL.DEFAULT_PORT

```
PostgreSQL.DEFAULT_PORT = 5432
```

Default listening port used by PostgreSQL.

PostgreSQL.DEFAULT_SCHEMA

```
PostgreSQL.DEFAULT_SCHEMA = 'public'
```

Name of the schema that is created by default for the installation of PostgreSQL.

PostgreSQL.DEFAULT_USERNAME

```
PostgreSQL.DEFAULT_USERNAME = 'postgres'
```

Default username.

Methods

<code>add_primary_keys(primary_keys, table_name[, ...])</code>	Add a primary key or multiple primary keys to a table.
<code>alter_table_schema(table_name, schema_name, ...)</code>	Move a table from one schema to another within the currently-connected database.
<code>connect_database([database_name, verbose])</code>	Establish a connection to a database.
<code>create_database(database_name[, verbose])</code>	Create a database.
<code>create_schema(schema_name[, verbose])</code>	Create a schema.
<code>create_table(table_name, column_specs[, ...])</code>	Create a table.
<code>database_exists([database_name])</code>	Check whether a database exists.
<code>disconnect_all_others()</code>	Kill connections to all databases except the currently-connected one.
<code>disconnect_database([database_name, verbose])</code>	Disconnect a database.
<code>drop_database([database_name, ...])</code>	Delete/drop a database.
<code>drop_schema(schema_names[, ...])</code>	Delete/drop one or multiple schemas.
<code>drop_table(table_name[, schema_name, ...])</code>	Delete/drop a table.
<code>get_column_dtype(table_name[, column_names, ...])</code>	Get information about data types of all or specific columns of a table.
<code>get_column_info(table_name[, schema_name, ...])</code>	Get information about columns of a table.
<code>get_database_names([names_only])</code>	Get names of all existing databases.
<code>get_database_size([database_name])</code>	Get the size of a database.
<code>get_primary_keys(table_name[, schema_name, ...])</code>	Get the primary keys of a table.
<code>get_schema_names([include_all, names_only, ...])</code>	Get the names of existing schemas.
<code>get_table_names([schema_name, verbose])</code>	Get the names of all tables in a schema.
<code>import_data(data, table_name[, schema_name, ...])</code>	Import tabular data into a table.
<code>null_text_to_empty_string(table_name[, ...])</code>	Convert null values (in text columns) to empty strings.
<code>pgsql_insert_copy(sql_table, sql_db_engine, ...)</code>	A callable using PostgreSQL COPY clause for executing inserting data.
<code>read_sql_query(sql_query[, method, ...])</code>	Read table data by SQL query (recommended for large table).
<code>read_table(table_name[, schema_name, ...])</code>	Read data from a table.
<code>schema_exists(schema_name)</code>	Check whether a schema exists.
<code>table_exists(table_name[, schema_name])</code>	Check whether a table exists.

PostgreSQL.add_primary_keys

`PostgreSQL.add_primary_keys(primary_keys, table_name, schema_name=None)`

Add a primary key or multiple primary keys to a table.

Parameters

- `primary_keys` (`str` or `list` or `None`) – (list of) primary key(s)
- `table_name` (`str`) – name of a table
- `schema_name` (`str` or `None`) – name of a schema, defaults to None

See also:

- Examples for the method `get_primary_keys()`.

PostgreSQL.alter_table_schema

`PostgreSQL.alter_table_schema(table_name, schema_name, new_schema_name, confirmation_required=True, verbose=False)`

Move a table from one schema to another within the currently-connected database.

Parameters

- `table_name` (`str`) – name of a table
- `schema_name` (`str`) – name of a schema
- `new_schema_name` – name of a new schema
- `confirmation_required` (`bool`) – whether to prompt a message for confirmation to proceed, defaults to True
- `verbose` (`bool` or `int`) – whether to print relevant information in console, defaults to False

Examples:

```
>>> from pyhelpers.dbms import PostgreSQL

>>> testdb = PostgreSQL('localhost', 5432, 'postgres', database_name='testdb')
Password (postgres@localhost:5432): ***
Creating a database: "testdb" ... Done.
Connecting postgres:**@localhost:5432/testdb ... Successfully.

>>> # Create a new table named "test_table" in the schema "testdb"
>>> new_tbl_name = 'test_table'
>>> col_spec = 'col_name_1 INT, col_name_2 TEXT'
>>> testdb.create_table(table_name=new_tbl_name, column_specs=col_spec, verbose=True)
Creating a table: "public"."test_table" ... Done.

>>> # Create a new schema "test_schema"
>>> testdb.create_schema(schema_name='test_schema', verbose=True)
Creating a schema: "test_schema" ... Done.
```

(continues on next page)

(continued from previous page)

```
>>> # Move the table "public"."test_table" to the schema "test_schema"
>>> testdb.alter_table_schema(
...     table_name='test_table', schema_name='public', new_schema_name='test_schema',
...     verbose=True)
To move the table "test_table" from the schema "public" to "test_schema"
? [No] |Yes: yes
Moving "public"."test_table" to "test_schema" ... Done.

>>> lst_tbl_names = testdb.get_table_names(schema_name='test_schema')
>>> lst_tbl_names
['test_table']

>>> # Delete the database "testdb"
>>> testdb.drop_database(verbose=True)
To drop the database "testdb" from postgres:***@localhost:5432
? [No] |Yes: yes
Dropping "testdb" ... Done.
```

PostgreSQL.connect_database

`PostgreSQL.connect_database(database_name=None, verbose=False)`

Establish a connection to a database.

Parameters

- `database_name` (`str or None`) – name of a database; when `database_name=None` (default), the database name is input manually
- `verbose` (`bool or int`) – whether to print relevant information in console as the function runs, defaults to False

Examples:

```
>>> from pyhelpers.dbms import PostgreSQL

>>> testdb = PostgreSQL('localhost', 5432, 'postgres', database_name='testdb')
Password (postgres@localhost:5432): ***
Creating a database: "testdb" ... Done.
Connecting postgres:***@localhost:5432/testdb ... Successfully.

>>> testdb.connect_database(verbose=True)
Being connected with postgres:***@localhost:5432/testdb.

>>> testdb.connect_database(database_name='postgres', verbose=True)
Connecting postgres:***@localhost:5432/postgres ... Successfully.
>>> testdb.database_name
'postgres'

>>> testdb.connect_database(database_name='testdb', verbose=True)
Connecting postgres:***@localhost:5432/testdb ... Successfully.
>>> testdb.database_name
'testdb'
```

(continues on next page)

(continued from previous page)

```
>>> testdb.drop_database(verbose=True) # Delete the database "testdb"
To drop the database "testdb" from postgres:***@localhost:5432
? [No]|Yes: yes
Dropping "testdb" ... Done.
>>> testdb.database_name
'postgres'
```

PostgreSQL.create_database

`PostgreSQL.create_database(database_name, verbose=False)`

Create a database.

Parameters

- `database_name` (`str`) – name of a database
- `verbose` (`bool` or `int`) – whether to print relevant information in console, defaults to `False`

Examples:

```
>>> from pyhelpers.dbms import PostgreSQL

>>> testdb = PostgreSQL('localhost', 5432, 'postgres', database_name='testdb')
Password (postgres@localhost:5432): ***
Creating a database: "testdb" ... Done.
Connecting postgres:***@localhost:5432/testdb ... Successfully.
>>> testdb.database_name
'testdb'

>>> testdb.create_database(database_name='testdb1', verbose=True)
Creating a database: "testdb1" ... Done.
>>> testdb.database_name
'testdb1'

>>> # Delete the database "testdb1"
>>> testdb.drop_database(verbose=True)
To drop the database "testdb1" from postgres:***@localhost:5432
? [No]|Yes: yes
Dropping "testdb1" ... Done.
>>> testdb.database_name
'postgres'

>>> # Delete the database "testdb"
>>> testdb.drop_database(database_name='testdb', verbose=True)
To drop the database "testdb" from postgres:***@localhost:5432
? [No]|Yes: yes
Dropping "testdb" ... Done.
>>> testdb.database_name
'postgres'
```

PostgreSQL.create_schema

`PostgreSQL.create_schema(schema_name, verbose=False)`

Create a schema.

Parameters

- `schema_name (str)` – name of a schema
- `verbose (bool or int)` – whether to print relevant information in console as the function runs, defaults to False

Examples:

```
>>> from pyhelpers.dbms import PostgreSQL

>>> testdb = PostgreSQL('localhost', 5432, 'postgres', database_name='testdb')
Password (postgres@localhost:5432): ***
Creating a database: "testdb" ... Done.
Connecting postgres:**@localhost:5432/testdb ... Successfully.

>>> test_schema_name = 'test_schema'

>>> testdb.create_schema(schema_name=test_schema_name, verbose=True)
Creating a schema: "test_schema" ... Done.

>>> testdb.schema_exists(schema_name=test_schema_name)
True

>>> testdb.drop_database(verbose=True) # Delete the database "testdb"
To drop the database "testdb" from postgres:**@localhost:5432
? [No] |Yes: yes
Dropping "testdb" ... Done.
```

PostgreSQL.create_table

`PostgreSQL.create_table(table_name, column_specs, schema_name=None, verbose=False)`

Create a table.

Parameters

- `table_name (str)` – name of a table
- `column_specs (str)` – specifications for each column of the table
- `schema_name (str or None)` – name of a schema; when `schema_name=None` (default), it defaults to `DEFAULT_SCHEMA` (i.e. 'public')
- `verbose (bool or int)` – whether to print relevant information in console as the function runs, defaults to False

Examples:

```
>>> from pyhelpers.dbms import PostgreSQL

>>> testdb = PostgreSQL('localhost', 5432, 'postgres', database_name='testdb')
Password (postgres@localhost:5432): ***
Creating a database: "testdb" ... Done.
Connecting postgres:**@localhost:5432/testdb ... Successfully.

>>> tbl_name = 'test_table'
>>> col_spec = 'col_name_1 INT, col_name_2 TEXT'

>>> testdb.create_table(table_name=tbl_name, column_specs=col_spec, verbose=True)
Creating a table "public"."test_table" ... Done.

>>> testdb.table_exists(table_name=tbl_name)
True

>>> # Get information about all columns of the table "public"."test_table"
>>> test_tbl_col_info = testdb.get_column_info(table_name=tbl_name, as_dict=False)
>>> test_tbl_col_info
      column_0      column_1
table_catalog      testdb      testdb
table_schema        public      public
table_name         test_table  test_table
column_name       col_name_1  col_name_2
ordinal_position          1          2
column_default      None      None
is_nullable           YES      YES
data_type            integer   text
character_maximum_length    None      None
character_octet_length      NaN     1073741824.0
numeric_precision        32.0     NaN
numeric_precision_radix      2.0      NaN
numeric_scale           0.0      NaN
datetime_precision      None      None
interval_type           None      None
interval_precision      None      None
character_set_catalog    None      None
character_set_schema     None      None
character_set_name       None      None
collation_catalog       None      None
collation_schema        None      None
collation_name           None      None
domain_catalog          None      None
domain_schema           None      None
domain_name             None      None
udt_catalog            testdb      testdb
udt_schema             pg_catalog pg_catalog
udt_name               int4      text
scope_catalog          None      None
scope_schema            None      None
scope_name              None      None
maximum_cardinality      None      None
dtd_identifier           1          2
is_self_referencing      NO        NO
is_identity              NO        NO
identity_generation      None      None
identity_start            None      None
```

(continues on next page)

(continued from previous page)

identity_increment	None	None
identity_maximum	None	None
identity_minimum	None	None
identity_cycle	NO	NO
is_generated	NEVER	NEVER
generation_expression	None	None
is_updatable	YES	YES

```
>>> # Get data types of all columns of the table "public"."test_table"
>>> test_tbl_dtypes = testdb.get_column_dtype(table_name=tbl_name)
>>> test_tbl_dtypes
{'col_name_1': 'integer', 'col_name_2': 'text'}
```

```
>>> # Drop the table "public"."test_table"
>>> testdb.drop_table(table_name=tbl_name, verbose=True)
To drop the table "public"."test_table" from postgres:***@localhost:5432/testdb
? [No] |Yes: yes
Dropping "public"."test_table" ... Done.
```

```
>>> # Delete the database "testdb"
>>> testdb.drop_database(verbose=True)
To drop the database "testdb" from postgres:***@localhost:5432
? [No] |Yes: yes
Dropping "testdb" ... Done.
```

PostgreSQL.database_exists

`PostgreSQL.database_exists(database_name=None)`

Check whether a database exists.

Parameters

`database_name (str or None)` – name of a database, defaults to None

Returns

whether the database exists

Return type

`bool`

Examples:

```
>>> from pyhelpers.dbms import PostgreSQL

>>> testdb = PostgreSQL('localhost', 5432, 'postgres', database_name='testdb')
Password (postgres@localhost:5432): ***
Creating a database: "testdb" ... Done.
Connecting postgres:***@localhost:5432/testdb ... Successfully.

>>> # Check whether the database "testdb" exists now
>>> testdb.database_exists(database_name='testdb') # testdb.database_exists()
True
>>> testdb.database_name
'testdb'
```

(continues on next page)

(continued from previous page)

```
>>> # Delete the database "testdb"
>>> testdb.drop_database(verbose=True)
To drop the database "testdb" from postgres:***@localhost:5432
? [No] |Yes: yes
Dropping "testdb" ... Done.

>>> # Check again whether the database "testdb" still exists now
>>> testdb.database_exists(database_name='testdb')
False
>>> testdb.database_name
'postgres'
```

PostgreSQL.disconnect_all_others

`PostgreSQL.disconnect_all_others()`

Kill connections to all databases except the currently-connected one.

Examples:

```
>>> from pyhelpers.dbms import PostgreSQL

>>> testdb = PostgreSQL('localhost', 5432, 'postgres', database_name='testdb')
Password (postgres@localhost:5432): ***
Creating a database: "testdb" ... Done.
Connecting postgres:***@localhost:5432/testdb ... Successfully.

>>> testdb.database_name
'testdb'

>>> testdb.disconnect_all_others()
>>> testdb.database_name
'testdb'

>>> testdb.drop_database(verbose=True) # Delete the database "testdb"
To drop the database "testdb" from postgres:***@localhost:5432
? [No] |Yes: yes
Dropping "testdb" ... Done.
```

PostgreSQL.disconnect_database

`PostgreSQL.disconnect_database(database_name=None, verbose=False)`

Disconnect a database.

See also [[DBMS-PS-DD-1](#)].

Parameters

- `database_name (str or None)` – name of database to disconnect from; if `database_name=None` (default), disconnect the current database.
- `verbose (bool or int)` – whether to print relevant information in console as the function runs, defaults to False

Examples:

```
>>> from pyhelpers.dbms import PostgreSQL

>>> testdb = PostgreSQL('localhost', 5432, 'postgres', database_name='testdb')
Creating a database: "testdb" ... Done.
Password (postgres@localhost:5432): ***
Connecting postgres:***@localhost:5432/testdb ... Successfully.

>>> testdb.database_name
'testdb'

>>> testdb.disconnect_database()
>>> testdb.database_name
'postgres'

>>> # Delete the database "testdb"
>>> testdb.drop_database(database_name='testdb', verbose=True)
To drop the database "testdb" from postgres:***@localhost:5432
? [No] |Yes: yes
Dropping "testdb" ... Done.
```

PostgreSQL.drop_database

`PostgreSQL.drop_database(database_name=None, confirmation_required=True, verbose=False)`

Delete/drop a database.

Parameters

- `database_name (str or None)` – database to be disconnected; if `database_name=None` (default), drop the database being currently currented
- `confirmation_required (bool)` – whether to prompt a message for confirmation to proceed, defaults to True
- `verbose (bool or int)` – whether to print relevant information in console as the function runs, defaults to False

Examples:

```
>>> from pyhelpers.dbms import PostgreSQL

>>> testdb = PostgreSQL('localhost', 5432, 'postgres', database_name='testdb')
Password (postgres@localhost:5432): ***
Connecting postgres:***@localhost:5432/testdb ... Successfully.
>>> testdb.database_name
'testdb'

>>> testdb.drop_database(verbose=True) # Delete the database "testdb"
To drop the database "testdb" from postgres:***@localhost:5432
? [No] |Yes: yes
Dropping "testdb" ... Done.

>>> testdb.database_exists(database_name='testdb')
```

(continues on next page)

(continued from previous page)

```

False
>>> testdb.drop_database(database_name='testdb', verbose=True)
The database "testdb" does not exist.
>>> testdb.database_name
'postgres'

```

PostgreSQL.drop_schema

`PostgreSQL.drop_schema(schema_names, confirmation_required=True, verbose=False)`

Delete/drop one or multiple schemas.

Parameters

- `schema_names (str / Iterable [str])` – name of one schema, or names of multiple schemas
- `confirmation_required (bool)` – whether to prompt a message for confirmation to proceed, defaults to True
- `verbose (bool / int)` – whether to print relevant information in console as the function runs, defaults to False

Examples:

```

>>> from pyhelpers.dbms import PostgreSQL

>>> testdb = PostgreSQL('localhost', 5432, 'postgres', database_name='testdb')
Password (postgres@localhost:5432): ***
Creating a database: "testdb" ... Done.
Connecting postgres:**@localhost:5432/testdb ... Successfully.

>>> new_schema_names = ['points', 'lines', 'polygons']
>>> for new_schema in new_schema_names:
...     testdb.create_schema(new_schema, verbose=True)
Creating a schema: "points" ... Done.
Creating a schema: "lines" ... Done.
Creating a schema: "polygons" ... Done.

>>> new_schema_names_ = ['test_schema']
>>> testdb.drop_schema(new_schema_names + new_schema_names_, verbose=True)
To drop the following schemas from postgres:**@localhost:5432/testdb:
    "points"
    "lines"
    "polygons"
    "test_schema"
? [No]|Yes: yes
Dropping ...
    "points" ... Done.
    "lines" ... Done.
    "polygons" ... Done.
    "test_schema" (does not exist.)

>>> testdb.drop_database(verbose=True) # Delete the database "testdb"
To drop the database "testdb" from postgres:**@localhost:5432

```

(continues on next page)

(continued from previous page)

```
? [No] |Yes: yes
Dropping "testdb" ... Done.
```

PostgreSQL.drop_table

`PostgreSQL.drop_table(table_name, schema_name=None, confirmation_required=True, verbose=False)`

Delete/drop a table.

Parameters

- `table_name` (`str`) – name of a table
- `schema_name` (`str or None`) – name of a schema; when `schema_name=None` (default), it defaults to `DEFAULT_SCHEMA` (i.e. `'public'`)
- `confirmation_required` (`bool`) – whether to prompt a message for confirmation to proceed, defaults to `True`
- `verbose` (`bool or int`) – whether to print relevant information in console, defaults to `False`

See also:

- Examples for the method `create_table()`.

PostgreSQL.get_column_dtype

`PostgreSQL.get_column_dtype(table_name, column_names=None, schema_name=None)`

Get information about data types of all or specific columns of a table.

Parameters

- `table_name` (`str`) – name of a table
- `column_names` (`str or list or None`) – (list of) column name(s); when `column_names=None` (default), all available columns are included
- `schema_name` – name of a schema; when `schema_name=None` (default), it defaults to `DEFAULT_SCHEMA` (i.e. `'public'`)

Returns

data types of all or specific columns of a table

Return type

`dict` or `None`

See also:

- Examples for the method `create_table()`.

PostgreSQL.get_column_info

`PostgreSQL.get_column_info(table_name, schema_name=None, as_dict=True)`

Get information about columns of a table.

Parameters

- `table_name` (`str`) – name of a table
- `schema_name` (`str or None`) – name of a schema; when `schema_name=None` (default), it defaults to `DEFAULT_SCHEMA` (i.e. `'public'`)
- `as_dict` (`bool`) – whether to return the column information as a dictionary, defaults to `True`

Returns

information about all columns of the given table

Return type

`pandas.DataFrame` or `dict`

See also:

- Examples for the method `create_table()`.

PostgreSQL.get_database_names

`PostgreSQL.get_database_names(names_only=True)`

Get names of all existing databases.

Parameters

`names_only` (`bool`) – whether to return only the names of the databases, defaults to `True`

Returns

names of all existing databases

Return type

list or `pandas.DataFrame`

Examples:

```
>>> from pyhelpers.dbms import PostgreSQL

>>> # Connect the default database 'postgres'
>>> # postgres = PostgreSQL('localhost', 5432, 'postgres', database_name='postgres')
>>> postgres = PostgreSQL()
Password (postgres@localhost:5432): ***
Connecting postgres:***@localhost:5432/postgres ... Successfully.

>>> isinstance(postgres.get_database_names(), list)
True
```

(continues on next page)

(continued from previous page)

```
>>> 'postgres' in postgres.get_database_names()
True
```

PostgreSQL.get_database_size

`PostgreSQL.get_database_size(database_name=None)`

Get the size of a database.

Parameters

`database_name (str or None)` – name of a database; if `database_name=None` (default), the function returns the size of the currently-connected database

Returns

size of the database

Return type

`int`

Examples:

```
>>> from pyhelpers.dbms import PostgreSQL

>>> testdb = PostgreSQL('localhost', 5432, 'postgres', database_name='testdb')
Password (postgres@localhost:5432): ***
Creating a database: "testdb" ... Done.
Connecting postgres:**@localhost:5432/testdb ... Successfully.
>>> testdb.get_database_size()
'8553 kB'

>>> testdb.DEFAULT_DATABASE
'postgres'
>>> testdb.get_database_size(database_name=testdb.DEFAULT_DATABASE)
'8577 kB'

>>> testdb.drop_database(verbose=True) # Delete the database "testdb"
To drop the database "testdb" from postgres:**@localhost:5432
? [No] | Yes: yes
Dropping "testdb" ... Done.
```

PostgreSQL.get_primary_keys

`PostgreSQL.get_primary_keys(table_name, schema_name=None, names_only=True)`

Get the primary keys of a table.

Parameters

- `table_name (str)` – name of a table
- `schema_name (str or None)` – name of a schema, defaults to None

- `names_only (bool)` – whether to return only the names of the primary keys, defaults to True

Returns

primary key(s) of the given table

Return type

list or pandas.DataFrame

Examples:

```
>>> from pyhelpers.dbms import PostgreSQL
>>> from pyhelpers._cache import example_dataframe

>>> testdb = PostgreSQL('localhost', 5432, 'postgres', database_name='testdb')
Password (postgres@localhost:5432): ***
Creating a database: "testdb" ... Done.
Connecting postgres:**@localhost:5432/testdb ... Successfully.

>>> dat = example_dataframe()
>>> dat
   Longitude    Latitude
City
London      -0.127647  51.507322
Birmingham -1.902691  52.479699
Manchester -2.245115  53.479489
Leeds       -1.543794  53.797418

>>> tbl_name = 'test_table'

>>> testdb.import_data(data=dat, table_name=tbl_name, index=True, verbose=True)
To import data into "public"."test_table" at postgres:**@localhost:5432/postgres
? [No] | Yes: yes

>>> pri_keys = testdb.get_primary_keys(table_name=tbl_name)
>>> pri_keys
[]

>>> testdb.add_primary_keys(primary_keys='City', table_name=tbl_name)
```

The “*test_table*” is illustrated in Fig. 13 below:

	City [PK] text	Longitude double precision	Latitude double precision
1	Birmingham	-1.902691	52.479699
2	Leeds	-1.543794	53.797418
3	London	-0.127647	51.507321
4	Manchester	-2.245114	53.479489

Fig. 13: The table “*test_table*” (with a primary key) in the database.

```
>>> pri_keys = testdb.get_primary_keys(table_name=tbl_name)
>>> pri_keys
['City']
>>> pri_keys = testdb.get_primary_keys(table_name=tbl_name, names_only=False)
>>> pri_keys
key_column data_type
0          City      text

>>> # Delete the database "testdb"
>>> testdb.drop_database(verbose=True)
To drop the database "testdb" from postgres:***@localhost:5432
? [No] |Yes: yes
Dropping "testdb" ... Done.
```

PostgreSQL.get_schema_names

`PostgreSQL.get_schema_names(include_all=False, names_only=True, column_names=None, verbose=False)`

Get the names of existing schemas.

Parameters

- `include_all (bool)` – whether to list all the available schemas, defaults to False
- `names_only (bool)` – whether to return only the names of the schema names, defaults to True
- `column_names (None or list)` – column names of the returned datafram if names_only=False; when column_names=None, it defaults to ['schema_name', 'schema_id', 'role']
- `verbose (bool or int)` – whether to print relevant information in console, defaults to False

Returns

schema names

Return type

list or pandas.DataFrame or None

Examples:

```
>>> from pyhelpers.dbms import PostgreSQL

>>> testdb = PostgreSQL('localhost', 5432, 'postgres', database_name='testdb')
Password (postgres@localhost:5432): ***
Creating a database: "testdb" ... Done.
Connecting postgres:***@localhost:5432/testdb ... Successfully.

>>> testdb.get_schema_names()
['public']

>>> testdb.get_schema_names(include_all=True, names_only=False)
```

(continues on next page)

(continued from previous page)

```

        schema_name      schema_owner     oid  nspowner
0          public    pg_database_owner  2200    6171
1          pg_toast      postgres       99      10
2          pg_catalog      postgres      11      10
3 information_schema      postgres  13183    10

>>> testdb.drop_schema(schema_names='public', verbose=True)
To drop the schema "public" from postgres:***@localhost:5432/testdb
? [No]|Yes: yes
Dropping "public" ... Done.

>>> testdb.get_schema_names() # None

>>> testdb.get_schema_names(verbose=True)
No schema exists in the currently-connected database "testdb".

>>> testdb.drop_database(verbose=True) # Delete the database "testdb"
To drop the database "testdb" from postgres:***@localhost:5432
? [No]|Yes: yes
Dropping "testdb" ... Done.

```

PostgreSQL.get_table_names

`PostgreSQL.get_table_names(schema_name=None, verbose=False)`

Get the names of all tables in a schema.

Parameters

- `schema_name (str or None)` – name of a schema; when `schema_name=None` (default), it defaults to `DEFAULT_SCHEMA` (i.e. `'public'`)
- `verbose (bool or int)` – whether to print relevant information in console, defaults to `False`

Returns

a list of table names

Return type

list or `None`

Examples:

```

>>> from pyhelpers.dbms import PostgreSQL

>>> testdb = PostgreSQL('localhost', 5432, 'postgres', database_name='testdb')
Password (postgres@localhost:5432): ***
Creating a database: "testdb" ... Done.
Connecting postgres:***@localhost:5432/testdb ... Successfully.

>>> lst_tbl_names = testdb.get_table_names()
>>> lst_tbl_names
[]

```

(continues on next page)

(continued from previous page)

```
>>> lst_tbl_names = testdb.get_table_names(schema_name='testdb', verbose=True)
The schema "testdb" does not exist.

>>> # Create a new table named "test_table" in the schema "testdb"
>>> new_tbl_name = 'test_table'
>>> col_spec = 'col_name_1 INT, col_name_2 TEXT'
>>> testdb.create_table(table_name=new_tbl_name, column_specs=col_spec, verbose=True)
Creating a table: "public"."test_table" ... Done.

>>> lst_tbl_names = testdb.get_table_names(schema_name='public')
>>> lst_tbl_names
['test_table']

>>> # Delete the database "testdb"
>>> testdb.drop_database(verbose=True)
To drop the database "testdb" from postgres:***@localhost:5432
? [No] |Yes: yes
Dropping "testdb" ... Done.
```

PostgreSQL.import_data

`PostgreSQL.import_data(data, table_name, schema_name=None, if_exists='fail', force_replace=False, chunk_size=None, col_type=None, method='multi', index=False, confirmation_required=True, verbose=False, **kwargs)`

Import tabular data into a table.

See also [[DBMS-PS-ID-1](#)] and [[DBMS-PS-ID-2](#)].

Parameters

- **data** (`pandas.DataFrame` or `pandas.io.parsers.TextFileReader` or `list` or `tuple`) – tabular data to be dumped into a database
- **table_name** (`str`) – name of a table
- **schema_name** (`str`) – name of a schema; when `schema_name=None` (default), it defaults to `DEFAULT_SCHEMA` (i.e. '`public`')
- **if_exists** (`str`) – if the table already exists, to '`replace`', '`append`' or, by default, '`fail`' and do nothing but raise a `ValueError`.
- **force_replace** (`bool`) – whether to force replacing existing table, defaults to `False`
- **chunk_size** (`int` or `None`) – the number of rows in each batch to be written at a time, defaults to `None`
- **col_type** (`dict` or `None`) – data types for columns, defaults to `None`
- **method** (`str` or `None` or `Callable`) – method for SQL insertion clause, defaults to '`multi`'
 - `None`: uses standard SQL `INSERT` clause (one per row);
 - '`multi`': pass multiple values in a single `INSERT` clause;

- callable (e.g. PostgreSQL.psql_insert_copy) with signature (pd_table, conn, keys, data_iter).
- **index** (bool) – whether to dump the index as a column
- **confirmation_required** (bool) – whether to prompt a message for confirmation to proceed, defaults to True
- **verbose** (bool or int) – whether to print relevant information in console as the function runs, defaults to False
- **kwargs** – [optional] parameters of pandas.DataFrame.to_sql

See also:

- Examples for the method `read_sql_query()`.

PostgreSQL.null_text_to_empty_string

```
PostgreSQL.null_text_to_empty_string(table_name, column_names=None,
                                      schema_name=None)
```

Convert null values (in text columns) to empty strings.

Parameters

- **table_name** (str) – name of a table
- **column_names** (str or list or None) – (list of) column name(s); when column_names=None (default), all available columns are included
- **schema_name** (str) – name of a schema

Examples:

```
>>> from pyhelpers.dbms import PostgreSQL
>>> from pyhelpers._cache import example_dataframe

>>> testdb = PostgreSQL('localhost', 5432, 'postgres', database_name='testdb')
Password (postgres@localhost:5432): ***
Creating a database: "testdb" ... Done.
Connecting postgres:**@localhost:5432/testdb ... Successfully.

>>> dat = example_dataframe()
>>> dat['Longitude'] = dat['Longitude'].astype(str)
>>> dat.loc['London', 'Longitude'] = None
>>> dat
      Longitude    Latitude
City
London          None  51.507322
Birmingham   -1.9026911  52.479699
Manchester   -2.2451148  53.479489
Leeds         -1.5437941  53.797418

>>> tbl_name = 'test_table'

>>> testdb.import_data(data=dat, table_name=tbl_name, index=True, verbose=True)
```

(continues on next page)

(continued from previous page)

```
To import data into "public"."test_table" at postgres:**@localhost:5432/postgres
? [No] |Yes: yes
```

```
>>> testdb.table_exists(table_name=tbl_name)
True

>>> testdb.get_column_dtype(table_name=tbl_name)
{'City': 'text', 'Longitude': 'text', 'Latitude': 'double precision'}
>>> dat_ = testdb.read_table(tbl_name)
>>> dat_.loc[0, 'Longitude'] is None
True
```

	City text	Longitude text	Latitude double precision
1	London	[null]	51.5073219
2	Birmingham	-1.9026911	52.4796992
3	Manchester	-2.2451148	53.4794892
4	Leeds	-1.5437941	53.7974185

Fig. 14: The table “test_table” in the database “testdb”.

```
>>> # Replace the 'null' value with an empty string
>>> testdb.null_text_to_empty_string(table_name=tbl_name)
>>> dat_ = testdb.read_table(tbl_name)
>>> dat_.loc[0, 'Longitude']
''
```

	City text	Longitude text	Latitude double precision
1	London		51.5073219
2	Birmingham	-1.9026911	52.4796992
3	Manchester	-2.2451148	53.4794892
4	Leeds	-1.5437941	53.7974185

Fig. 15: The table “test_table” in the database “testdb” (after converting ‘null’ to empty string).

```
>>> # Delete the database "testdb"
>>> testdb.drop_database(verbose=True)
To drop the database "testdb" from postgres:**@localhost:5432
? [No] |Yes: yes
Dropping "testdb" ... Done.
```

PostgreSQL.psql_insert_copy

```
static PostgreSQL.psql_insert_copy(sql_table, sql_db_engine, column_names, data_iter)
```

A callable using PostgreSQL COPY clause for executing inserting data.

Parameters

- `sql_table` – pandas.io.sql.SQLTable
- `sql_db_engine` – sqlalchemy.engine.Connection or sqlalchemy.engine.Engine
- `column_names` – (list of str) column names
- `data_iter` – iterable that iterates the values to be inserted

Note: This function is copied and slightly modified from the source code available at [\[DBMS-PS-PIC-1\]](#).

PostgreSQL.read_sql_query

```
PostgreSQL.read_sql_query(sql_query, method='tempfile', max_size_spooled=1, delimiter=',',  
                           tempfile_kwargs=None, stringio_kwargs=None, **kwargs)
```

Read table data by SQL query (recommended for large table).

See also [\[DBMS-PS-RSQ-1\]](#), [\[DBMS-PS-RSQ-2\]](#) and [\[DBMS-PS-RSQ-3\]](#).

Parameters

- `sql_query (str)` – a SQL query to be executed
- `method (str)` – method to be used for buffering temporary data
 - 'tempfile' (default): use `tempfile.TemporaryFile`
 - 'stringio': use `io.StringIO`
 - 'spooled': use `tempfile.SpooledTemporaryFile`
- `max_size_spooled (int or float)` – `max_size` of `tempfile.SpooledTemporaryFile`, defaults to 1 (in gigabyte)
- `delimiter (str)` – delimiter used in data, defaults to ', '
- `tempfile_kwargs (dict or None)` – [optional] parameters of `tempfile.TemporaryFile` or `tempfile.SpooledTemporaryFile`
- `stringio_kwargs (dict or None)` – [optional] parameters of `io.StringIO`, e.g. `initial_value` (default: '')
- `kwargs` – [optional] parameters of `pandas.read_csv`

Returns

data frame as queried by the statement `sql_query`

Return type
pandas.DataFrame

Examples:

```
>>> from pyhelpers.dbms import PostgreSQL
>>> from pyhelpers._cache import example_dataframe

>>> testdb = PostgreSQL('localhost', 5432, 'postgres', database_name='testdb')
Password (postgres@localhost:5432): ***
Creating a database: "testdb" ... Done.
Connecting postgres:**@localhost:5432/testdb ... Successfully.

>>> # Create an example dataframe
>>> example_df = example_dataframe()
>>> example_df
   Longitude    Latitude
City
London      -0.127647  51.507322
Birmingham  -1.902691  52.479699
Manchester   -2.245115  53.479489
Leeds        -1.543794  53.797418

>>> table = 'England'
>>> schema = 'points'

>>> # Import the data into a table named "points"."England"
>>> testdb.import_data(example_df, table, schema, index=True, verbose=2)
To import data into "points"."England" at postgres:**@localhost:5432/testdb
? [No] | Yes: yes
Creating a schema: "points" ... Done.
Importing the data into the table "points"."England" ... Done.
```

The table “*points*”.“*England*” is illustrated in Fig. 13 below:

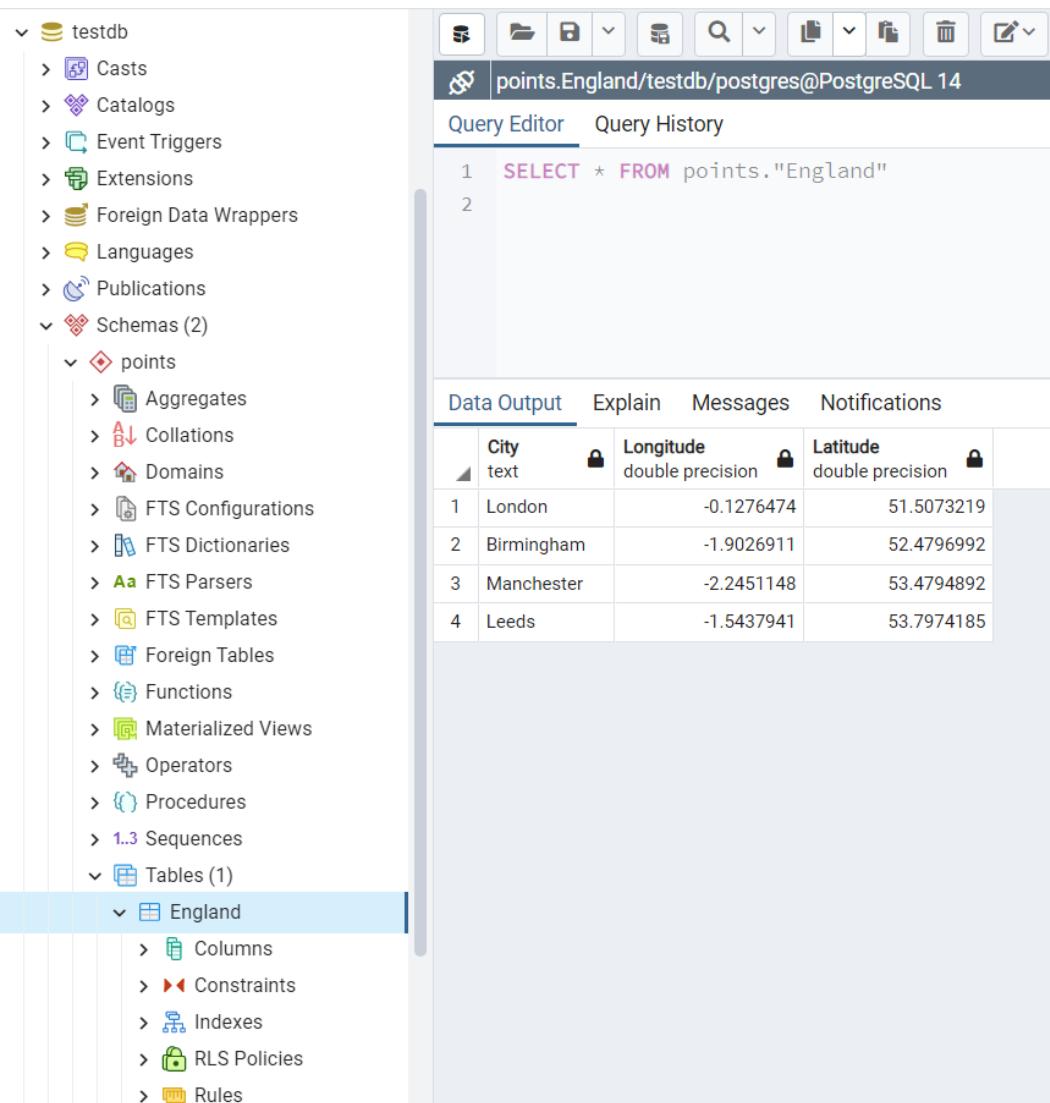


Fig. 16: The table “points”.”England” in the database “testdb”.

```

>>> rslt = testdb.table_exists(table_name=table, schema_name=schema)
>>> print(f"The table '{schema}'.'{table}' exists? {rslt}.")
The table "points"."England" exists? True.

>>> # Retrieve the data using the method .read_table()
>>> example_df_ret = testdb.read_table(table, schema_name=schema, index_col='City')
>>> example_df_ret
   Longitude    Latitude
City
London      -0.127647  51.507322
Birmingham  -1.902691  52.479699
Manchester  -2.245115  53.479489
Leeds        -1.543794  53.797418

>>> # Alternatively, read the data by a SQL query statement
>>> sql_qry = f'SELECT * FROM "{schema}"."{table}"'
>>> example_df_ret_alt = testdb.read_sql_query(sql_query=sql_qry, index_col='City')
>>> example_df_ret_alt

```

(continues on next page)

(continued from previous page)

	Longitude	Latitude
City		
London	-0.127647	51.507322
Birmingham	-1.902691	52.479699
Manchester	-2.245115	53.479489
Leeds	-1.543794	53.797418

```

>>> example_df_ret.equals(example_df_ret_alt)
True

>>> # Delete the table "points"."England"
>>> testdb.drop_table(table_name=table, schema_name=schema, verbose=True)
To drop the table "points"."England" from postgres:***@localhost:5432/testdb
? [No]|Yes: yes
Dropping "points"."England" ... Done.

>>> # Delete the schema "points"
>>> testdb.drop_schema(schema_names=schema, verbose=True)
To drop the schema "points" from postgres:***@localhost:5432/testdb
? [No]|Yes: yes
Dropping "points" ... Done.

>>> # Delete the database "testdb"
>>> testdb.drop_database(verbose=True)
To drop the database "testdb" from postgres:***@localhost:5432
? [No]|Yes: yes
Dropping "testdb" ... Done.

```

Aside: a brief example of using the parameter params for `pandas.read_sql`

```

import datetime
import pandas as pd

sqlqry = 'SELECT * FROM "table_name" '
        'WHERE "timestamp_column_name" BETWEEN %(ts_start)s AND %(ts_end)s'

params = {'d_start': datetime.datetime.today(), 'd_end': datetime.datetime.today()}

data_frame = pd.read_sql(sql=sqlqry, con=testdb.engine, params=params)

```

PostgreSQL.read_table

`PostgreSQL.read_table(table_name, schema_name=None, conditions=None, chunk_size=None, sorted_by=None, **kwargs)`

Read data from a table.

See also [[DBMS-PS-RT-1](#)].

Parameters

- `table_name (str)` – name of a table
- `schema_name (str)` – name of a schema; when `schema_name=None` (default), it defaults to `DEFAULT_SCHEMA` (i.e. 'public')

- **conditions** (*str or None*) – defaults to `None`
- **chunk_size** (*int or None*) – number of rows to include in each chunk, defaults to `None`
- **sorted_by** (*str or None*) – name(s) of a column (or columns) by which the retrieved data is sorted, defaults to `None`
- **kwargs** – [optional] parameters of the method `read_sql_query()` or the function `pandas.read_sql()`

Returns

data frame from the specified table

Return type

`pandas.DataFrame`

See also:

- Examples for the method `read_sql_query()`.

PostgreSQL.schema_exists

`PostgreSQL.schema_exists(schema_name)`

Check whether a schema exists.

Parameters

`schema_name` (*str*) – name of a schema

Returns

whether the schema exists

Return type

`bool`

Examples:

```
>>> from pyhelpers.dbms import PostgreSQL

>>> testdb = PostgreSQL('localhost', 5432, 'postgres', database_name='testdb')
Password (postgres@localhost:5432): ***
Creating a database: "testdb" ... Done.
Connecting postgres:***@localhost:5432/testdb ... Successfully.

>>> testdb.schema_exists('public')
True

>>> testdb.schema_exists('test_schema') # (if the schema 'test_schema' does not exist)
False

>>> testdb.drop_database(verbose=True) # Delete the database "testdb"
To drop the database "testdb" from postgres:***@localhost:5432
? [No] |Yes: yes
Dropping "testdb" ... Done.
```

PostgreSQL.table_exists

`PostgreSQL.table_exists(table_name, schema_name=None)`

Check whether a table exists.

Parameters

- `table_name (str)` – name of a table
- `schema_name (str)` – name of a schema; when `schema_name=None` (default), it defaults to `DEFAULT_SCHEMA` (i.e. 'public')

Returns

whether the table exists in the currently-connected database

Return type

`bool`

Examples:

```
>>> from pyhelpers.dbms import PostgreSQL

>>> testdb = PostgreSQL('localhost', 5432, 'postgres', database_name='testdb')
Password (postgres@localhost:5432): ***
Creating a database: "testdb" ... Done.
Connecting postgres:**@localhost:5432/testdb ... Successfully.

>>> tbl_name = 'points'

>>> testdb.table_exists(table_name=tbl_name) # (if 'public.points' does not exist)
False

>>> testdb.create_table(table_name=tbl_name, column_specs='column_0 INT', verbose=1)
Creating a table: "public"."points" ... Done.
>>> testdb.table_exists(table_name=tbl_name)
True

>>> testdb.drop_table(table_name=tbl_name, verbose=True)
To drop the table "public"."points" from postgres:**@localhost:5432/testdb
? [No]|Yes: yes
Dropping "public"."points" ... Done.

>>> testdb.drop_database(verbose=True) # Delete the database "testdb"
To drop the database "testdb" from postgres:**@localhost:5432
? [No]|Yes: yes
Dropping "testdb" ... Done.
```

MSSQL

```
class pyhelpers.dbms.MSSQL(host=None, port=None, username=None, password=None,
                           database_name=None, confirm_db_creation=False, verbose=True)
```

A class for basic communication with Microsoft SQL Server databases.

Parameters

- **host** (*str or None*) – name of the server running the SQL Server, e.g. 'localhost' or '127.0.0.1'; when host=None (default), it is initialized as 'localhost'
- **port** (*int or None*) – listening port; when port=None (default), it is initialized as 1433 (default by installation of the SQL Server)
- **username** (*str or None*) – name of the user or login used to connect; when username=None (default), the instantiation relies on Windows Authentication
- **password** (*str or int or None*) – user's password; when password=None (default), it is required to manually type in the correct password to connect the PostgreSQL server
- **database_name** (*str or None*) – name of a database; when database=None (default), it is initialized as 'master'
- **confirm_db_creation** (*bool*) – whether to prompt a confirmation before creating a new database (if the specified database does not exist), defaults to False
- **verbose** (*bool or int*) – whether to print relevant information in console, defaults to True

Variables

- **host** (*str*) – host name/address
- **port** (*str*) – listening port used by PostgreSQL
- **username** (*str*) – username
- **database_name** (*str*) – name of a database
- **credentials** (*dict*) – basic information about the server/database being connected
- **auth** (*str or None*) – authentication method (used for establish the connection)
- **address** (*str*) – representation of the database address
- **engine** (*sqlalchemy.engine.Engine*) – a SQLAlchemy connectable engine to a SQL Server; see also [DBMS-MS-3]

Examples:

```
>>> from pyhelpers.dbms import MSSQL

>>> mssql = MSSQL()
Connecting <server_name>@localhost:1433/master ... Successfully.

>>> mssql.address
'<server_name>@localhost:1433/master'

>>> testdb = MSSQL(database_name='testdb')
Creating a database: [testdb] ... Done.
Connecting <server_name>@localhost:1433/testdb ... Successfully.

>>> testdb.database_name
'testdb'

>>> testdb.drop_database(verbose=True)
To drop the database [testdb] from <server_name>@localhost:1433
? [No] |Yes: yes
Dropping [testdb] ... Done.
```

Attributes

<code>MSSQL.DEFAULT_DATABASE</code>	Default database name.
<code>MSSQL.DEFAULT_DIALECT</code>	Default dialect.
<code>MSSQL.DEFAULT_DRIVER</code>	Default name of database driver.
<code>MSSQL.DEFAULT_HOST</code>	Default host (server name).
<code>MSSQL.DEFAULT_ODBC_DRIVER</code>	Default ODBC driver.
<code>MSSQL.DEFAULT_PORT</code>	Default listening port used by Microsoft SQL Server.
<code>MSSQL.DEFAULT_SCHEMA</code>	Default schema name.
<code>MSSQL.DEFAULT_USERNAME</code>	Default username.

MSSQL.DEFAULT_DATABASE

`MSSQL.DEFAULT_DATABASE = 'master'`

Default database name.

MSSQL.DEFAULT_DIALECT

`MSSQL.DEFAULT_DIALECT = 'mssql'`

Default dialect. The dialect that SQLAlchemy uses to communicate with Microsoft SQL Server; see also [DBMS-MS-1].

MSSQL.DEFAULT_DRIVER

MSSQL.DEFAULT_DRIVER = 'pyodbc'

Default name of database driver. See also [DBMS-MS-2].

MSSQL.DEFAULT_HOST

MSSQL.DEFAULT_HOST = 'localhost'

Default host (server name). Alternatively, os.environ['COMPUTERNAME']

MSSQL.DEFAULT_ODBC_DRIVER

MSSQL.DEFAULT_ODBC_DRIVER = 'ODBC Driver 17 for SQL Server'

Default ODBC driver.

MSSQL.DEFAULT_PORT

MSSQL.DEFAULT_PORT = 1433

Default listening port used by Microsoft SQL Server.

MSSQL.DEFAULT_SCHEMA

MSSQL.DEFAULT_SCHEMA = 'dbo'

Default schema name.

MSSQL.DEFAULT_USERNAME

MSSQL.DEFAULT_USERNAME = 'sa'

Default username.

Methods

<code>connect_database([database_name, verbose])</code>	Establish a connection to a database.
<code>create_connection([database_name, ...])</code>	Create a SQLAlchemy connection.
<code>create_cursor([database_name])</code>	Create a <code>pyodbc</code> cursor.
<code>create_database(database_name[, verbose])</code>	Create a database.
<code>create_engine([database_name, auth, password])</code>	Create a SQLAlchemy connectable engine.
<code>create_schema(schema_name[, verbose])</code>	Create a schema.
<code>create_table(table_name, column_specs[, ...])</code>	Create a table.
<code>database_exists([database_name])</code>	Check whether a database exists.
<code>disconnect_database([database_name, verbose])</code>	Disconnect a database.
<code>drop_database([database_name, ...])</code>	Delete/drop a database.
<code>drop_schema(schema_names[, ...])</code>	Delete/drop one or multiple schemas.
<code>drop_table(table_name[, schema_name, ...])</code>	Delete/drop a table.
<code>get_column_names(table_name[, schema_name])</code>	Get column names of a table.
<code>get_database_names([names_only])</code>	Get names of all existing databases.
<code>get_file_tables([names_only])</code>	Get information about <i>FileTables</i> (if available).
<code>get_primary_keys([table_name, schema_name, ...])</code>	Get the primary keys of table(s).
<code>get_row_count(table_name[, schema_name])</code>	Get row count of a table in a database.
<code>get_schema_info([names_only, include_all, ...])</code>	Get the names of existing schemas.
<code>get_table_names([schema_name])</code>	Get names of all tables stored in a schema.
<code>has_dtypes(table_name, dtypes[, schema_name])</code>	Check whether a table contains data of a certain data type or data types.
<code>import_data(data, table_name[, schema_name, ...])</code>	Import tabular data into a table.
<code>read_columns(table_name, column_names[, ...])</code>	Read data of specific columns of a table.
<code>read_sql_query(sql_query, method, ...)</code>	
<code>read_table(table_name[, schema_name, ...])</code>	Read data from a table.
<code>schema_exists(schema_name)</code>	Check whether a schema exists.
<code>specify_conn_str([database_name, auth, password])</code>	Specify a string used for establishing a connection.
<code>table_exists(table_name[, schema_name])</code>	Check whether a table exists.

MSSQL.connect_database

`MSSQL.connect_database(database_name=None, verbose=False)`

Establish a connection to a database.

Parameters

- `database_name` (`str or None`) – name of a database; when `database_name=None` (default), the database name is input manually
- `verbose` (`bool or int`) – whether to print relevant information in console, defaults to `False`

Examples:

```
>>> from pyhelpers.dbms import MSSQL

>>> testdb = MSSQL(database_name='testdb')
Creating a database: [testdb] ... Done.
Connecting <server_name>@localhost:1433/testdb ... Successfully.

>>> testdb.connect_database(verbose=True)
Being connected with <server_name>@localhost:1433/testdb.

>>> testdb.connect_database(database_name='master', verbose=True)
Connecting <server_name>@localhost:1433/master ... Successfully.
>>> testdb.database_name
'master'

>>> testdb.connect_database(database_name='testdb', verbose=True)
Connecting <server_name>@localhost:1433/testdb ... Successfully.
>>> testdb.database_name
'testdb'

>>> testdb.drop_database(verbose=True) # Delete the database [testdb]
To drop the database [testdb] from <server_name>@localhost:1433
? [No] | Yes: yes
Dropping [testdb] ... Done.
>>> testdb.database_name
'master'
```

MSSQL.create_connection

`MSSQL.create_connection(database_name=None, close_with_result=False, mode=None)`

Create a SQLAlchemy connection.

Parameters

- `database_name` (`str or None`) – name of a database, defaults to the name of the currently-connected database when `database_name=None`
- `close_with_result` (`bool`) – parameter of the method `sqlalchemy.engine.Engine.connect()`, defaults to `False`

- **mode** (*None or str*) – when mode=None (default), the method uses the existing engine; when mode='pyodbc' (optional), it uses `pyodbc.connect()`

Returns

a SQLAlchemy connection to a Microsoft SQL Server

Return type

`sqlalchemy.engine.Connection` or `pyodbc.Connection`

Examples:

```
>>> from pyhelpers.dbms import MSSQL

>>> mssql = MSSQL()
Connecting <server_name>@localhost:1433/master ... Successfully.

>>> db_conn = mssql.create_connection()
>>> db_conn.should_close_with_result
False
>>> db_conn.closed
False
>>> rslt = db_conn.execute('SELECT 1')
>>> rslt.fetchall()
[(1,)]
>>> db_conn.closed
False
>>> db_conn.close()
>>> db_conn.closed
True

>>> db_conn = mssql.create_connection()
>>> db_conn.should_close_with_result
True
>>> db_conn.closed
False
>>> rslt = db_conn.execute('SELECT 1')
>>> rslt.fetchall()
[(1,)]
>>> db_conn.closed
True
```

MSSQL.create_cursor

`MSSQL.create_cursor(database_name=None)`

Create a `pyodbc` cursor.

Parameters

`database_name` (*str or None*) – name of a database, defaults to the name of the currently-connected database when `database=None`

Returns

a `pyodbc` cursor

Return type

`pyodbc.Cursor`

Examples:

```
>>> from pyhelpers.dbms import MSSQL

>>> mssql = MSSQL()
Connecting <server_name>@localhost:1433/master ... Successfully.

>>> db_cur = mssql.create_cursor()

>>> # Get information about all tables in the database [master]
>>> tables_in_db = db_cur.tables(schema='dbo', tableType='TABLE')
>>> list(tables_in_db)
[('master', 'dbo', 'MSreplication_options', 'TABLE', None),
 ('master', 'dbo', 'spt_fallback_db', 'TABLE', None),
 ('master', 'dbo', 'spt_fallback_dev', 'TABLE', None),
 ('master', 'dbo', 'spt_fallback_usg', 'TABLE', None),
 ('master', 'dbo', 'spt_monitor', 'TABLE', None)]

>>> db_cur.close()
```

MSSQL.create_database**MSSQL.create_database**(*database_name*, *verbose=False*)

Create a database.

Parameters

- **database_name** (*str*) – name of a database
- **verbose** (*bool or int*) – whether to print relevant information in console, defaults to False

Examples:

```
>>> from pyhelpers.dbms import MSSQL

>>> testdb = MSSQL(database_name='testdb')
Creating a database: [testdb] ... Done.
Connecting <server_name>@localhost:1433/testdb ... Successfully.

>>> testdb.database_name
'testdb'

>>> testdb.create_database(database_name='testdb1', verbose=True)
Creating a database: [testdb1] ... Done.
>>> testdb.database_name
'testdb1'

>>> # Delete the database [testdb1]
>>> testdb.drop_database(verbose=True)
To drop the database [testdb1] from <server_name>@localhost:5432
? [No]|Yes: yes
Dropping [testdb1] ... Done.
>>> testdb.database_name
'master'
```

(continues on next page)

(continued from previous page)

```
>>> # Delete the database [testdb]
>>> testdb.drop_database(database_name='testdb', verbose=True)
To drop the database [testdb] from <server_name>@localhost:5432
? [No]|Yes: yes
Dropping [testdb] ... Done.
>>> testdb.database_name
'master'
```

MSSQL.create_engine

`MSSQL.create_engine(database_name=None, auth=None, password=None)`

Create a [SQLAlchemy](#) connectable engine.

Connect string format: '`mssql+pyodbc://<username>:<password>@<dsn_name>`'

Parameters

- `database_name` (`str or None`) – name of a database, defaults to the name of the currently-connected database when `database=None`
- `auth` (`str or None`) – authentication method (used for establish the connection), defaults to the current authentication method when `auth=None`
- `password` (`str or int or None`) – user's password; when `password=None` (default), it is required to manually type in the correct password to connect the PostgreSQL server

Returns

a SQLAlchemy connectable engine

Return type

`sqlalchemy.engine.Engine`

1. Use `pyodbc` (or `pypyodbc`):

```
connect_string = 'driver={...};server=...;database=...;uid=username;pwd=...'
conn = pyodbc.connect(connect_string) # conn = pypyodbc.connect(connect_string)
```

2. Use `SQLAlchemy`:

```
conn_string = 'mssql+pyodbc:///?odbc_connect=%s' % quote_plus(connect_string)
engine = sqlalchemy.create_engine(conn_string)
conn = engine.connect()
```

Examples:

```
>>> from pyhelpers.dbms import MSSQL

>>> mssql = MSSQL()
Connecting <server_name>@localhost:1433/master ... Successfully.

>>> db_engine = mssql.create_engine()
```

(continues on next page)

(continued from previous page)

```
>>> db_engine.name
'mssql'

>>> db_engine.dispose()
```

MSSQL.create_schema

`MSSQL.create_schema(schema_name, verbose=False)`

Create a schema.

Parameters

- `schema_name (str)` – name of a schema in the currently-connected database
- `verbose (bool or int)` – whether to print relevant information in console, defaults to False

Examples:

```
>>> from pyhelpers.dbms import MSSQL

>>> testdb = MSSQL(database_name='testdb')
Creating a database: [testdb] ... Done.
Connecting <server_name>@localhost:1433/testdb ... Successfully.

>>> test_schema_name = 'test_schema'
>>> testdb.create_schema(schema_name=test_schema_name, verbose=True)
Creating a schema: [test_schema] ... Done.

>>> testdb.schema_exists(schema_name=test_schema_name)
True

>>> testdb.drop_database(verbose=True) # Delete the database [testdb]
To drop the database [testdb] from <server_name>@localhost:1433
? [No]|Yes: yes
Dropping [testdb] ... Done.
```

MSSQL.create_table

`MSSQL.create_table(table_name, column_specs, schema_name=None, verbose=False)`

Create a table.

Parameters

- `table_name (str)` – name of a table
- `column_specs (str)` – specifications for each column of the table
- `schema_name (str or None)` – name of a schema; when `schema_name=None` (default), it defaults to `DEFAULT_SCHEMA` (i.e. 'dbo')
- `verbose (bool or int)` – whether to print relevant information in console, defaults to False

Examples:

```
>>> from pyhelpers.dbms import MSSQL

>>> testdb = MSSQL(database_name='testdb')
Creating a database: [testdb] ... Done.
Connecting <server_name>@localhost:1433/testdb ... Successfully.

>>> tbl_name = 'test_table'
>>> col_spec = 'col_name_1 INT, col_name_2 varchar(255)'

>>> testdb.create_table(table_name=tbl_name, column_specs=col_spec, verbose=True)
Creating a table: [dbo].[test_table] ... Done.

>>> testdb.table_exists(table_name=tbl_name)
True

>>> testdb.get_column_names(table_name=tbl_name)
['col_name_1', 'col_name_2']

>>> # Drop the table [dbo].[test_table]
>>> testdb.drop_table(table_name=tbl_name, verbose=True)
To drop the table [dbo].[test_table] from <server_name>@localhost:1433/testdb
? [No]|Yes: yes
Dropping [dbo].[test_table] ... Done.

>>> # Delete the database [testdb]
>>> testdb.drop_database(verbose=True)
To drop the database [testdb] from <server_name>@localhost:1433
? [No]|Yes: yes
Dropping [testdb] ... Done.
```

MSSQL.database_exists**MSSQL.database_exists**(*database_name=None*)

Check whether a database exists.

Parameters**database_name** (*str or None*) – name of a database, defaults to None**Returns**

whether the database exists

Return type

bool

Examples:

```
>>> from pyhelpers.dbms import MSSQL

>>> testdb = MSSQL(database_name='testdb')
Creating a database: [testdb] ... Done.
Connecting <server_name>@localhost:1433/testdb ... Successfully.

>>> # Check whether the database [testdb] exists now
```

(continues on next page)

(continued from previous page)

```
>>> testdb.database_name
'testdb'
>>> testdb.database_exists(database_name='testdb')
True

>>> # Delete the database [testdb]
>>> testdb.drop_database(verbose=True)
To drop the database [testdb] from <server_name>@localhost:1433
? [No]|Yes: yes
Dropping [testdb] ... Done.

>>> # Check again whether the database [testdb] still exists now
>>> testdb.database_exists(database_name='testdb')
False
>>> testdb.database_name
'master'
```

MSSQL.disconnect_database

`MSSQL.disconnect_database(database_name=None, verbose=False)`

Disconnect a database.

Parameters

- `database_name (str or None)` – name of database to disconnect from; if `database_name=None` (default), disconnect the current database.
- `verbose (bool or int)` – whether to print relevant information in console, defaults to False

Examples:

```
>>> from pyhelpers.dbms import MSSQL

>>> testdb = MSSQL(database_name='testdb')
Creating a database: [testdb] ... Done.
Connecting <server_name>@localhost:1433/testdb ... Successfully.

>>> testdb.database_name
'testdb'

>>> testdb.disconnect_database()
>>> testdb.database_name
'master'

>>> # Delete the database [testdb]
>>> testdb.drop_database(database_name='testdb', verbose=True)
To drop the database [testdb] from <server_name>@localhost:1433
? [No]|Yes: yes
Dropping [testdb] ... Done.

>>> testdb.drop_database(database_name='testdb', verbose=True)
The database [testdb] does not exist.
```

MSSQL.drop_database

`MSSQL.drop_database(database_name=None, confirmation_required=True, verbose=False)`

Delete/drop a database.

Parameters

- **database_name** (*str or None*) – database to be disconnected; if `database_name=None` (default), drop the database being currently currented
- **confirmation_required** (*bool*) – whether to prompt a message for confirmation to proceed, defaults to True
- **verbose** (*bool or int*) – whether to print relevant information in console, defaults to False

Examples:

```
>>> from pyhelpers.dbms import MSSQL

>>> testdb = MSSQL(database_name='testdb')
Creating a database: [testdb] ... Done.
Connecting <server_name>@localhost:1433/testdb ... Successfully.
>>> testdb.database_name
'testdb'

>>> testdb.drop_database(verbose=True) # Delete the database [testdb]
To drop the database [testdb] from <server_name>@localhost:1433
? [No]|Yes: yes
Dropping [testdb] ... Done.

>>> testdb.database_exists(database_name='testdb')
False
>>> testdb.drop_database(database_name='testdb', verbose=True)
The database [testdb] does not exist.
>>> testdb.database_name
'master'
```

MSSQL.drop_schema

`MSSQL.drop_schema(schema_names, confirmation_required=True, verbose=False)`

Delete/drop one or multiple schemas.

Parameters

- **schema_names** (*str / Iterable [str]*) – name of one schema, or names of multiple schemas
- **confirmation_required** (*bool*) – whether to prompt a message for confirmation to proceed, defaults to True
- **verbose** (*bool / int*) – whether to print relevant information in console as the function runs, defaults to False

Examples:

```
>>> from pyhelpers.dbms import MSSQL

>>> testdb = MSSQL(database_name='testdb')
Creating a database: [testdb] ... Done.
Connecting <server_name>@localhost:1433/testdb ... Successfully.

>>> new_schema_names = ['points', 'lines', 'polygons']
>>> for new_schema in new_schema_names:
...     testdb.create_schema(new_schema, verbose=True)
Creating a schema: [points] ... Done.
Creating a schema: [lines] ... Done.
Creating a schema: [polygons] ... Done.

>>> new_schema_names_ = ['test_schema']
>>> testdb.drop_schema(new_schema_names + new_schema_names_, verbose=True)
To drop the following schemas from postgres:**@localhost:5432/testdb:
    "points"
    "lines"
    "polygons"
    "test_schema"
? [No]|Yes: yes
Dropping ...
    "points" ... Done.
    "lines" ... Done.
    "polygons" ... Done.
    "test_schema" (does not exist.)

>>> testdb.drop_database(verbose=True) # Delete the database "testdb"
To drop the database "testdb" from postgres:**@localhost:5432
? [No]|Yes: yes
Dropping "testdb" ... Done.
```

MSSQL.drop_table

`MSSQL.drop_table(table_name, schema_name=None, confirmation_required=True, verbose=False)`

Delete/drop a table.

Parameters

- `table_name (str)` – name of a table
- `schema_name (str or None)` – name of a schema; when `schema_name=None` (default), it defaults to `DEFAULT_SCHEMA` (i.e. '`dbo`')
- `confirmation_required (bool)` – whether to prompt a message for confirmation to proceed, defaults to `True`
- `verbose (bool or int)` – whether to print relevant information in console, defaults to `False`

See also:

- Examples for the method `create_table()`.

MSSQL.get_column_names

`MSSQL.get_column_names(table_name, schema_name=None)`

Get column names of a table.

Parameters

- `table_name` (`str`) – name of a table in the currently-connected database
- `schema_name` (`str or None`) – defaults to `None`

Returns

a list of column names

Return type

list

Examples:

```
>>> from pyhelpers.dbms import MSSQL

>>> mssql = MSSQL()
Connecting <server_name>@localhost:1433/master ... Successfully.

>>> mssql.get_table_names()
['MSreplication_options',
 'spt_fallback_db',
 'spt_fallback_dev',
 'spt_fallback_usg',
 'spt_monitor']

>>> mssql.get_column_names(table_name='MSreplication_options')
['optname',
 'value',
 'major_version',
 'minor_version',
 'revision',
 'install_failures']
```

MSSQL.get_database_names

`MSSQL.get_database_names(names_only=True)`

Get names of all existing databases.

Parameters

- `names_only` (`bool`) – whether to return only the names of the databases,
defaults to `True`

Returns

names of all existing databases

Return type

list or `pandas.DataFrame`

Examples:

```
>>> from pyhelpers.dbms import MSSQL

>>> mssql = MSSQL()
Connecting <server_name>@localhost:1433/master ... Successfully.

>>> mssql.get_database_names()
['master',
 'tempdb',
 'model',
 'msdb']
```

MSSQL.get_file_tables

`MSSQL.get_file_tables(names_only=True)`

Get information about *FileTables* (if available).

Parameters

`names_only (bool)` – whether to return *FileTables* names only, defaults to True

Returns

information about *FileTables* (if available)

Return type

list or pandas.DataFrame

Examples:

```
>>> from pyhelpers.dbms import MSSQL

>>> mssql = MSSQL()
Connecting <server_name>@localhost:1433/master ... Successfully.

>>> mssql.get_file_tables()
[]
```

MSSQL.get_primary_keys

`MSSQL.get_primary_keys(table_name=None, schema_name=None, table_type='TABLE')`

Get the primary keys of table(s).

Parameters

- `table_name (str or None)` – name of a table in the currently-connected database; when `table_name=None` (default), get the primary keys of all existing tables
- `schema_name (str or None)` – name of a schema, defaults to `DEFAULT_SCHEMA` when `schema_name=None`
- `table_type (str)` – table type, defaults to 'TABLE'

Returns

a list of primary keys

Return type

list

Examples:

```
>>> from pyhelpers.dbms import MSSQL

>>> mssql = MSSQL()
Connecting <server_name>@localhost:1433/master ... Successfully.

>>> mssql.get_primary_keys()
[]
```

MSSQL.get_row_count**MSSQL.get_row_count**(*table_name*, *schema_name*=None)

Get row count of a table in a database.

Parameters

- **table_name** (str) – name of a table in the currently-connected database
- **schema_name** (str or None) – schema name of the given table, defaults to None

Returns

count of rows in the given table

Return type

int

Examples:

```
>>> from pyhelpers.dbms import MSSQL

>>> mssql = MSSQL()
Connecting <server_name>@localhost:1433/master ... Successfully.

>>> mssql.get_table_names()
['MSreplication_options',
 'spt_fallback_db',
 'spt_fallback_dev',
 'spt_fallback_usg',
 'spt_monitor']

>>> mssql.get_row_count(table_name='MSreplication_options')
3
```

MSSQL.get_schema_info

```
MSSQL.get_schema_info(names_only=True, include_all=False, column_names=None,
                      verbose=False)
```

Get the names of existing schemas.

Parameters

- **names_only** (*bool*) – whether to return only the names of the schema names, defaults to True
- **include_all** (*bool*) – whether to list all the available schemas, defaults to False
- **column_names** (*None or list*) – column names of the returned dataframe if names_only=False; when column_names=None, it defaults to ['schema_name', 'schema_id', 'role']
- **verbose** (*bool or int*) – whether to print relevant information in console, defaults to False

Returns

schema names

Return type

list or pandas.DataFrame or None

Examples:

```
>>> from pyhelpers.dbms import MSSQL

>>> testdb = MSSQL(database_name='testdb')
Creating a database: [testdb] ... Done.
Connecting <server_name>@localhost:1433/testdb ... Successfully.

>>> testdb.get_schema_info()
['dbo']

>>> test_schema_name = 'test_schema'
>>> testdb.create_schema(schema_name=test_schema_name, verbose=True)
Creating a schema: [test_schema] ... Done.
>>> testdb.get_schema_info()
['dbo', 'test_schema']

>>> testdb.get_schema_info(names_only=False, include_all=True)
   schema_name      schema_owner  schema_id
0    db_accessadmin  db_accessadmin     16385
1  db_backupoperator  db_backupoperator     16389
2    db_datareader    db_datareader     16390
3    db_datawriter    db_datawriter     16391
4     db_ddladmin     db_ddladmin     16387
5  db_denydatareader  db_denydatareader     16392
6  db_denydatawriter  db_denydatawriter     16393
7       db_owner        db_owner     16384
8  db_securityadmin  db_securityadmin     16386
9          dbo            dbo         1
```

(continues on next page)

(continued from previous page)

```

10           guest           guest      2
11 INFORMATION_SCHEMA INFORMATION_SCHEMA 3
12           sys            sys       4
13       test_schema        dbo       5

>>> testdb.drop_schema(schema_names='test_schema', verbose=True)
To drop the schema "test_schema" from <server_name>@localhost:1433/testdb
? [No]|Yes: yes
Dropping "test_schema" ... Done.

>>> testdb.get_schema_info()  # None
['dbo']

>>> testdb.drop_database(verbose=True)  # Delete the database "testdb"
To drop the database [testdb] from <server_name>@localhost:1433
? [No]|Yes: yes
Dropping [testdb] ... Done.

```

MSSQL.get_table_names

`MSSQL.get_table_names(schema_name=None)`

Get names of all tables stored in a schema.

Parameters

`schema_name (str or list or None)` – name of a schema, defaults to `DEFAULT_SCHEMA` when `schema_name=None`

Returns

names of tables in the given schema `mssql_schema_name`

Return type

list

Examples:

```

>>> from pyhelpers.dbms import MSSQL

>>> mssql = MSSQL()
Connecting <server_name>@localhost:1433/master ... Successfully.

>>> mssql.get_table_names()
['MSreplication_options',
 'spt_fallback_db',
 'spt_fallback_dev',
 'spt_fallback_usg',
 'spt_monitor']

>>> mssql.get_table_names(schema_name=['dbo', 'sys'])

```

MSSQL.has_dtypes

`MSSQL.has_dtypes(table_name, dtypes, schema_name=None)`

Check whether a table contains data of a certain data type or data types.

Parameters

- `table_name` (`str`) – name of a table in the currently-connected database
- `dtypes` (`str or Sequence [str]`) – data types, such as '`geometry`', '`hierarchyid`', '`varbinary`'
- `schema_name` (`str or None`) – name of a schema, defaults to `DEFAULT_SCHEMA` when `schema_name=None`

Returns

data type, whether the table has this data type and the corresponding column names

Return type

`Generator[str, bool, list]`

Examples:

```
>>> from pyhelpers.dbms import MSSQL

>>> mssql = MSSQL()
Connecting <server_name>@localhost:1433/master ... Successfully.

>>> mssql.get_table_names()
['MSreplication_options',
 'spt_fallback_db',
 'spt_fallback_dev',
 'spt_fallback_usg',
 'spt_monitor']

>>> rsdt = mssql.has_dtypes(table_name='spt_monitor', dtypes='varbinary')
>>> list(rsdt)
[('varbinary', False, [])]

>>> rsdt = mssql.has_dtypes(table_name='spt_monitor', dtypes=['geometry', 'int'])
>>> list(rsdt)
[('geometry', False, []),
 ('int',
  True,
  ['cpu_busy',
   'io_busy',
   'idle',
   'pack_received',
   'pack_sent',
   'connections',
   'pack_errors',
   'total_read',
   'total_write',
   'total_errors'])]
```

MSSQL.import_data

```
MSSQL.import_data(data, table_name, schema_name=None, if_exists='fail', force_replace=False,
                   chunk_size=None, col_type=None, method='multi', index=False,
                   confirmation_required=True, verbose=False, **kwargs)
```

Import tabular data into a table.

See also [DBMS-MS-ID-1].

Parameters

- **data** (`pandas.DataFrame` / `pandas.io.parsers.TextFileReader` / `list` / `tuple`) – tabular data to be dumped into a database
- **table_name** (`str`) – name of a table
- **schema_name** (`str` or `None`) – name of a schema; when `schema_name=None` (default), it defaults to `DEFAULT_SCHEMA` (i.e. `'public'`)
- **if_exists** (`str`) – if the table already exists, to `'replace'`, `'append'` or, by default, `'fail'` and do nothing but raise a `ValueError`.
- **force_replace** (`bool`) – whether to force replacing existing table, defaults to `False`
- **chunk_size** (`int` / `None`) – the number of rows in each batch to be written at a time, defaults to `None`
- **col_type** (`dict` / `None`) – data types for columns, defaults to `None`
- **method** (`str` / `None` / `Callable`) – method for SQL insertion clause, defaults to `'multi'`
 - `None`: uses standard SQL `INSERT` clause (one per row);
 - `'multi'`: pass multiple values in a single `INSERT` clause;
 - `callable` (e.g. `PostgreSQL.psql_insert_copy`) with signature `(pd_table, conn, keys, data_iter)`.
- **index** (`bool`) – whether to dump the index as a column
- **confirmation_required** (`bool`) – whether to prompt a message for confirmation to proceed, defaults to `True`
- **verbose** (`bool` / `int`) – whether to print relevant information in console, defaults to `False`
- **kwargs** – [optional] parameters of `pandas.DataFrame.to_sql`

Examples:

```
>>> from pyhelpers.dbms import MSSQL
>>> from pyhelpers._cache import example_dataframe

>>> testdb = MSSQL(database_name='testdb')
```

(continues on next page)

(continued from previous page)

```

Creating a database: [testdb] ... Done.
Connecting <server_name>@localhost:1433/testdb ... Successfully.

>>> example_df = example_dataframe()
>>> example_df
   Longitude    Latitude
City
London      -0.127647  51.507322
Birmingham  -1.902691  52.479699
Manchester  -2.245115  53.479489
Leeds        -1.543794  53.797418

>>> test_table_name = 'example_df'

>>> testdb.import_data(example_df, table_name=test_table_name, index=True, verbose=2)
To import data into [dbo].[example_df] at <server_name>@localhost:1433/testdb
? [No] | Yes: yes
Importing the data into the table [dbo].[example_df] ... Done.

```

The imported example data can also be viewed using Microsoft SQL Server Management Studio (as illustrated in Fig. 17 below):

The screenshot shows the Object Explorer on the left and the Results tab of a query editor on the right.

Object Explorer:

- testdb
 - Database Diagrams
 - Tables
 - System Tables
 - FileTables
 - External Tables
 - Graph Tables
 - dbo.example_df
 - Columns
 - City (varchar(max), null)
 - Longitude (float, null)
 - Latitude (float, null)
 - Keys
 - Constraints
 - Triggers
 - Indexes
 - Statistics
 - Views
 - External Resources
 - Synonyms
 - Programmability
 - Service Broker
 - Storage
 - Security

Results Tab:

	City	Longitude	Latitude
1	London	-0.1276474	51.5073219
2	Birmingham	-1.9026911	52.4796992
3	Manchester	-2.2451148	53.4794892
4	Leeds	-1.5437941	53.7974185

Fig. 17: The table [dbo].[example_df] in the database [testdb].

```

>>> # Drop/delete the table [dbo].[example_df]
>>> testdb.drop_table(table_name=test_table_name, verbose=True)
To drop the table [dbo].[example_df] from <server_name>@localhost:1433/testdb
? [No] | Yes: yes

```

(continues on next page)

(continued from previous page)

```
Dropping [dbo].[example_df] ... Done.

>>> # Drop/delete the database [testdb]
>>> testdb.drop_database(verbose=True)
To drop the database [testdb] from <server_name>@localhost:1433
? [No] |Yes: yes
Dropping [testdb] ... Done.
```

See also:

- Examples for the method `read_table()`.

MSSQL.read_columns

`MSSQL.read_columns(table_name, column_names, dtype=None, schema_name=None, chunk_size=None, **kwargs)`

Read data of specific columns of a table.

Parameters

- `table_name` (`str`) – name of a table in the currently-connected database
- `column_names` (`list or tuple`) – column name(s) of the specified table
- `dtype` (`str or None`) – data type, defaults to `None`; options include '`hierarchyid`', '`varbinary`' and '`geometry`'
- `schema_name` (`str or None`) – name of a schema, defaults to `DEFAULT_SCHEMA` when `schema_name=None`
- `chunk_size` (`int or None`) – number of rows to include in each chunk (if specified), defaults to `None`
- `kwargs` – [optional] parameters of `pandas.read_sql`

Returns

data of specific columns of the queried table

Return type

`pandas.DataFrame`

Examples:

```
>>> from pyhelpers.dbms import MSSQL
>>> from pyhelpers._cache import example_dataframe

>>> mssql = MSSQL()
Connecting <server_name>@localhost:1433/master ... Successfully.

>>> mssql.get_table_names()
['MSreplication_options',
 'spt_fallback_db',
 'spt_fallback_dev',
 'spt_fallback_usg',
```

(continues on next page)

(continued from previous page)

```
'spt_monitor']

>>> mssql.read_columns('MSreplication_options', column_names=['optname', 'value'])
      optname   value
0  transactional    True
1        merge    True
2  security_model    True
```

See also:

- Examples for the method `read_table()`.

MSSQL.read_sql_query

`MSSQL.read_sql_query(sql_query, method, max_size_spooled, delimiter, tempfile_kwargs, stringio_kwargs, **kwargs)`

MSSQL.read_table

`MSSQL.read_table(table_name, schema_name=None, column_names=None, conditions=None, chunk_size=None, save_as=None, data_dir=None, verbose=False, **kwargs)`

Read data from a table.

Parameters

- `table_name (str)` – name of a table in the currently-connected database
- `schema_name (str or None)` – name of a schema, defaults to `DEFAULT_SCHEMA` when `schema_name=None`
- `column_names (list or tuple or None)` – column name(s), defaults to all columns when `column_names=None`
- `conditions (str or None)` – conditions in a SQL query statement, defaults to `None`
- `chunk_size (int or None)` – number of rows to include in each chunk (if specified), defaults to `None`
- `save_as (str or None)` – file extension (if specified) for saving table data locally, defaults to `None`
- `data_dir (str or None)` – directory where the table data is to be saved, defaults to `None`
- `verbose (bool / int)` – whether to print relevant information in console, defaults to `False`
- `kwargs` – [optional] parameters of `pandas.read_sql`

Returns

data of the queried table

Return type
pandas.DataFrame

Examples:

```
>>> from pyhelpers.dbms import MSSQL
>>> from pyhelpers._cache import example_dataframe

>>> mssql = MSSQL()
Connecting <server_name>@localhost:1433/master ... Successfully.

>>> mssql.get_table_names()
['MSreplication_options',
 'spt_fallback_db',
 'spt_fallback_dev',
 'spt_fallback_usg',
 'spt_monitor']

>>> mssql.read_table(table_name='MSreplication_options')
      optname  value  ...  revision  install_failures
0  transactional    True  ...          0                 0
1        merge    True  ...          0                 0
2  security_model    True  ...          0                 0
[3 rows x 6 columns]

>>> mssql.read_table(table_name='MSreplication_options', column_names=['optname'])
      optname
0  transactional
1        merge
2  security_model

>>> # Create a new database for testing
>>> testdb = MSSQL(database_name='testdb')
Creating a database: [testdb] ... Done.
Connecting <server_name>@localhost:1433/testdb ... Successfully.

>>> example_df = example_dataframe()
>>> example_df
      Longitude  Latitude
City
London      -0.127647  51.507322
Birmingham   -1.902691  52.479699
Manchester    -2.245115  53.479489
Leeds       -1.543794  53.797418

>>> test_table_name = 'example_df'
>>> testdb.import_data(example_df, table_name=test_table_name, index=True, verbose=2)
To import data into [dbo].[example_df] at <server_name>@localhost:1433/testdb
? [No]|Yes: yes
Importing the data into the table [dbo].[example_df] ... Done.

>>> # Retrieve the imported data
>>> example_df_ret = testdb.read_table(table_name=test_table_name, index_col='City')
>>> example_df_ret
      Longitude  Latitude
City
London      -0.127647  51.507322
Birmingham   -1.902691  52.479699
```

(continues on next page)

(continued from previous page)

```

Manchester -2.245115 53.479489
Leeds      -1.543794 53.797418

>>> # Drop/Delete the testing database [testdb]
>>> testdb.drop_database(verbose=True)
To drop the database [testdb] from <server_name>@localhost:1433
? [No]|Yes: yes
Dropping [testdb] ... Done.

```

See also:

- Examples for the method `import_data()`.

MSSQL.schema_exists`MSSQL.schema_exists(schema_name)`

Check whether a schema exists.

Parameters`schema_name (str)` – name of a schema in the currently-connected database**Returns**

whether the schema exists

Return type`bool`**Examples:**

```

>>> from pyhelpers.dbms import MSSQL

>>> testdb = MSSQL(database_name='testdb')
Creating a database: [testdb] ... Done.
Connecting <server_name>@localhost:1433/testdb ... Successfully.

>>> testdb.schema_exists('dbo')
True

>>> testdb.schema_exists('test_schema') # (if the schema [test_schema] does not exist)
False

>>> testdb.drop_database(verbose=True) # Delete the database [testdb]
To drop the database [testdb] from <server_name>@localhost:1433
? [No]|Yes: yes
Dropping [testdb] ... Done.

```

MSSQL.specify_conn_str

`MSSQL.specify_conn_str(database_name=None, auth=None, password=None)`

Specify a string used for establishing a connection.

Parameters

- `database_name` (`str or None`) – name of a database, defaults to the name of the currently-connected database when `database=None`
- `auth` (`str or None`) – authentication method (used for establish the connection), defaults to the current authentication method when `auth=None`
- `password` (`str or int or None`) – user's password; when `password=None` (default), it is required to manually type in the correct password to connect the PostgreSQL server

Returns

connection string

Return type

`str`

Examples:

```
>>> from pyhelpers.dbms import MSSQL

>>> mssql = MSSQL()
Connecting <server_name>@localhost:1433/master ... Successfully.

>>> conn_str = mssql.specify_conn_str()
>>> conn_str
'DRIVER={ODBC Driver 17 for SQL Server};SERVER={localhost};DATABASE={master};Trusted_...
```

MSSQL.table_exists

`MSSQL.table_exists(table_name, schema_name=None)`

Check whether a table exists.

Parameters

- `table_name` (`str`) – name of a table
- `schema_name` (`str or None`) – name of a schema, defaults to `DEFAULT_SCHEMA` when `schema_name=None`

Returns

whether the table exists in the currently-connected database

Return type

`bool`

Examples:

```
>>> from pyhelpers.dbms import MSSQL

>>> mssql = MSSQL()
Connecting <server_name>@localhost:1433/master ... Successfully.

>>> mssql.table_exists(table_name='test_table')
False

>>> mssql.get_table_names()
['MSreplication_options',
 'spt_fallback_db',
 'spt_fallback_dev',
 'spt_fallback_usg',
 'spt_monitor']

>>> mssql.table_exists(table_name='MSreplication_options')
True
```

3.7.2 Database tools/utilities

<code>make_database_address(host, port, username)</code>	Make a string of a database address.
<code>get_default_database_address(db_cls)</code>	Get default database address of a given class in the current module.
<code>mssql_to_postgresql(mssql, postgres[, ...])</code>	Copy tables of a database from a Microsoft SQL server to a PostgreSQL server.

`make_database_address`

`pyhelpers.dbms.utils.make_database_address(host, port, username, database_name='')`

Make a string of a database address.

Parameters

- `host (str)` – host name/address of a PostgreSQL server
- `port (int or str)` – listening port used by PostgreSQL
- `username (str)` – username of a PostgreSQL server
- `database_name (str or None)` – name of a database, defaults to ""

Returns

address of a database

Return type

`str`

Examples:

```
>>> from pyhelpers.dbms.utils import make_database_address

>>> db_addr = make_database_address('localhost', 5432, 'postgres', 'postgres')
(continues on next page)
```

(continued from previous page)

```
>>> db_addr
'postgres:***@localhost:5432/postgres'
```

get_default_database_address

`pyhelpers.dbms.utils.get_default_database_address(db_cls)`

Get default database address of a given class in the current module.

Parameters

`db_cls (object)` – a class representation of a database

Returns

default address of database

Return type

`str`

Examples:

```
>>> from pyhelpers.dbms.utils import get_default_database_address
>>> from pyhelpers.dbms import PostgreSQL

>>> db_addr = get_default_database_address(db_cls=PostgreSQL)
>>> db_addr
'None:***@None:None'
```

mssql_to_postgresql

`pyhelpers.dbms.utils.mssql_to_postgresql(mssql, postgres, mssql_schema=None, postgres_schema=None, chunk_size=None, excluded_tables=None, file_tables=False, memory_threshold=2.0, update=False, confirmation_required=True, verbose=True)`

Copy tables of a database from a Microsoft SQL server to a PostgreSQL server.

Parameters

- `mssql` (`pyhelpers.dbms.MSSQL`) – name of a Microsoft SQL (source) database
- `postgres` (`pyhelpers.dbms.PostgreSQL`) – name of a PostgreSQL (destination) database
- `mssql_schema` (`str or None`) – name of a schema to be migrated from the SQL Server
- `postgres_schema` (`str or None`) – name of a schema to store the migrated data in the PostgreSQL server
- `chunk_size` (`int or None`) – number of rows in each batch to be read/written at a time, defaults to `None`

- **excluded_tables** (*list or None*) – names of tables that are excluded from the data migration
- **file_tables** (*bool*) – whether to include FileTables, defaults to False
- **memory_threshold** (*float or int*) – threshold (in GiB) beyond which the data is migrated by partitions, defaults to 2.
- **update** (*bool*) – whether to redo the transfer between the database servers, defaults to False
- **confirmation_required** (*bool*) – whether asking for confirmation to proceed, defaults to True
- **verbose** (*bool or int*) – whether to print relevant information, defaults to True

Examples:

```
>>> from pyhelpers.dbms.utils import mssql_to_postgresql
>>> from pyhelpers.dbms import PostgreSQL, MSSQL
>>> from pyhelpers._cache import example_dataframe

>>> # Connect/create a PostgreSQL database, which is named [testdb]
>>> mssql_testdb = MSSQL(database_name='testdb')
Creating a database: [testdb] ... Done.
Connecting <server_name>@localhost:1433/testdb ... Successfully.

>>> mssql_testdb.database_name
'testdb'

>>> example_df = example_dataframe()
>>> example_df
   Longitude   Latitude
City
London      -0.127647  51.507322
Birmingham  -1.902691  52.479699
Manchester   -2.245115  53.479489
Leeds        -1.543794  53.797418

>>> test_table_name = 'example_df'

>>> # Import the example dataframe into a table named [example_df]
>>> mssql_testdb.import_data(example_df, table_name=test_table_name, index=True, verbose=2)
To import data into [dbo].[example_df] at <server_name>@localhost:1433/testdb
? [No]|Yes: yes
Importing the data into the table [dbo].[example_df] ... Done.

>>> mssql_testdb.get_column_names(table_name=test_table_name)
['City', 'Longitude', 'Latitude']
```

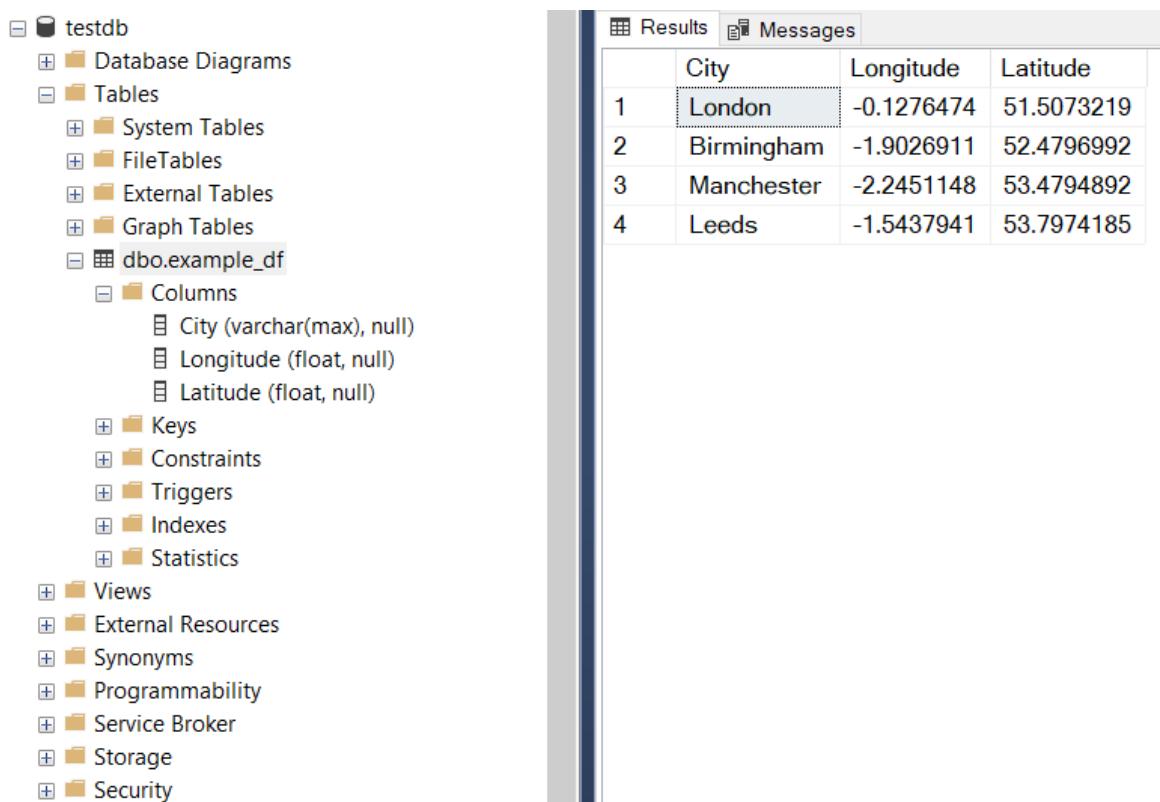


Fig. 18: The table `[dbo].[example_df]` in the Microsoft SQL Server database `[testdb]`.

```
>>> # Create an instance for a PostgreSQL database, which is also named "testdb"
>>> postgres_testdb = PostgreSQL(database_name='testdb')
Password (postgres@localhost:5432): ***
Creating a database: "testdb" ... Done.
Connecting postgres:**@localhost:5432/testdb ... Successfully.

>>> # For now, the newly-created database doesn't contain any tables
>>> postgres_testdb.get_table_names()
[]

>>> # Copy the example data from the SQL Server to the PostgreSQL "testdb" (under "public")
>>> mssql_to_postgresql(mssql=mssql_testdb, postgres=postgres_testdb)
To copy tables from [testdb] (MSSQL) to "testdb" (PostgreSQL)
? [No] | Yes: yes
Processing tables ...
(1/1) Copying [dbo].[example_df] to "public"."example_df" ... Done.
Completed.

>>> postgres_testdb.get_table_names()
['example_df']
```

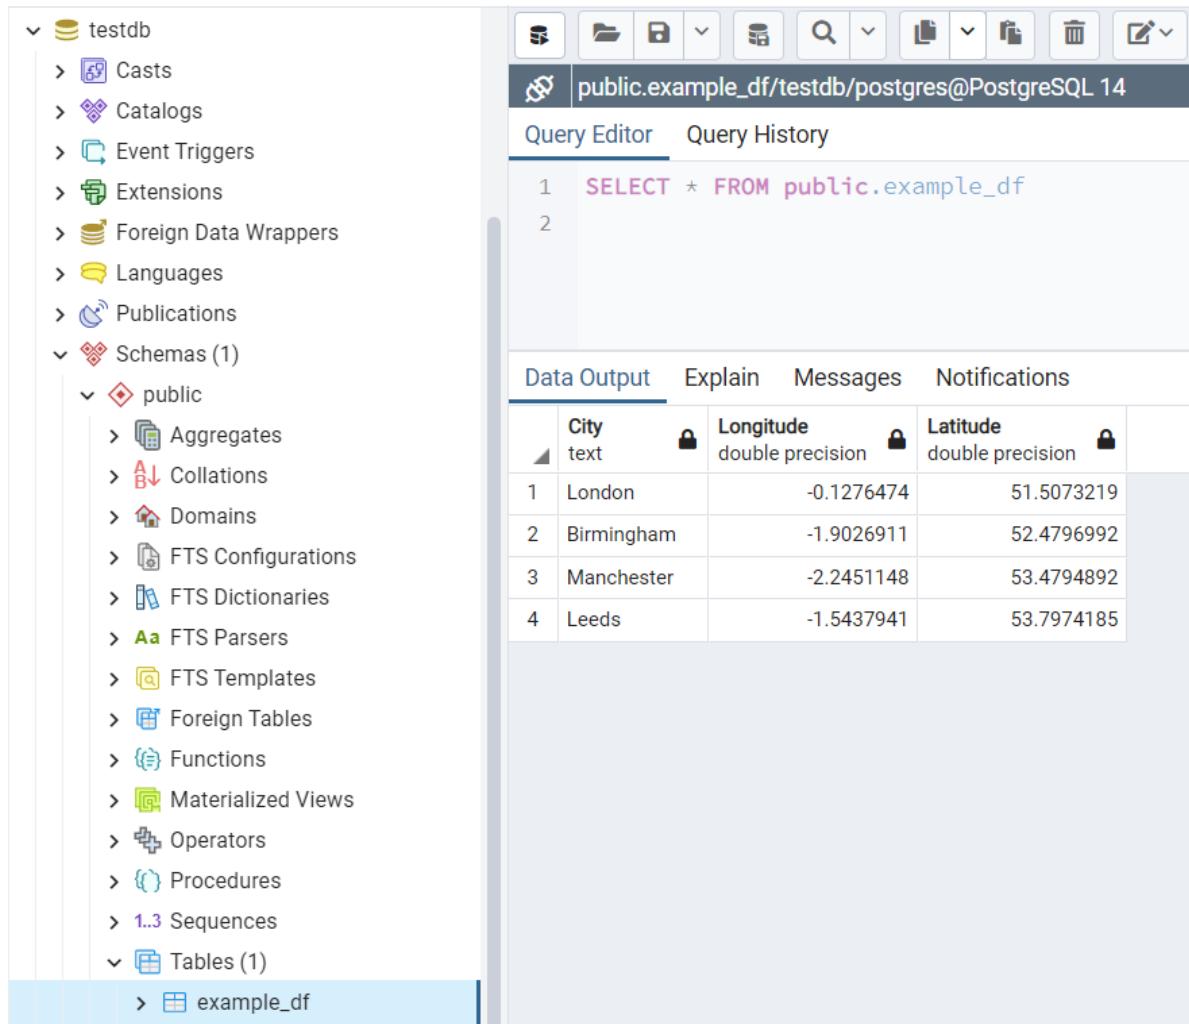


Fig. 19: The table “dbo”.”example_df” in the PostgreSQL database “testdb”.

```
>>> # Drop/delete the created databases
>>> mssql_testdb.drop_database(verbose=True)
To drop the database [testdb] from <server_name>@localhost:1433
? [No]|Yes: yes
Dropping [testdb] ... Done.

>>> postgres_testdb.drop_database(verbose=True)
To drop the database "testdb" from postgres:**@localhost:5432
? [No]|Yes: yes
Dropping "testdb" ... Done.
```

Chapter 4

Contributors

- Qian Fu
- Xiangyong Luo

Chapter 5

License

PyHelpers is licensed under [GNU General Public License v3.0](#) or later (GPLv3+).

Chapter 6

Quick start

This quick-start tutorial provides a few examples for each of the [Modules](#). These examples are intended to demonstrate the capabilities of [pyhelpers](#) in assisting us with data manipulation tasks in our daily work.

6.1 Preparation - Create a data set

To begin with, let's create an example data set using [NumPy](#) and [Pandas](#). This data set will be used throughout this tutorial.

Note:

- [NumPy](#) and [Pandas](#) are automatically installed when we install [pyhelpers](#) since they are among the package's dependencies.
-

For the purpose of demonstration, firstly, we can use the function `numpy.random.rand` to generate a 100-by-100 Numpy array of random samples drawn from a standard uniform distribution; let's name the array `random_array`:

```
>>> import numpy as np # Import NumPy and abbreviate it to 'np'  
>>> np.random.seed(0) # Ensure that the generated array data is reproducible  
>>> random_array = np.random.rand(100, 100)  
array([[0.5488135 , 0.71518937, 0.60276338, ..., 0.02010755, 0.82894003,  
       0.00469548],  
      [0.67781654, 0.27000797, 0.73519402, ..., 0.25435648, 0.05802916,  
       0.43441663],  
      [0.31179588, 0.69634349, 0.37775184, ..., 0.86219152, 0.97291949,  
       0.96083466],  
      ...,  
      [0.89111234, 0.26867428, 0.84028499, ..., 0.5736796 , 0.73729114,  
       0.22519844],  
      [0.26969792, 0.73882539, 0.80714479, ..., 0.94836806, 0.88130699,  
       0.1419334 ],
```

(continues on next page)

(continued from previous page)

```
[0.88498232, 0.19701397, 0.56861333, ..., 0.75842952, 0.02378743,
 0.81357508]])

>>> random_array.shape # Check the shape of the array
(100, 100)
```

Then, we use the class `pandas.DataFrame` to transform `random_array` into a Pandas data frame, which is presented in tabular form, and name it `data_frame`:

```
>>> import pandas as pd # Import Pandas and abbreviate it to 'pd'

>>> data_frame = pd.DataFrame(random_array, columns=['col_' + str(x) for x in range(100)])
>>> data_frame
   col_0      col_1      col_2    ...    col_97      col_98      col_99
0  0.548814  0.715189  0.602763  ...  0.020108  0.828940  0.004695
1  0.677817  0.270008  0.735194  ...  0.254356  0.058029  0.434417
2  0.311796  0.696343  0.377752  ...  0.862192  0.972919  0.960835
3  0.906555  0.774047  0.333145  ...  0.356707  0.016329  0.185232
4  0.401260  0.929291  0.099615  ...  0.401714  0.248413  0.505866
...
   ...      ...      ...    ...    ...      ...      ...
95  0.029929  0.985128  0.094747  ...  0.369907  0.910011  0.142890
96  0.616935  0.202908  0.288809  ...  0.215006  0.143577  0.933162
97  0.891112  0.268674  0.840285  ...  0.573680  0.737291  0.225198
98  0.269698  0.738825  0.807145  ...  0.948368  0.881307  0.141933
99  0.884982  0.197014  0.568613  ...  0.758430  0.023787  0.813575
[100 rows x 100 columns]
```

[See also the example of *saving data as a Pickle file*.]

6.2 Alter settings for display of data

The module `pyhelpers.settings` can be used to alter a few frequently-used parameters (of `GDAL`, `Matplotlib`, `NumPy` and `Pandas`) such that the working environment is adapted to suit our own preferences. For example, we could apply the function `np_preferences()` with its default parameters whereby we may have a ‘neater’ view of the `random_array`:

```
>>> from pyhelpers.settings import np_preferences

>>> # To round the numbers to four decimal places
>>> np_preferences() # By default, reset=False and precision=4

>>> random_array
array([[0.5488, 0.7152, 0.6028, 0.5449, 0.4237, ..., 0.1832, 0.5865, 0.0201, 0.8289, 0.0047],
       [0.6778, 0.2700, 0.7352, 0.9622, 0.2488, ..., 0.4905, 0.2274, 0.2544, 0.0580, 0.4344],
       [0.3118, 0.6963, 0.3778, 0.1796, 0.0247, ..., 0.2243, 0.0978, 0.8622, 0.9729, 0.9608],
       [0.9066, 0.7740, 0.3331, 0.0811, 0.4072, ..., 0.9590, 0.3554, 0.3567, 0.0163, 0.1852],
       [0.4013, 0.9293, 0.0996, 0.9453, 0.8695, ..., 0.2717, 0.4554, 0.4017, 0.2484, 0.5059],
       ...,
       [0.0299, 0.9851, 0.0947, 0.4510, 0.8387, ..., 0.1239, 0.2947, 0.3699, 0.9100, 0.1429],
       [0.6169, 0.2029, 0.2888, 0.4451, 0.5472, ..., 0.4776, 0.8664, 0.2150, 0.1436, 0.9332],
       [0.8911, 0.2687, 0.8403, 0.7570, 0.9954, ..., 0.9835, 0.4088, 0.5737, 0.7373, 0.2252],
       [0.2697, 0.7388, 0.8071, 0.2006, 0.3087, ..., 0.5063, 0.2319, 0.9484, 0.8813, 0.1419],
       [0.8850, 0.1970, 0.5686, 0.9310, 0.5645, ..., 0.5504, 0.3972, 0.7584, 0.0238, 0.8136]])
```

To reset the display, we can set `reset=True` by which the altered parameters are reset to their default values:

```
>>> np_preferences(reset=True)

>>> random_array
array([[0.54881350, 0.71518937, 0.60276338, ..., 0.02010755, 0.82894003,
       0.00469548],
       [0.67781654, 0.27000797, 0.73519402, ..., 0.25435648, 0.05802916,
       0.43441663],
       [0.31179588, 0.69634349, 0.37775184, ..., 0.86219152, 0.97291949,
       0.96083466],
       ...,
       [0.89111234, 0.26867428, 0.84028499, ..., 0.57367960, 0.73729114,
       0.22519844],
       [0.26969792, 0.73882539, 0.80714479, ..., 0.94836806, 0.88130699,
       0.14193340],
       [0.88498232, 0.19701397, 0.56861333, ..., 0.75842952, 0.02378743,
       0.81357508]])
```

Note:

- Basically, the function `np_preferences()` inherits the functionality of `numpy.set_printoptions`, but with some modifications.

For another example, the function `pd_preferences()` alters a few Pandas options and settings, such as representation and maximum number of columns when displaying a Pandas DataFrame. Applying the function with its default parameters should allow us to view all the 100 columns and the precision of numbers changes to four decimal places.

```
>>> from pyhelpers.settings import pd_preferences

>>> pd_preferences() # By default, reset=False and precision=4

>>> data_frame
      col_0   col_1   col_2   col_3   col_4   col_5   col_6   col_7   col_8   col_9   col_10  col_11 ...
0    0.5488  0.7152  0.6028  0.5449  0.4237  0.6459  0.4376  0.8918  0.9637  0.3834  0.7917  0.5289 ...
1    0.6778  0.2700  0.7352  0.9622  0.2488  0.5762  0.5920  0.5723  0.2231  0.9527  0.4471  0.8464 ...
2    0.3118  0.6963  0.3778  0.1796  0.0247  0.0672  0.6794  0.4537  0.5366  0.8967  0.9903  0.2169 ...
3    0.9066  0.7740  0.3331  0.0811  0.4072  0.2322  0.1325  0.0534  0.7256  0.0114  0.7706  0.1469 ...
4    0.4013  0.9293  0.0996  0.9453  0.8695  0.4542  0.3267  0.2327  0.6145  0.0331  0.0156  0.4288 ...
...   ...
95   0.0299  0.9851  0.0947  0.4510  0.8387  0.4216  0.2488  0.4140  0.8239  0.0449  0.4888  0.1935 ...
96   0.6169  0.2029  0.2888  0.4451  0.5472  0.1754  0.5955  0.6072  0.4085  0.2007  0.3339  0.0980 ...
97   0.8911  0.2687  0.8403  0.7570  0.9954  0.1634  0.8974  0.0570  0.6731  0.6692  0.9157  0.2279 ...
98   0.2697  0.7388  0.8071  0.2006  0.3087  0.0087  0.3848  0.9011  0.4013  0.7590  0.0574  0.5879 ...
99   0.8850  0.1970  0.5686  0.9310  0.5645  0.2116  0.2650  0.6786  0.7470  0.5918  0.2814  0.1868 ...
[100 rows x 100 columns]
```

Note:

- Here the columns from 'col_12' to 'col_99' are omitted from the above demonstration due to the limit of the page width.

Similarly, the function `pd_preferences()` also offers a parameter `reset`, which defaults to `False`; by setting `reset=True`, the altered parameters are reset to their default values. In addition, we can also set `reset='all'` to reset all Pandas options to their default values, if needed.

```
>>> pd_preferences(reset=True)

>>> data_frame
      col_0    col_1    col_2 ...    col_97    col_98    col_99
0  0.548814  0.715189  0.602763 ...  0.020108  0.828940  0.004695
1  0.677817  0.270008  0.735194 ...  0.254356  0.058029  0.434417
2  0.311796  0.696343  0.377752 ...  0.862192  0.972919  0.960835
3  0.906555  0.774047  0.333145 ...  0.356707  0.016329  0.185232
4  0.401260  0.929291  0.099615 ...  0.401714  0.248413  0.505866
...     ...
95 0.029929  0.985128  0.094747 ...  0.369907  0.910011  0.142890
96 0.616935  0.202908  0.288809 ...  0.215006  0.143577  0.933162
97 0.891112  0.268674  0.840285 ...  0.573680  0.737291  0.225198
98 0.269698  0.738825  0.807145 ...  0.948368  0.881307  0.141933
99 0.884982  0.197014  0.568613 ...  0.758430  0.023787  0.813575
[100 rows x 100 columns]
```

Note:

- The functions that are currently available in the module `pyhelpers.settings` handle only a few parameters for the author's personal preference. We may change the source code as appropriate to adapt the settings to different tastes.

6.3 Specify a directory or a file path

The module `pyhelpers.dirs` offers to assist with manipulating folders/directories. For example, the function `cd()` returns an absolute path to the current working directory or, if specified, to a subdirectory or a file any level deep from the current working directory:

```
>>> from pyhelpers.dirs import cd
>>> import os

>>> cwd = cd() # The current working directory

>>> # Relative path of `cwd` to the current working directory
>>> rel_path_cwd = os.path.relpath(cwd)
>>> print(rel_path_cwd)
.
```

To specify a path to a temporary folder, named "pyhelpers_tutorial":

```
>>> # Name of a temporary folder for this tutorial
>>> dir_name = "pyhelpers_tutorial"

>>> # Path to the folder "pyhelpers_tutorial"
```

(continues on next page)

(continued from previous page)

```
>>> path_to_dir = cd(dir_name)

>>> # Relative path of the directory
>>> rel_dir_path = os.path.relpath(path_to_dir)
>>> print(rel_dir_path)
pyhelpers_tutorial
```

Check whether the directory "pyhelpers_tutorial\" exists:

```
>>> print(f'The directory "{rel_dir_path}\' exists? {os.path.exists(path_to_dir)}')
The directory "pyhelpers_tutorial\" exists? False
```

If the directory "pyhelpers_tutorial\" does not exist, we could set the parameter `mkdir=True` by which the directory should be created as we specify the path:

```
>>> # Set `mkdir` to be `True` to create a folder named "pyhelpers_tutorial"
>>> path_to_dir = cd(dir_name, mkdir=True)

>>> # Check again whether the directory "pyhelpers_tutorial\" exists
>>> print(f'The directory "{rel_dir_path}\' exists? {os.path.exists(path_to_dir)}')
The directory "pyhelpers_tutorial\" exists? True
```

When we specify a sequence of names (in order with a filename being the last), the function `cd()` would assume that all the names prior to the filename are folder names, which specify a path to the file. For example, let's specify a path to a file named "quick_start.dat":

```
>>> # Name of a file
>>> filename = "quick_start.dat"

>>> # Path to the file named "quick_start.dat"
>>> path_to_file = cd(dir_name, filename) # path_to_file = cd(path_to_dir, filename)

>>> # Relative path of the file "quick_start.dat"
>>> rel_file_path = os.path.relpath(path_to_file)
>>> print(rel_file_path)
pyhelpers_tutorial\quick_start.dat
```

If any of the folders/subfolders of a specified path does not exist, setting `mkdir=True` should enable the function `cd()` to create all the missing ones along the path. For example, let's specify a data directory, named "data", which is contained within the folder "pyhelpers_tutorial":

```
>>> # Path to a data directory
>>> data_dir = cd("pyhelpers_tutorial", "data") # equivalent to `cd(path_to_dir, "data")` 

>>> # Relative path of the data directory
>>> rel_data_dir = os.path.relpath(data_dir)
>>> print(rel_data_dir)
pyhelpers_tutorial\data
```

We can use the function `is_dir()` to examine whether `data_dir` (or `rel_data_dir`) specifies a path (or a relative path) to a directory:

```
>>> from pyhelpers.dirs import is_dir
```

(continues on next page)

(continued from previous page)

```
>>> # Check whether `rel_data_dir` specifies a (relative) path to a directory
>>> print(f'`rel_data_dir` specifies a directory pathname? {is_dir(rel_data_dir)}')
`rel_data_dir` specifies a directory pathname? True

>>> # Check whether the data directory exists
>>> print(f'The directory "{rel_data_dir}" exists? {os.path.exists(rel_data_dir)}')
The directory "pyhelpers_tutorial\data\" exists? False
```

For another example, let's specify a path to a Pickle file, named "dat.pickle", in the directory "pyhelpers_tutorial\data\":

```
>>> # Filename of a Pickle file
>>> pickle_filename = "dat.pickle"

>>> # Path to the Pickle file, i.e. cd("pyhelpers_tutorial", "data", "dat.pickle")
>>> path_to_pickle = cd(data_dir, pickle_filename)

>>> # Relative path of the Pickle file
>>> rel_pickle_path = os.path.relpath(path_to_pickle)
>>> print(rel_pickle_path)
pyhelpers_tutorial\data\dat.pickle
```

Examine rel_pickle_path (or path_to_pickle):

```
>>> # Check whether `rel_pickle_path` specifies a directory
>>> print(f'`rel_pickle_path` specifies a directory? {os.path.isdir(rel_pickle_path)}')
`rel_pickle_path` specifies a directory? False

>>> # Check whether the file "dat.pickle" exists
>>> print(f'The file "{rel_pickle_path}" exists? {os.path.exists(rel_pickle_path)}')
The file "pyhelpers_tutorial\data\dat.pickle" exists? False
```

Let's now set the parameter mkdir to be True:

```
>>> path_to_pickle = cd(data_dir, pickle_filename, mkdir=True)
>>> rel_data_dir = os.path.relpath(data_dir)

>>> # Check again whether the data directory exists
>>> print(f'The directory "{rel_data_dir}" exists? {os.path.exists(rel_data_dir)}')
The directory "pyhelpers_tutorial\data\" exists? True

>>> # Check again whether the file "dat.pickle" exists
>>> print(f'The file "{rel_pickle_path}" exists? {os.path.exists(rel_pickle_path)}')
The file "pyhelpers_tutorial\data\dat.pickle" exists? False
```

[See also the example of *saving data as a Pickle file*.]

To delete the directory "pyhelpers_tutorial" (and all contained within it), we can use the function `delete_dir()`:

```
>>> from pyhelpers.dirs import delete_dir

>>> # Delete the directory "pyhelpers_tutorial\
>>> delete_dir(path_to_dir, verbose=True)
To delete the directory "pyhelpers_tutorial\" (Not empty)
```

(continues on next page)

(continued from previous page)

```
? [No] |Yes: yes
Deleting "pyhelpers_tutorial\" ... Done.
```

6.4 Save data to / load data from a Pickle file

The module `pyhelpers.store` can facilitate tasks such as saving our data to, and loading the data from, file-like objects of some popular formats, such as `CSV`, `JSON` and `Pickle`. For example, we could save the `data_frame` that has been created in the [Preparation](#quickstart-preparation) section as a `Pickle` file by using the functions `save_pickle()` and retrieve it later by using `load_pickle()`. Firstly, let's save `data_frame` to `path_to_pickle`, which has been specified in the *Specify a directory or a file path* section:

```
>>> from pyhelpers.store import save_pickle, load_pickle

>>> # Write `data_frame` to the file "dat.pickle"
>>> save_pickle(data_frame, path_to_pickle, verbose=True)
Saving "dat.pickle" to "pyhelpers_tutorial\data\" ... Done.
```

Now, we can retrieve the data from `path_to_pickle` and store the retrieved data in another variable named `df_retrieved`:

```
>>> df_retrieved = load_pickle(path_to_pickle, verbose=True)
Loading "pyhelpers_tutorial\data\dat.pickle" ... Done.
```

Check whether `df_retrieved` is equal to `data_frame` (namely, whether they have the same shape and elements):

```
>>> print(f'`df_retrieved` is equal to `data_frame`? {df_retrieved.equals(data_frame)}')
`df_retrieved` is equal to `data_frame`? True
```

Before we move on, let's delete again the `Pickle` file (i.e. `path_to_pickle`) and the directory created in the above example:

```
>>> delete_dir(path_to_dir, verbose=True)
To delete the directory "pyhelpers_tutorial\" (Not empty)
? [No] |Yes: yes
Deleting "pyhelpers_tutorial\" ... Done.
```

Note:

- In the module `pyhelpers.store`, some functions such as `save_spreadsheet()` and `save_spreadsheets()` may require `openpyxl`, `XlsxWriter` or `xlrd`, which are NOT essential dependencies for the installation of `pyhelpers`. We could install them as needed via an appropriate method such as `pip install`.

6.5 Convert coordinates between OSGB36 and WGS84

The module `pyhelpers.geom` can assist us in manipulating geometric and geographical data. For example, we can use the function `osgb36_to_wgs84()` to convert coordinates from OSGB36 (British national grid) to WGS84 (latitude and longitude):

```
>>> from pyhelpers.geom import osgb36_to_wgs84

>>> # To convert coordinate of a single point (530034, 180381):
>>> easting, northing = 530039.558844, 180371.680166 # London

>>> longitude, latitude = osgb36_to_wgs84(easting, northing) # Longitude and latitude
>>> (longitude, latitude)
(-0.12764738750268856, 51.507321895400686)
```

We could also use the function to convert an array of OSGB36 coordinates:

```
>>> from pyhelpers._cache import example_dataframe

>>> example_df = example_dataframe(osgb36=True)
>>> example_df
      Easting      Northing
City
London      530039.558844  180371.680166
Birmingham  406705.887014  286868.166642
Manchester   383830.039036  398113.055831
Leeds        430147.447354  433553.327117

>>> xy_array = example_df.to_numpy()
>>> eastings, northings = xy_array.T

>>> lonlat_array = osgb36_to_wgs84(eastings, northings, as_array=True)
>>> lonlat_array
array([[-0.12764739, 51.50732190],
       [-1.90269109, 52.47969920],
       [-2.24511479, 53.47948920],
       [-1.54379409, 53.79741850]])
```

Similarly, we can convert from the (longitude, latitude) back to (easting, northing) by using the function `wgs84_to_osgb36()`:

```
>>> from pyhelpers.geom import wgs84_to_osgb36

>>> longitudes, latitudes = lonlat_array.T

>>> xy_array_ = wgs84_to_osgb36(longitudes, latitudes, as_array=True)
>>> xy_array_
array([[530039.55972534, 180371.67967567],
       [406705.88783629, 286868.16621896],
       [383830.03985454, 398113.05550332],
       [430147.44820845, 433553.32682598]])
```

Note:

- Conversion of coordinates between different systems may inevitably introduce errors, which

are mostly negligible.

Check whether `xy_array_` is almost equal to `xy_array`:

```
>>> eq_res = np.array_equal(np.round(xy_array, 2), np.round(xy_array_, 2))
>>> print(f'`xy_array_` is almost equal to `xy_array`? {eq_res}')
`xy_array_` is almost equal to `xy_array`? True
```

6.6 Find similar texts

The module `pyhelpers.text` can assist us in manipulating textual data. For example, suppose we have a word 'angle', which is stored in a `str`-type variable named `word`, and a list of words, which is stored in a `list`-type variable named `lookup_list`; if we'd like to find from the list a one that is most similar to 'angle', we can use the function `find_similar_str()`:

```
>>> from pyhelpers.text import find_similar_str

>>> word = 'angle'
>>> lookup_list = ['Anglia',
...                 'East Coast',
...                 'East Midlands',
...                 'North and East',
...                 'London North Western',
...                 'Scotland',
...                 'South East',
...                 'Wales',
...                 'Wessex',
...                 'Western']

>>> # Find the most similar word to 'angle'
>>> result_1 = find_similar_str(word, lookup_list)
>>> result_1
'Anglia'
```

By default, the function relies on `difflib` - a Python built-in module - to perform the task. Alternatively, we could also make use of an open-source package, `RapidFuzz`, via setting the parameter `engine='rapidfuzz'` (or simply `engine='fuzz'`):

```
>>> # Find the most similar word to 'angle' by using RapidFuzz
>>> result_2 = find_similar_str(word, lookup_list, engine='rapidfuzz')
>>> result_2
'Anglia'
```

Note:

- The package `RapidFuzz` is NOT an essential dependency for the installation of `pyhelpers`. We need to install it (e.g. via `pip install`) to make the function run successfully with setting `engine='rapidfuzz'` (or `engine='fuzz'`).

6.7 Download an image file

The module `pyhelpers.ops` provides a miscellany of helper functions that may assist with various operations. For example, we can use the function `download_file_from_url()` to download a file from a given URL.

Let's now try to download an image file of [Python logo](#) from its [home page](#). Firstly, we need to specify the URL of the image file:

```
>>> from pyhelpers.ops import download_file_from_url

>>> # URL of a .png file of the Python logo
>>> url = 'https://www.python.org/static/community_logos/python-logo-master-v3-TM.png'
```

Then, we need to specify a directory where we'd like to save the image file, and a filename for it; let's say we want to name the file "python-logo.png" and save it to the directory "pyhelpers_tutorial\images\":

```
>>> python_logo_filename = "python-logo.png"
>>> # python_logo_file_path = cd("pyhelpers_tutorial", "images", python_logo_filename)
>>> python_logo_file_path = cd(path_to_dir, "images", python_logo_filename)

>>> # Download the .png file of the Python logo
>>> download_file_from_url(url, python_logo_file_path, verbose=False)
```

The parameter `verbose` is by default `False`. If we set `verbose=True`, the function would print out relevant information about the download as the file is being downloaded.

Note:

- When `verbose=True` (or `verbose=1`), the function requires an open-source package `tqdm`, which is NOT an essential dependency for installing `pyhelpers>=1.2.15`. We can just install the dependency package via `pip install` to make the function run successfully.

Assuming `tqdm` has been installed in our working environment, try:

```
>>> download_file_from_url(url, python_logo_file_path, if_exists='replace', verbose=True)
"pyhelpers_tutorial\images\python-logo.png": 81.6kB [00:00, 10.8MB/s]
```

Note:

- '...MB/s' shown at the end of the output above is an estimated speed of downloading the file, which varies depending on network conditions at the time of running the function.
- Setting `if_exists='replace'` (default) allows us to download the image file again and replace the one that was just downloaded to the specified destination.

Now let's have a look at the downloaded image file by using `Pillow`:

```
>>> from PIL import Image
>>> python_logo = Image.open(python_logo_file_path)
>>> python_logo.show()
```



Fig. 20: The Python Logo (for illustration in the brief tutorial).

Note:

- In [Jupyter Notebook](#), we may use `IPython.display.Image` to display the image in the notebook by running `IPython.display.Image(python_logo_file_path)`.

To delete "pyhelpers_tutorial\" and the download directory "pyhelpers_tutorial\images\", again, we can use the function `delete_dir()`:

```
>>> delete_dir(path_to_dir, confirmation_required=False, verbose=True)
Deleting "pyhelpers_tutorial\" ... Done.
```

Setting the parameter `confirmation_required=False` can allow us to delete the directory straightaway without having to type yes to confirm the action. This is actually implemented through the function `confirmed()`, which is also from the module `pyhelpers.ops` and can be helpful especially when we'd like to impose a manual confirmation before proceeding with certain actions. For example:

```
>>> from pyhelpers.ops import confirmed
>>> # We can specify any prompting message as to what needs to be confirmed.
>>> if confirmed(prompt="Continue? ..."):
...     print("OK! Go ahead.")
Continue? ... [No] | Yes: yes
OK! Go ahead.
```

Note:

- What we type to respond to the prompting message is case-insensitive. It doesn't have to be precisely Yes to make the function return True; something like yes, Y or ye can do the job as well. If we type no or n, it returns False.
- The function also provides a parameter `confirmation_required`, which defaults to True. If setting `confirmation_required=False`, a confirmation is not required, in which case this

function will become ineffective as it just returns True.

6.8 Work with a PostgreSQL server

The module `pyhelpers.dbms` offers a convenient way of communicating with databases, such as PostgreSQL.

Note:

- The current release of pyhelpers is only able to deal with PostgreSQL as the module `pyhelpers.dbms` needs to be further developed to work with other types of databases.

The class `PostgreSQL`, for example, could assist us in executing some basic SQL statements on a PostgreSQL database server. To demonstrate it works, let's start with importing the class:

```
>>> from pyhelpers.dbms import PostgreSQL
```

6.8.1 Connect to a database

Now, we can create an instance of the class `PostgreSQL` to connect a PostgreSQL server by specifying the key parameters, including host, port, username, database_name and password.

Note:

- If we leave host, port, username and database_name unspecified, their default arguments (namely, `host='localhost'`, `port=5432`, `username='postgres'` and `database_name='postgres'`) are passed to instantiate the class, in which case we would connect to the default PostgreSQL server (as is installed on a PC).
- If the specified database_name does not exist, it will be automatically created along with the class instantiation.
- If we prefer not to specify explicitly the parameter password, we could just leave it. In that case, we will be asked to type in the password manually when instantiating the class.

For example, let's create an instance named `postgres`, and we'd like to establish a connection with a database named "`pyhelpers_tutorial`", which is hosted at the default PostgreSQL server:

```
>>> postgres = PostgreSQL(database_name="pyhelpers_tutorial")
Password (postgres@localhost:5432): ***
Creating a database: "pyhelpers_tutorial" ... Done.
Connecting postgres:***@localhost:5432/pyhelpers_tutorial ... Successfully.
```

We can use pgAdmin - the most popular graphical management tool for PostgreSQL - to check whether the database "`pyhelpers_tutorial`" exists now in the Databases tree of the default server, as illustrated in Fig. 21:

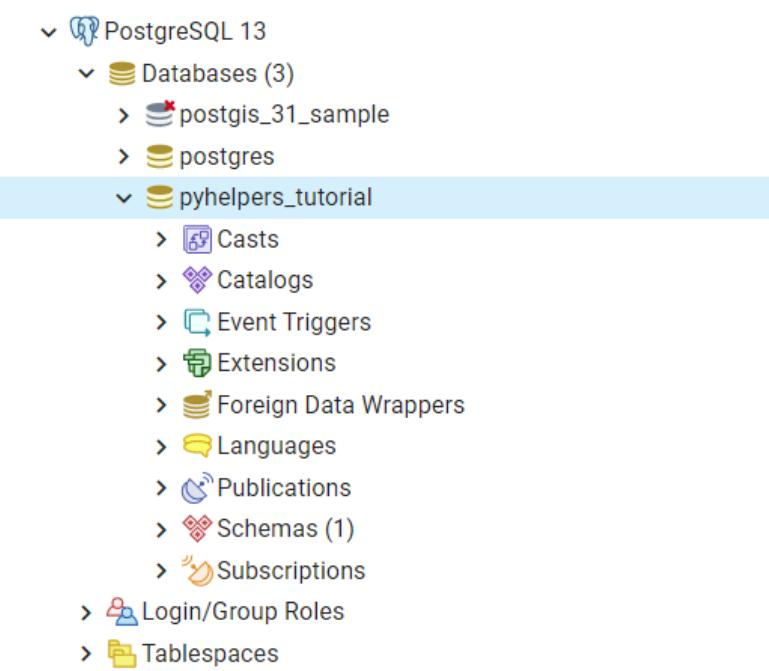


Fig. 21: The database “*pyhelpers_tutorial*”.

Alternatively, we could also use the method `database_exists()`:

```
>>> res = postgres.database_exists("pyhelpers_tutorial")
>>> print(f'The database "pyhelpers_tutorial" exists? {res}')
The database "pyhelpers_tutorial" exists? True

>>> print(f'We are currently connected to the database "{postgres.database_name}".')
We are now connected with the database "pyhelpers_tutorial".
```

In the same server, we can create multiple databases. For example, let's now create another database named “*pyhelpers_tutorial_alt*” by using the method `create_database()`:

```
>>> postgres.create_database("pyhelpers_tutorial_alt", verbose=True)
Creating a database: "pyhelpers_tutorial_alt" ... Done.
```

As we can see in Fig. 22, the database “*pyhelpers_tutorial_alt*” has now been added to the default *Databases* tree:

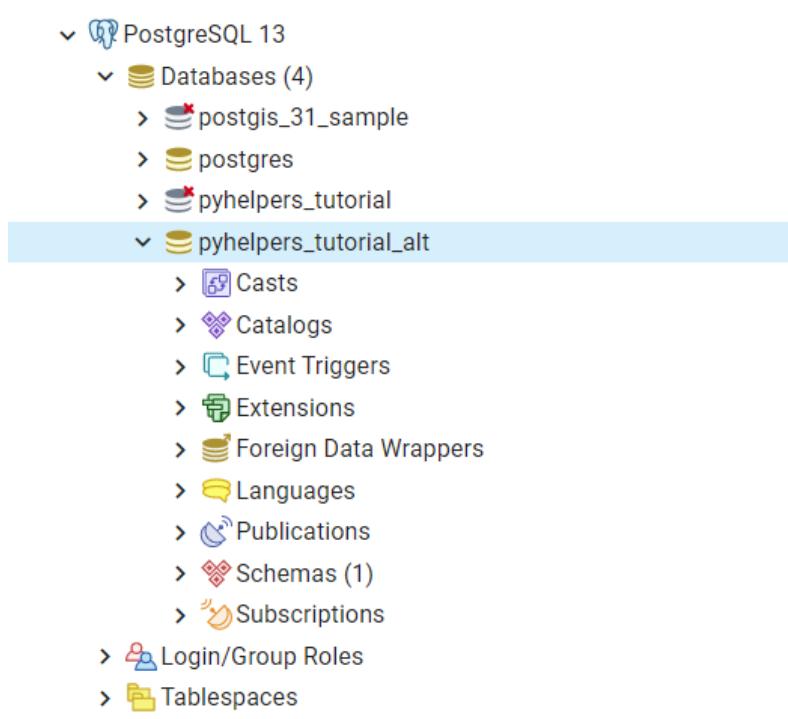


Fig. 22: The database “*pyhelpers_tutorial_alt*”.

Note:

- When a new database is created, the instance `postgres` disconnects the currently-connected database and connect to the new one.

Check whether “*pyhelpers_tutorial_alt*” is the database being connected now:

```
>>> res = postgres.database_exists("pyhelpers_tutorial_alt")
>>> print(f'The database "pyhelpers_tutorial_alt" exists? {res}')
The database "pyhelpers_tutorial_alt" exists? True

>>> print(f'We are currently connected to the database "{postgres.database_name}".')
We are now connected with the database "pyhelpers_tutorial_alt".
```

To connect again to “*pyhelpers_tutorial*”, we can use the method `connect_database()`:

```
>>> postgres.connect_database("pyhelpers_tutorial", verbose=True)
Connecting postgres:**@localhost:5432/pyhelpers_tutorial ... Successfully.

>>> print(f'We are currently connected to the database "{postgres.database_name}".')
We are now connected with the database "pyhelpers_tutorial".
```

6.8.2 Import data into a database

With the established connection to the database, we can use the method `import_data()` to import the `data_frame`, which has been created in the *Preparation* section, into a table named “`df_table`” under the default schema “`public`”:

```
>>> postgres.import_data(data=data_frame, table_name="df_table", verbose=2)
To import data into "public"."df_table" at postgres:***@localhost:5432/pyhelpers_tutorial
? [No] |Yes: yes
Importing the data into the table "public"."df_table" ... Done.
```

We should now be able to see the table in pgAdmin, as illustrated in Fig. 23:

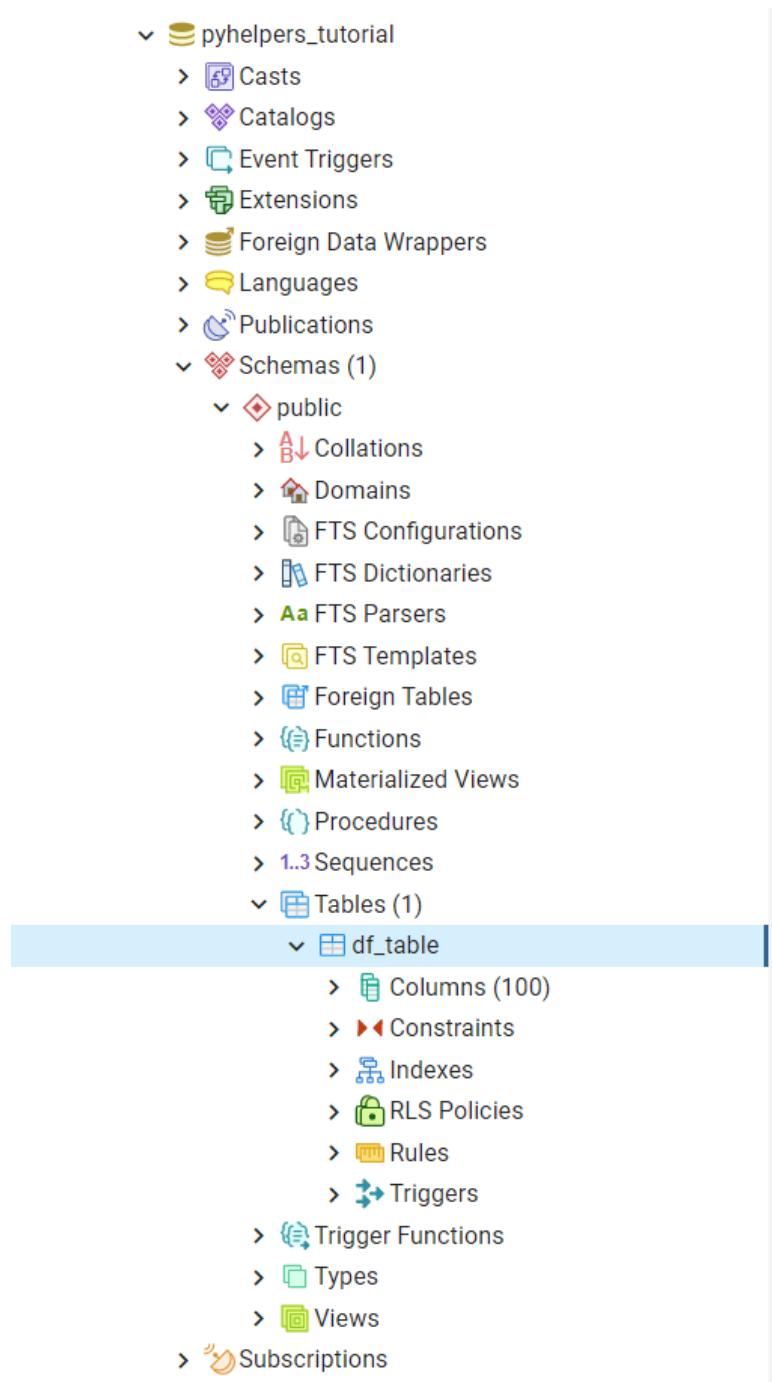


Fig. 23: The table “*public*”.*”df_table”*.

The method `import_data()` relies on the method `pandas.DataFrame.to_sql()`, with the parameter `method` being set to be 'multi' by default. Optionally, it can also take the method `psql_insert_copy()` as an argument to significantly speed up importing data into a database, especially when the data size is fairly large.

Let's now try to import the same data into a table named "*df_table_alt*" by setting `method=postgres.psql_insert_copy`:

```
>>> postgres.import_data(
...     data=data_frame, table_name="df_table_alt", method=postgres.sql_insert_copy, verbose=2)
To import data into "public"."df_table_alt" at postgres:***@localhost:5432/pyhelpers_tutorial
? [No] | Yes: yes
Importing the data into the table "public"."df_table_alt" ... Done.
```

In pgAdmin, we can see the table has been added to the *Tables* list, as illustrated in Fig. 24:

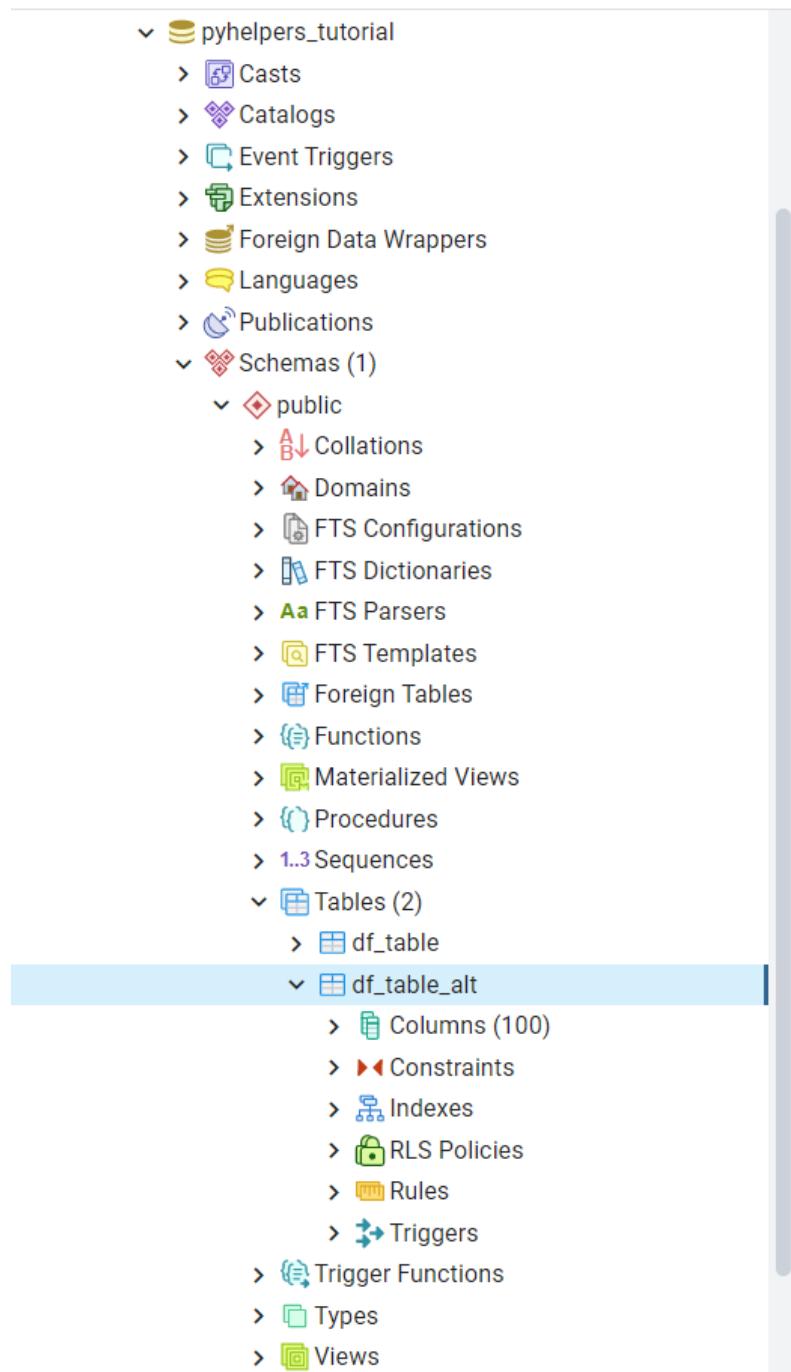


Fig. 24: The table “*public*.“*df_table_alt*”.

6.8.3 Fetch data from a database

To retrieve the imported data, we can use the method `read_table()`:

```
>>> df_retrieval_1 = postgres.read_table(table_name="df_table")

>>> res = df_retrieval_1.equals(data_frame)
>>> print(f" `df_retrieval_1` is equal to `data_frame`? {res}")
`df_retrieval_1` is equal to `data_frame`? True
```

Alternatively, we can also use the method `read_sql_query()`, which serves as a more flexible way of reading/querying data. It takes PostgreSQL statements, and could be much faster when the queried table is fairly large. Let's try this method to fetch the same data from the table "df_table_alt":

```
>>> df_retrieval_2 = postgres.read_sql_query(sql_query='SELECT * FROM "public"."df_table_alt"')

>>> res = df_retrieval_2.round(8).equals(df_retrieval_1.round(8))
>>> print(f" `df_retrieval_2` is equal to `df_retrieval_1`? {res}")
`df_retrieval_2` is equal to `df_retrieval_1`? True
```

Note:

- For the method `read_sql_query()`, any PostgreSQL statement that is passed to the parameter `sql_query` should NOT end with ';' .

6.8.4 Delete data

Before we leave this notebook, let's clear up the databases and tables we've created.

We can delete/drop a table (e.g. "df_table") by using the method `drop_table()`:

```
>>> postgres.drop_table(table_name="df_table", verbose=True)
To drop the table "public"."df_table" from postgres:***@localhost:5432/pyhelpers_tutorial
? [No] | Yes: yes
Dropping "public"."df_table" ... Done.
```

To delete/drop a database, we can use the method `drop_database()`:

```
>>> # Drop "pyhelpers_tutorial" (i.e. the currently connected database)
>>> postgres.drop_database(verbose=True)
To drop the database "pyhelpers_tutorial" from postgres:***@localhost:5432
? [No] | Yes: yes
Dropping "pyhelpers_tutorial" ... Done.

>>> # Drop "pyhelpers_tutorial_alt"
>>> postgres.drop_database(database_name="pyhelpers_tutorial_alt", verbose=True)
To drop the database "pyhelpers_tutorial_alt" from postgres:***@localhost:5432
? [No] | Yes: yes
Dropping "pyhelpers_tutorial_alt" ... Done.
```

Check which database is the one being currently connected:

```
>>> print(f"We are currently connected with the database \\"{postgres.database_name}\\".")  
We are currently connected with the database "postgres".
```

Now we have removed all the databases created above, and restored the PostgreSQL server to its original status.

This is the end of the [Quick start](#).

Any issues regarding the use of pyhelpers are all welcome and should be logged/reported onto [Issue Tracker](#).

For more details and examples, check [Modules](#).

Python Module Index

p

pyhelpers, 3
pyhelpers.dbms, 117
pyhelpers.dbms.utils, 173
pyhelpers.dirs, 11
pyhelpers.geom, 85
pyhelpers.ops, 21
pyhelpers.settings, 3
pyhelpers.store, 59
pyhelpers.text, 107

Index

A

add_primary_keys() (*pyhelpers.dbms.PostgreSQL method*),
 123
alter_table_schema() (*pyhelpers.dbms.PostgreSQL method*),
 123

C

calc_distance_on_unit_sphere() (*in module pyhelpers.geom*), 92
calc_hypotenuse_distance() (*in module pyhelpers.geom*),
 93
calculate_idf() (*in module pyhelpers.text*), 111
calculate_tf_idf() (*in module pyhelpers.text*), 113
cd() (*in module pyhelpers.dirs*), 11
cd_data() (*in module pyhelpers.dirs*), 14
cdd() (*in module pyhelpers.dirs*), 13
check_files_exist() (*in module pyhelpers.dirs*), 19
cmmap_discretisation() (*in module pyhelpers.ops*), 45
colour_bar_index() (*in module pyhelpers.ops*), 46
compare_dicts() (*in module pyhelpers.ops*), 35
confirmed() (*in module pyhelpers.ops*), 21
connect_database() (*pyhelpers.dbms.MSSQL method*), 151
connect_database() (*pyhelpers.dbms.PostgreSQL method*),
 124
cosine_similarity_between_texts() (*in module pyhelpers.text*), 114
count_words() (*in module pyhelpers.text*), 111
create_connection() (*pyhelpers.dbms.MSSQL method*), 151
create_cursor() (*pyhelpers.dbms.MSSQL method*), 152
create_database() (*pyhelpers.dbms.MSSQL method*), 153
create_database() (*pyhelpers.dbms.PostgreSQL method*), 125
create_engine() (*pyhelpers.dbms.MSSQL method*), 154
create_rotation_matrix() (*in module pyhelpers.ops*), 38
create_schema() (*pyhelpers.dbms.MSSQL method*), 155
create_schema() (*pyhelpers.dbms.PostgreSQL method*), 126
create_table() (*pyhelpers.dbms.MSSQL method*), 155
create_table() (*pyhelpers.dbms.PostgreSQL method*), 126
create_url() (*pyhelpers.ops.GitHubFileDownloader static method*), 57

D

database_exists() (*pyhelpers.dbms.MSSQL method*), 156
database_exists() (*pyhelpers.dbms.PostgreSQL method*), 128
DEFAULT_DATABASE (*pyhelpers.dbms.MSSQL attribute*), 148
DEFAULT_DATABASE (*pyhelpers.dbms.PostgreSQL attribute*), 120
DEFAULT_DIALECT (*pyhelpers.dbms.MSSQL attribute*), 148

DEFAULT_DIALECT (*pyhelpers.dbms.PostgreSQL attribute*), 120
DEFAULT_DRIVER (*pyhelpers.dbms.MSSQL attribute*), 149
DEFAULT_DRIVER (*pyhelpers.dbms.PostgreSQL attribute*), 120
DEFAULT_HOST (*pyhelpers.dbms.MSSQL attribute*), 149
DEFAULT_HOST (*pyhelpers.dbms.PostgreSQL attribute*), 120
DEFAULT_ODBC_DRIVER (*pyhelpers.dbms.MSSQL attribute*),
 149
DEFAULT_PORT (*pyhelpers.dbms.MSSQL attribute*), 149
DEFAULT_PORT (*pyhelpers.dbms.PostgreSQL attribute*), 121
DEFAULT_SCHEMA (*pyhelpers.dbms.MSSQL attribute*), 149
DEFAULT_SCHEMA (*pyhelpers.dbms.PostgreSQL attribute*), 121
DEFAULT_USERNAME (*pyhelpers.dbms.MSSQL attribute*), 149
DEFAULT_USERNAME (*pyhelpers.dbms.PostgreSQL attribute*), 121
delete_dir() (*in module pyhelpers.dirs*), 20
detect_nan_for_str_column() (*in module pyhelpers.ops*),
 37
dict_to_dataframe() (*in module pyhelpers.ops*), 38
disconnect_all_others() (*pyhelpers.dbms.PostgreSQL method*), 129
disconnect_database() (*pyhelpers.dbms.MSSQL method*),
 157
disconnect_database() (*pyhelpers.dbms.PostgreSQL method*), 129
download() (*pyhelpers.ops.GitHubFileDownloader method*), 58
download_file_from_url() (*in module pyhelpers.ops*), 54
download_single_file()
 (*pyhelpers.ops.GitHubFileDownloader method*), 58
drop_axis() (*in module pyhelpers.geom*), 89
drop_database() (*pyhelpers.dbms.MSSQL method*), 158
drop_database() (*pyhelpers.dbms.PostgreSQL method*), 130
drop_schema() (*pyhelpers.dbms.MSSQL method*), 158
drop_schema() (*pyhelpers.dbms.PostgreSQL method*), 131
drop_table() (*pyhelpers.dbms.MSSQL method*), 159
drop_table() (*pyhelpers.dbms.PostgreSQL method*), 132

E

euclidean_distance_between_texts() (*in module pyhelpers.text*), 114
eval_dtype() (*in module pyhelpers.ops*), 23
extract_words1upper() (*in module pyhelpers.text*), 109

F

fake_requests_headers() (*in module pyhelpers.ops*), 53
find_closest_date() (*in module pyhelpers.ops*), 44
find_closest_point() (*in module pyhelpers.geom*), 94
find_closest_points() (*in module pyhelpers.geom*), 95

find_executable() (*in module pyhelpers.ops*), 26
 find_matched_str() (*in module pyhelpers.text*), 115
 find_shortest_path() (*in module pyhelpers.geom*), 97
 find_similar_str() (*in module pyhelpers.text*), 116
 func_running_time() (*in module pyhelpers.ops*), 28

G

gdal_configurations() (*in module pyhelpers.settings*), 4
 get_acronym() (*in module pyhelpers.text*), 108
 get_column_dtype() (*pyhelpers.dbms.PostgreSQL method*), 132
 get_column_info() (*pyhelpers.dbms.PostgreSQL method*), 133
 get_column_names() (*pyhelpers.dbms.MSSQL method*), 160
 get_database_names() (*pyhelpers.dbms.MSSQL method*), 160
 get_database_names() (*pyhelpers.dbms.PostgreSQL method*), 133
 get_database_size() (*pyhelpers.dbms.PostgreSQL method*), 134
 get_default_database_address() (*in module pyhelpers.dbms.utils*), 174
 get_dict_values() (*in module pyhelpers.ops*), 34
 get_extreme_outlier_bounds() (*in module pyhelpers.ops*), 42
 get_file_pathnames() (*in module pyhelpers.dirs*), 18
 get_file_tables() (*pyhelpers.dbms.MSSQL method*), 161
 get_geometric_midpoint() (*in module pyhelpers.geom*), 101
 get_geometric_midpoint_calc() (*in module pyhelpers.geom*), 101
 get_midpoint() (*in module pyhelpers.geom*), 100
 get_number_of_chunks() (*in module pyhelpers.ops*), 25
 get_obj_attr() (*in module pyhelpers.ops*), 22
 get_primary_keys() (*pyhelpers.dbms.MSSQL method*), 161
 get_primary_keys() (*pyhelpers.dbms.PostgreSQL method*), 134
 get_rectangle_centroid() (*in module pyhelpers.geom*), 102
 get_relative_path() (*in module pyhelpers.ops*), 25
 get_row_count() (*pyhelpers.dbms.MSSQL method*), 162
 get_schema_info() (*pyhelpers.dbms.MSSQL method*), 163
 get_schema_names() (*pyhelpers.dbms.PostgreSQL method*), 136
 get_square_vertices() (*in module pyhelpers.geom*), 103
 get_square_vertices_calc() (*in module pyhelpers.geom*), 104
 get_table_names() (*pyhelpers.dbms.MSSQL method*), 164
 get_table_names() (*pyhelpers.dbms.PostgreSQL method*), 137
 get_user_agent_string() (*in module pyhelpers.ops*), 53
 GitHubFileDownloader (*class in pyhelpers.ops*), 56
 go_from_altered_cwd() (*in module pyhelpers.dirs*), 12
 gps_to_utc() (*in module pyhelpers.ops*), 23

H

has_dtypes() (*pyhelpers.dbms.MSSQL method*), 165
 hash_password() (*in module pyhelpers.ops*), 27

I

import_data() (*pyhelpers.dbms.MSSQL method*), 166
 import_data() (*pyhelpers.dbms.PostgreSQL method*), 138

init_requests_session() (*in module pyhelpers.ops*), 51
 interquartile_range() (*in module pyhelpers.ops*), 43
 is_dir() (*in module pyhelpers.dirs*), 16
 is_downloadable() (*in module pyhelpers.ops*), 50
 is_network_connected() (*in module pyhelpers.ops*), 49
 is_url() (*in module pyhelpers.ops*), 49
 is_url_connectable() (*in module pyhelpers.ops*), 50

L

load_csv() (*in module pyhelpers.store*), 72
 load_data() (*in module pyhelpers.store*), 78
 load_feather() (*in module pyhelpers.store*), 77
 load_joblib() (*in module pyhelpers.store*), 76
 load_json() (*in module pyhelpers.store*), 75
 load_pickle() (*in module pyhelpers.store*), 72
 load_spreadsheets() (*in module pyhelpers.store*), 74
 load_user_agent_strings() (*in module pyhelpers.ops*), 52
 loop_in_pairs() (*in module pyhelpers.ops*), 29

M

make_database_address() (*in module pyhelpers.dbms.utils*), 173
 markdown_to_rst() (*in module pyhelpers.store*), 82
 merge_dicts() (*in module pyhelpers.ops*), 36
 module
 pyhelpers, 3
 pyhelpers.dbms, 117
 pyhelpers.dbms.utils, 173
 pyhelpers.dirs, 11
 pyhelpers.geom, 85
 pyhelpers.ops, 21
 pyhelpers.settings, 3
 pyhelpers.store, 59
 pyhelpers.text, 107
 mpl_preferences() (*in module pyhelpers.settings*), 5
 MSSQL (*class in pyhelpers.dbms*), 147
 mssql_to_postgresql() (*in module pyhelpers.dbms.utils*), 174

N

np_preferences() (*in module pyhelpers.settings*), 7
 np_shift() (*in module pyhelpers.ops*), 41
 null_text_to_empty_string() (*pyhelpers.dbms.PostgreSQL method*), 139
 numeral_english_to_arabic() (*in module pyhelpers.text*), 110

O

osgb36_to_wgs84() (*in module pyhelpers.geom*), 87

P

parse_csr_matrix() (*in module pyhelpers.ops*), 39
 parse_size() (*in module pyhelpers.ops*), 24
 path2linux() (*in module pyhelpers.dirs*), 15
 pd_preferences() (*in module pyhelpers.settings*), 9
 PostgreSQL (*class in pyhelpers.dbms*), 118
 project_point_to_line() (*in module pyhelpers.geom*), 90

psql_insert_copy() (*pyhelpers.dbms.PostgreSQL static method*), 141
 pyhelpers
 module, 3
 pyhelpers.dbms
 module, 117
 pyhelpers.dbms.utils
 module, 173
 pyhelpers.dirs
 module, 11
 pyhelpers.geom
 module, 85
 pyhelpers.ops
 module, 21
 pyhelpers.settings
 module, 3
 pyhelpers.store
 module, 59
 pyhelpers.text
 module, 107

R

read_columns() (*pyhelpers.dbms.MSSQL method*), 168
 read_sql_query() (*pyhelpers.dbms.MSSQL method*), 169
 read_sql_query() (*pyhelpers.dbms.PostgreSQL method*), 141
 read_table() (*pyhelpers.dbms.MSSQL method*), 169
 read_table() (*pyhelpers.dbms.PostgreSQL method*), 144
 remove_dict_keys() (*in module pyhelpers.ops*), 35
 remove_punctuation() (*in module pyhelpers.text*), 108

S

save_data() (*in module pyhelpers.store*), 70
 save_feather() (*in module pyhelpers.store*), 65
 save_fig() (*in module pyhelpers.store*), 67
 save_joblib() (*in module pyhelpers.store*), 64
 save_json() (*in module pyhelpers.store*), 63
 save_pickle() (*in module pyhelpers.store*), 59
 save_spreadsheet() (*in module pyhelpers.store*), 60
 save_spreadsheets() (*in module pyhelpers.store*), 61
 save_svg_as_emf() (*in module pyhelpers.store*), 66
 save_web_page_as_pdf() (*in module pyhelpers.store*), 69
 schema_exists() (*pyhelpers.dbms.MSSQL method*), 171
 schema_exists() (*pyhelpers.dbms.PostgreSQL method*), 145
 seven_zip() (*in module pyhelpers.store*), 81
 sketch_square() (*in module pyhelpers.geom*), 105
 specify_conn_str() (*pyhelpers.dbms.MSSQL method*), 172
 split_iterable() (*in module pyhelpers.ops*), 31
 split_list() (*in module pyhelpers.ops*), 30
 split_list_by_size() (*in module pyhelpers.ops*), 30
 swap_cols() (*in module pyhelpers.ops*), 40
 swap_rows() (*in module pyhelpers.ops*), 40

T

table_exists() (*pyhelpers.dbms.MSSQL method*), 172
 table_exists() (*pyhelpers.dbms.PostgreSQL method*), 146
 transform_geom_point_type() (*in module pyhelpers.geom*),
 85

U

uniform.pathname() (*in module pyhelpers.dirs*), 15
 unzip() (*in module pyhelpers.store*), 80
 update_dict() (*in module pyhelpers.ops*), 32
 update_dict_keys() (*in module pyhelpers.ops*), 33

V

validate_dir() (*in module pyhelpers.dirs*), 16
 validate_filename() (*in module pyhelpers.dirs*), 17
 verify_password() (*in module pyhelpers.ops*), 28

W

wgs84_to_osgb36() (*in module pyhelpers.geom*), 86

X

xlsx_to_csv() (*in module pyhelpers.store*), 83